

NEMA

Model JEP.504DP
MFG PN: T56 1/2U4B

Model JEP.504DP

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
JEP.504DP	0.5	1750	208-230/460	3	60	56J	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techtopcanada.com

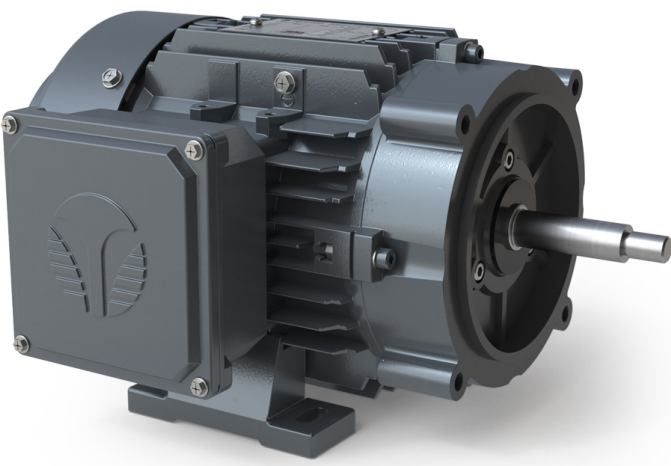

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model JEP.504DP
MFG PN: T56 1/2U4B


ELECTRICAL DATA		
Rated Motor Output Power	0.5	HP
	-	kW
Rated Motor Speed	1750	r/min 60Hz
	1430	r/min 50Hz
Rated Motor Voltage (+/-10%)	208-230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	1.76-1.8/0.9	A (I _n) @ 60Hz
	1.98/0.99	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	5.77	A (I _n) @ 60Hz
FI Current @ 208V	1.76	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	L	60Hz
	H	50Hz
Nominal Efficiency	78.5	% @ 60Hz
Nominal Power Factor	0.66	cosΦ @ 60Hz
Leads (Qty, Size)	9	18
Connection	YY/Y	-
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	25.4	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	56J	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	17.7 lbs.	
Casing Material / Fan Cover	Cast Aluminum	Steel
Shaft Material	304 SS	
NEMA Design	B	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	NO
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6204 2RS	
Bearing ODE Side	6204 2RS	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	T4	-

Questions? Call 1.888.286.1820

NEMA

Model JEP.504DP
MFG PN: T56 1/2U4B

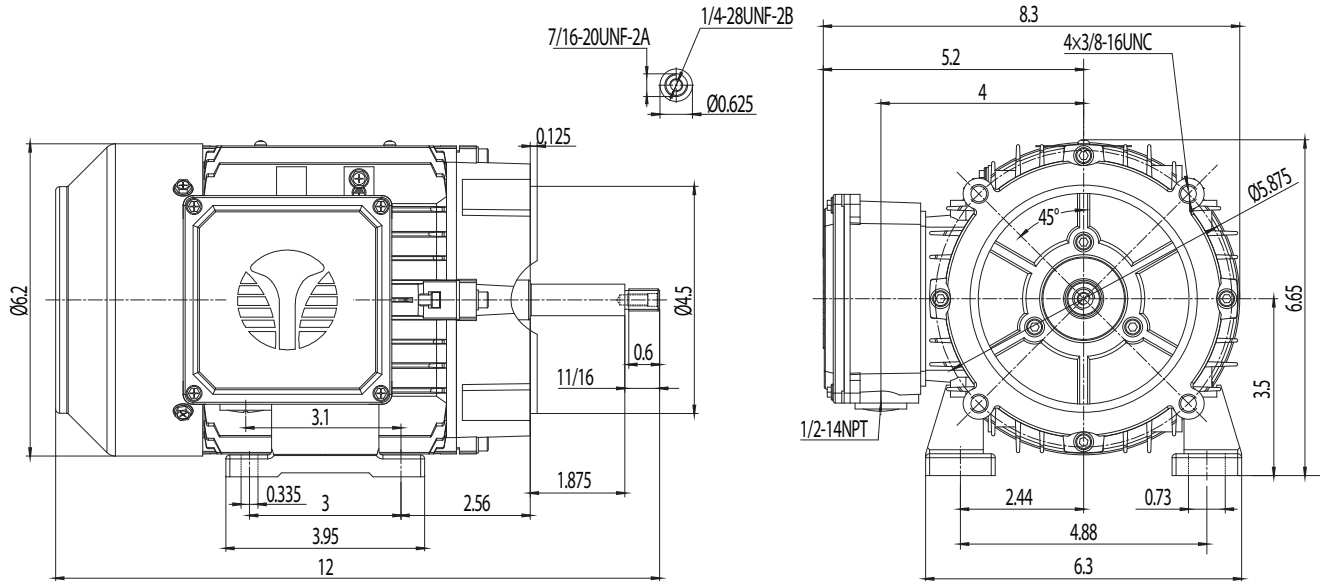

NAMEPLATE DATA	60Hz	50Hz
Horse Power	0.5	0.5
RPM	1750	1430
Voltage	208-230/460	190/380
Full Load Amps	1.76-1.8/0.9	1.98/0.99
Service Factor	1.25	1
KVA Code	L	H
Full Load Amps (208V)	1.76	-
Nominal Efficiency	78.5	77
Nominal Power Factor	0.66	-
Design	B	
Frame	56J	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6204 2RS	
Opposite Drive End Bearing	6204 2RS	
Weight (lbs)	17.7	

NAMEPLATE LAYOUT

TECHTOP THREE PHASE JET PUMP MOTOR
INVERTER DUTY 30:1 VT - 1.0 SF

MODEL	60Hz	50Hz	MFG PN	
HP			MFG DATE	
RPM			SER #	
VOLT			DESIGN	
FLA			FRAME	
SF			ENCL / IP	
KVA CODE			DUTY	
NOM.EFF			INS CL	
EFF 75%			AMB	
PF			DE	
USABLE AT 208V			ODE	
	A		WEIGHT	lbs

CLASS 1, DIV 2, GROUPS A, B, C AND D COMPLIANT

NEMA Premium
TECHTOPCANADA.COM

MADE IN CHINA

CC088A
E323353
C-ULUS
224653
Energy Verified Only

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	CSA CERTIFIED
Class / Division	Class I, Division II
Groups	A, B, C & D

Questions? Call 1.888.286.1820

NEMA

Model JEP.504DP
MFG PN: T56 1/2U4B

Torque Speed (T-n) Curve

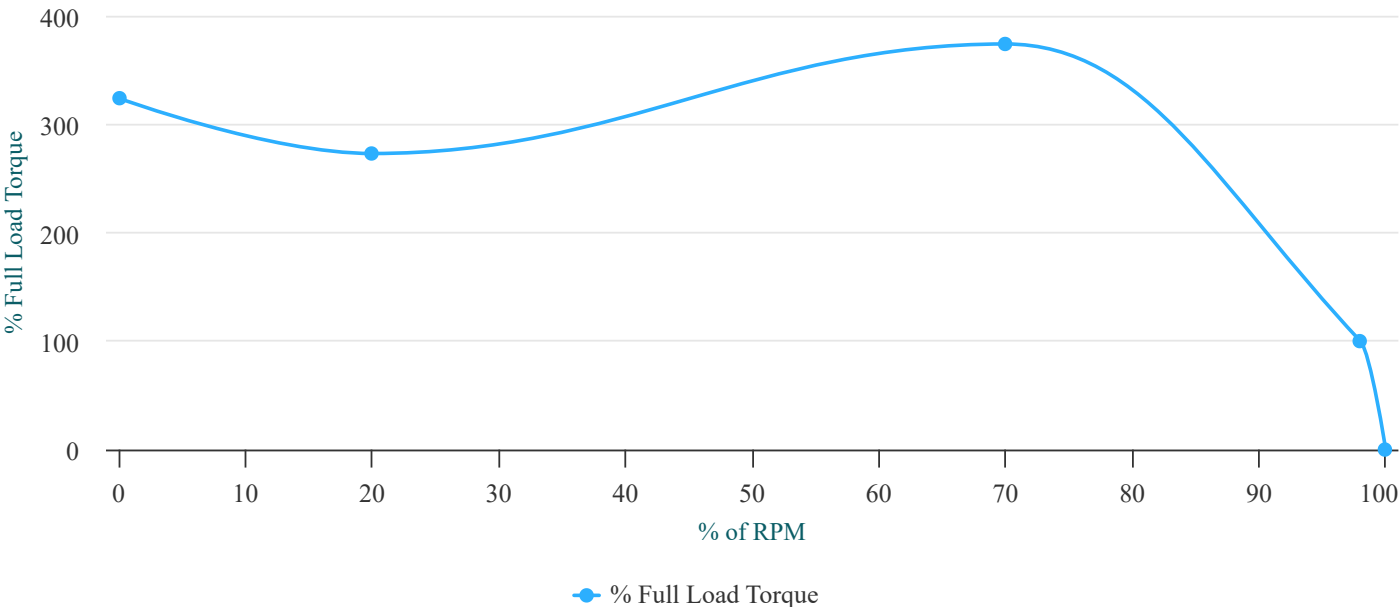

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)
Locked Rotor Torque	1.5	324
Pull-Up Torque	4.1	273
Breakdown Torque	5.6	374
Full Load Torque	4.9	100

TYPICAL PERFORMANCE - NOT GUARANTEED VALUES



PERFORMANCE VALUES	
Start Configuration	DOL
Starting Current (A)	5.77
No-Load Current (A)	0.7
No-Load Power Factor	-

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	0.7	0.8	0.8	0.9	1	1
Efficiency (%)	57.9	71.9	77.3	79.4	79.8	79.8
Speed (r/min)	1787	1776	1764	1750	1736	1736
Power Factor (cosΦ)	0.28	0.43	0.56	0.65	0.73	0.73
Input Power (kW)	0.16	0.26	0.36	0.47	0.59	0.59


Questions? Call 1.888.286.1820



Model JEP.504DP
MFG PN: T56 1/2U4B

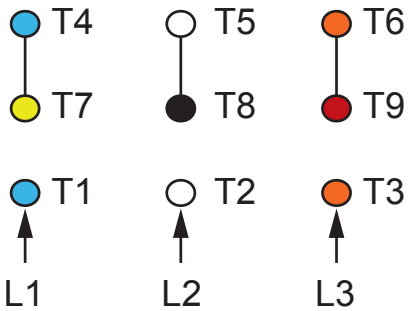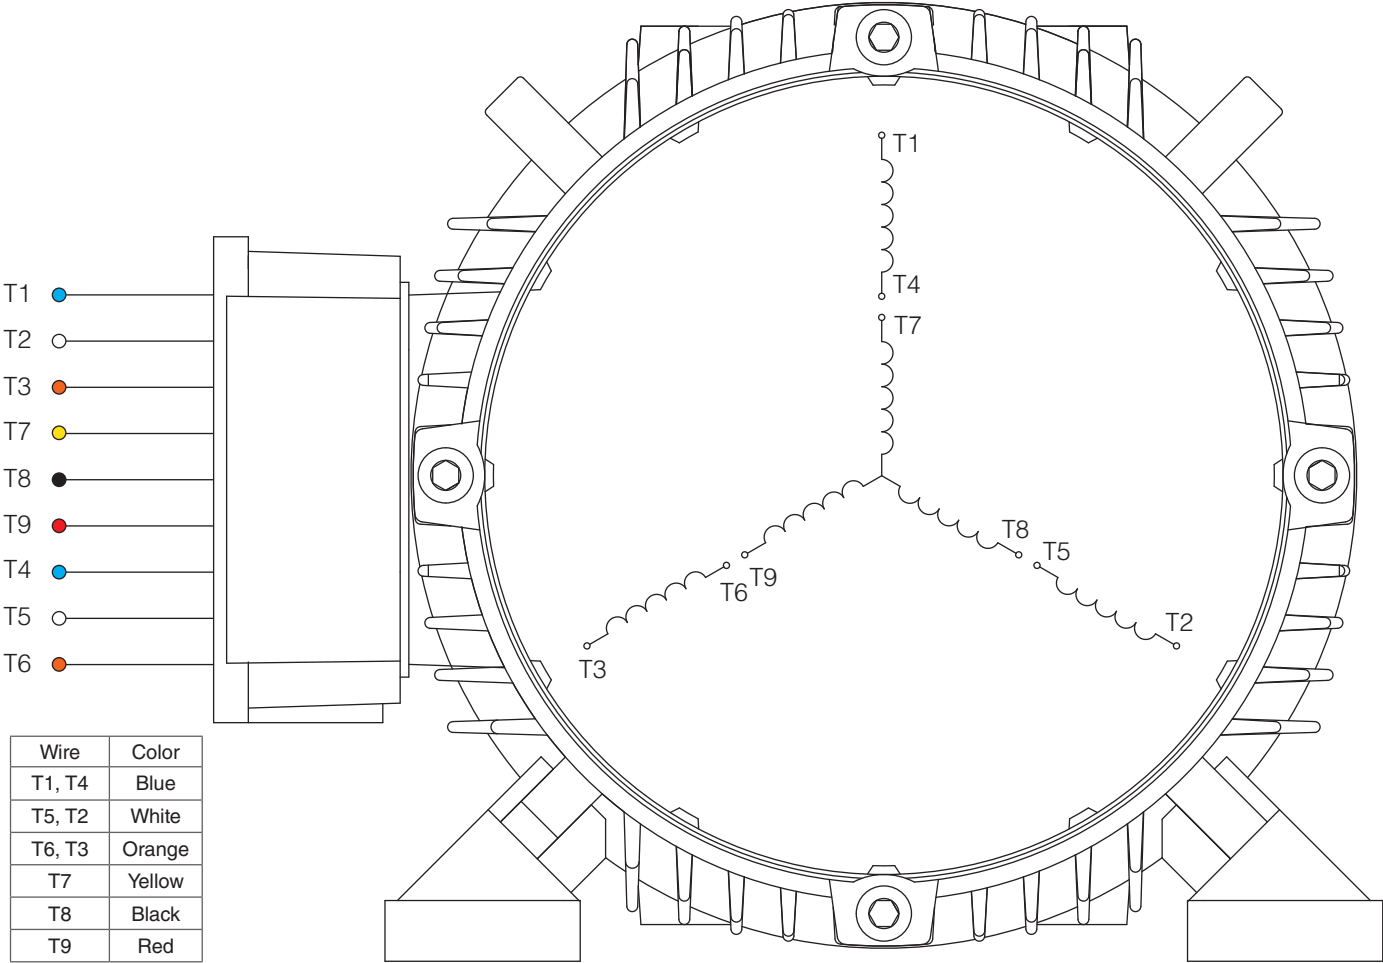

HIGH VOLTAGE
(Y)

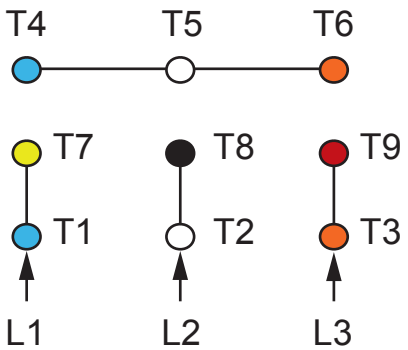

LOW VOLTAGE
(YY)

- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY



 TECHTOP <i>You can't top a Techtop.</i>		NEMA 3Ø YY/Y 9-Lead Dual Voltage	
DRAWING NUMBER:	NEMA-3-9-YY-Y	ISSUED DATE	04/08/25
CONNECTION:	YY/Y		
NUMBER OF LEADS:	9		
THERMAL PROTECTION:	-	PREMIUM 56J JET PUMP MOTORS	

NEMA 3Ø YY/Y 9-Lead Dual Voltage



NEMA Premium TEFC 56J

DRAWING NUMBER:	GR3-AL-TF-56J	ISSUED DATE	04/08/25
DIMENSIONS:	Inches		
MOUNTING:	Rigid/C-Flange	PREMIUM 56J JET PUMP MOTORS	
CASING MATERIAL:	Cast Aluminum		