

NEMA

Model JPA0104DP
MFG PN: T215T 10U4B

Model JPA0104DP

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
JPA0104DP	10	1760	230/460	3	60	215JP	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techttopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techttopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techttopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techttopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techttopcanada.com

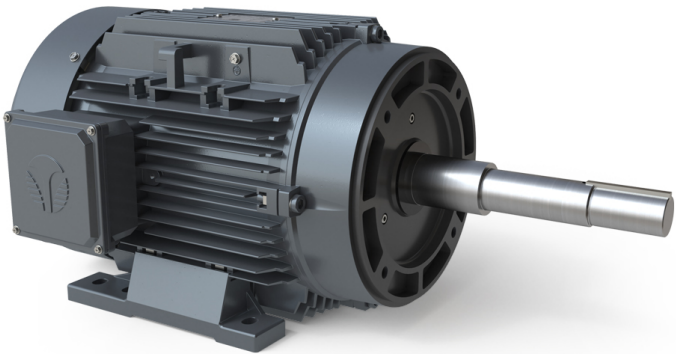

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model JPA0104DP
MFG PN: T215T 10U4B


ELECTRICAL DATA		
Rated Motor Output Power	10	HP
	-	kW
Rated Motor Speed	1760	r/min 60Hz
	1455	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	23.9/12.0	A (I _n) @ 60Hz
	28.0/14.0	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	124.2	A (I _n) @ 60Hz
FI Current @ 208V	26.3	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	L	60Hz
	J	50Hz
Nominal Efficiency	91.7	% @ 60Hz
Nominal Power Factor	0.86	cosΦ @ 60Hz
Leads (Qty, Size)	9	14
Connection	YY/Y	-
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	1000:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	50	°C @ 60Hz
	75	°C @ 50Hz

GENERAL DATA		
Frame Size	215JP	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	131 lbs.	
Casing Material / Fan Cover	Cast Aluminum	Steel
Shaft Material	304 SS	
NEMA Design	A	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6210 2RS	
Bearing ODE Side	6208 2RS	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	64.6	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	T3A	-

Questions? Call 1.888.286.1820

NEMA

Model JPA0104DP
MFG PN: T215T 10U4B

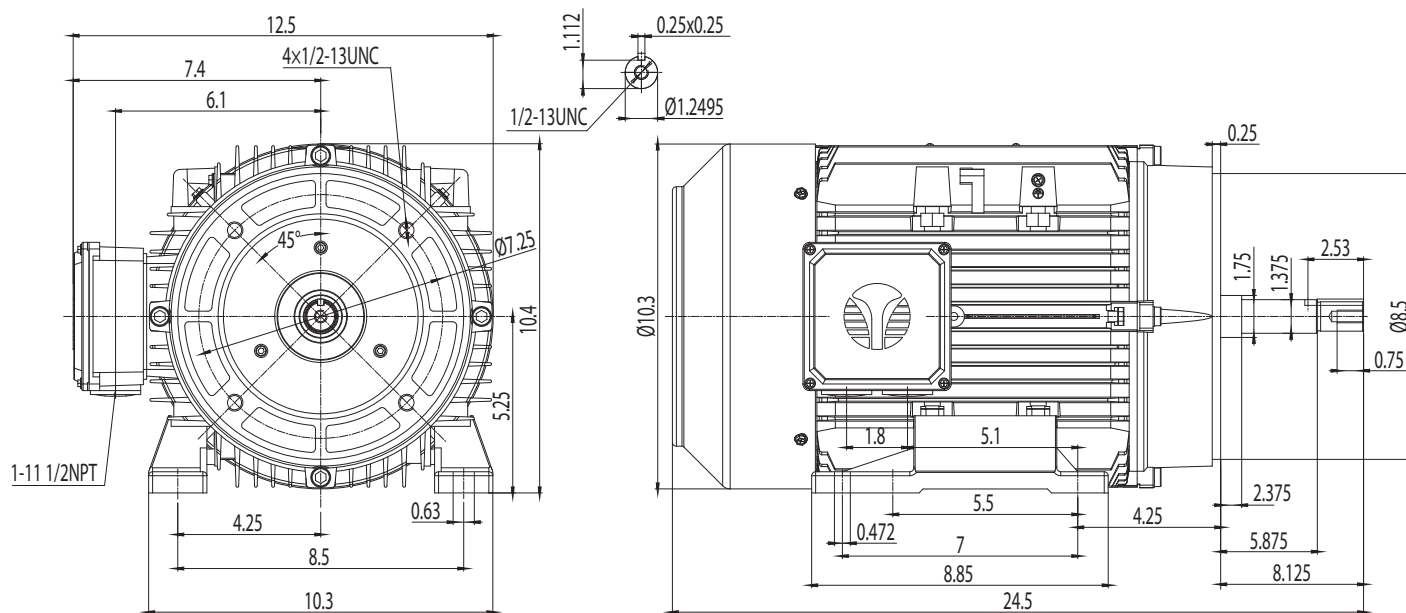

NAMEPLATE DATA	60Hz	50Hz
Horse Power	10	10
RPM	1760	1455
Voltage	230/460	190/380
Full Load Amps	23.9/12.0	28.0/14.0
Service Factor	1.25	1
KVA Code	L	J
Full Load Amps (208V)	26.3	-
Nominal Efficiency	91.7	90.8
Nominal Power Factor	0.86	-
Design	A	
Frame	215JP	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6210 2RS	
Opposite Drive End Bearing	6208 2RS	
Weight (lbs)	131	

NAMEPLATE LAYOUT

TECHTOP INDUSTRIAL THREE PHASE PUMP MOTOR
INVERTER DUTY 1000:1 VT - 1.0 SF

MODEL MFG PN
 60Hz 50Hz MFG DATE
 HP SER #
 RPM DESIGN
 VOLT FRAME
 FLA ENCL / IP
 SF DUTY
 KVA CODE INS CL
 NOM.EFF AMB
 EFF 75% DE
 PF ODE
 USABLE AT 208V WEIGHT lbs

NEMA Premium
TECHTOPCANADA.COM

CLASS 1, DIV 2, GROUPS A, B, C AND D

MADE IN CHINA

CC0088A
E323353
SP
C224653
Energy Verified Only

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	1000:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	CSA CERTIFIED
Class / Division	Class I, Division II
Groups	A, B, C & D

Questions? Call 1.888.286.1820

NEMA

Model JPA0104DP
MFG PN: T215T 10U4B

Torque Speed (T-n) Curve

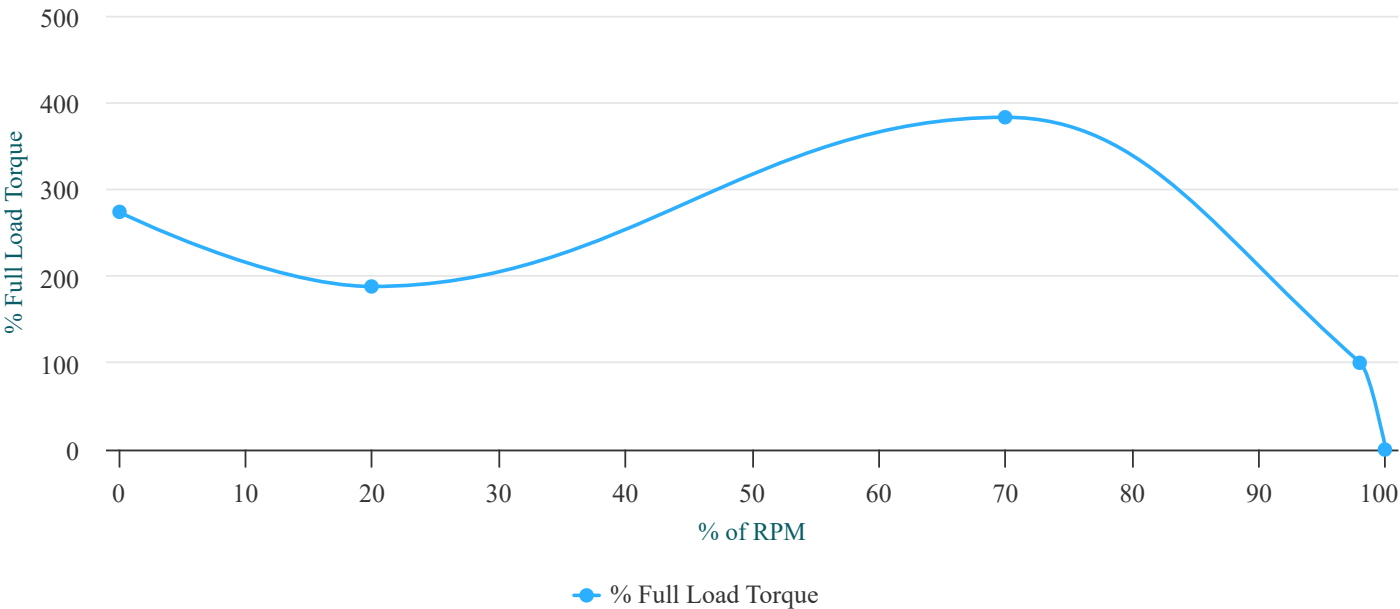

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	29.8	274	Start Configuration	DOL
Pull-Up Torque	56.1	188	Starting Current (A)	124.2
Breakdown Torque	114.3	383	No-Load Current (A)	5
Full Load Torque	81.8	100	No-Load Power Factor	0.07



TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	5.5	7.3	9.5	12	14.8	14.8
Efficiency (%)	86.8	91.3	92.1	91.9	91.2	91.2
Speed (r/min)	1792	1785	1777	1768	1758	1758
Power Factor (cosΦ)	0.49	0.7	0.81	0.85	0.87	0.87
Input Power (kW)	2.16	4.11	6.11	8.16	10.28	10.28


Questions? Call 1.888.286.1820



Model JPA0104DP
MFG PN: T215T 10U4B

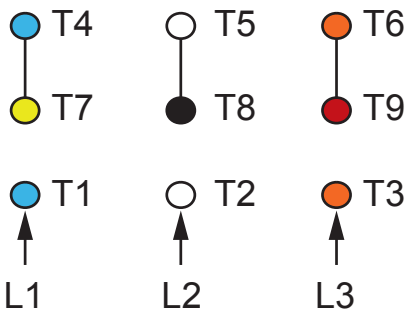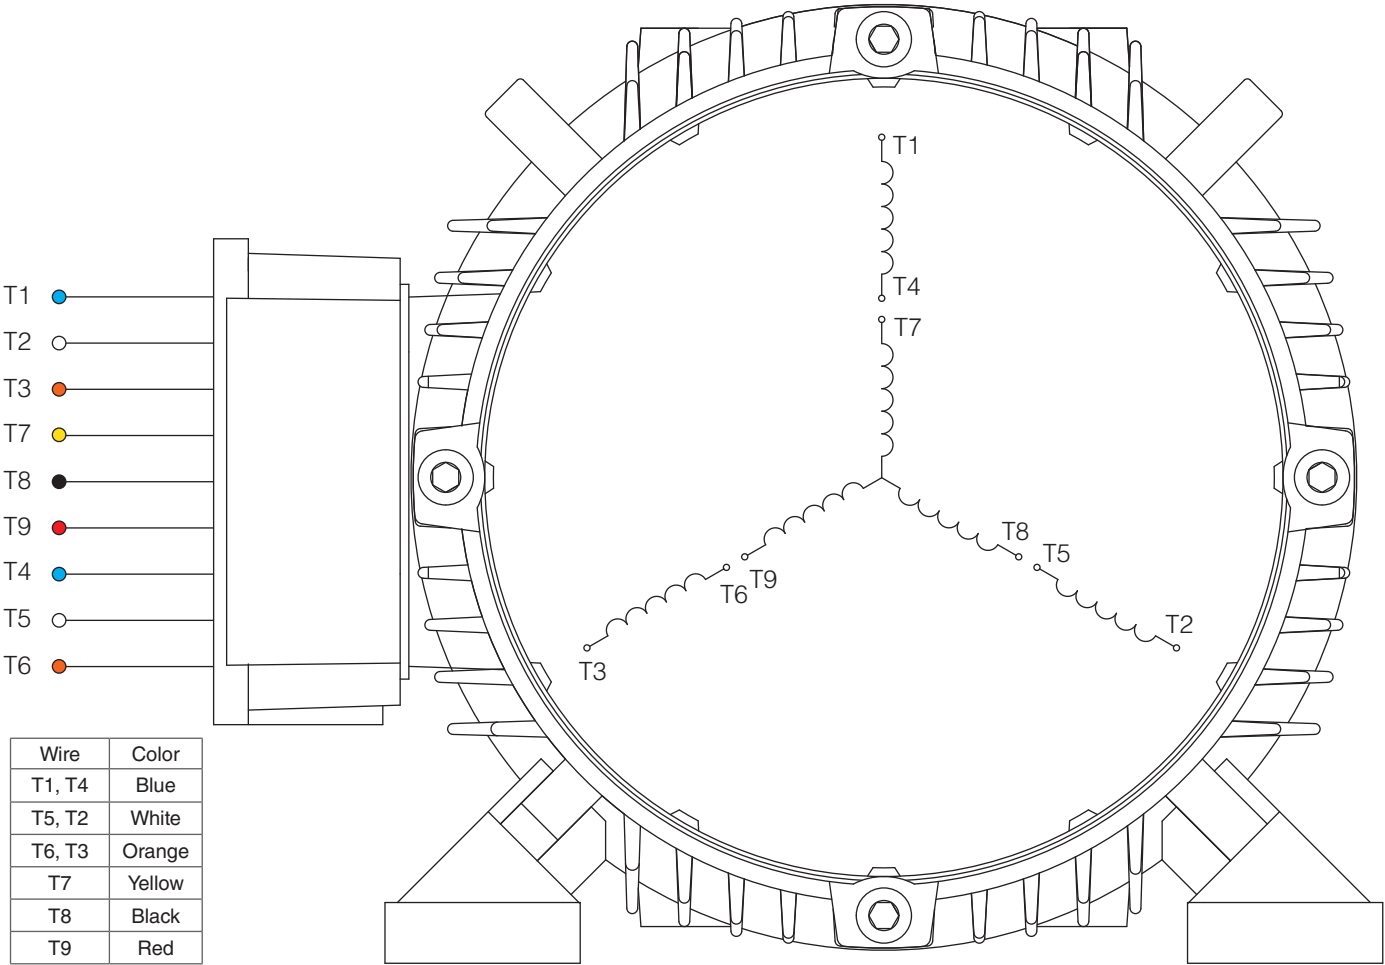

HIGH VOLTAGE
(Y)

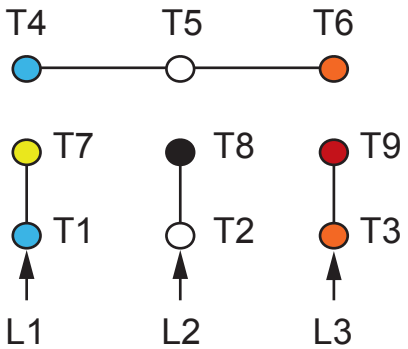

LOW VOLTAGE
(YY)


- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY



DRAWING NUMBER:	NEMA-3-9-YY-Y
CONNECTION:	YY/Y
NUMBER OF LEADS:	9
THERMAL PROTECTION:	-

NEMA 3Ø YY/Y 9-Lead Dual Voltage

ISSUED DATE	25/08/25
PREMIUM JM-JP PUMP MOTORS	



 TECHTOP <i>You can't top a Techtop.</i>		NEMA Premium TEFC 215JP	
DRAWING NUMBER:	GR3-AL-TF-210JP	ISSUED DATE	25/08/25
DIMENSIONS:	Inches	PREMIUM JM-JP PUMP MOTORS	
MOUNTING:	Rigid/C-Flange		
CASING MATERIAL:	Cast Aluminum		