

NEMA

Model JPA0152DPS
MFG PN: T215T 15U2B

Model JPA0152DPS

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
JPA0152DPS	15	3530	230/460	3	60	215JP	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techtopcanada.com

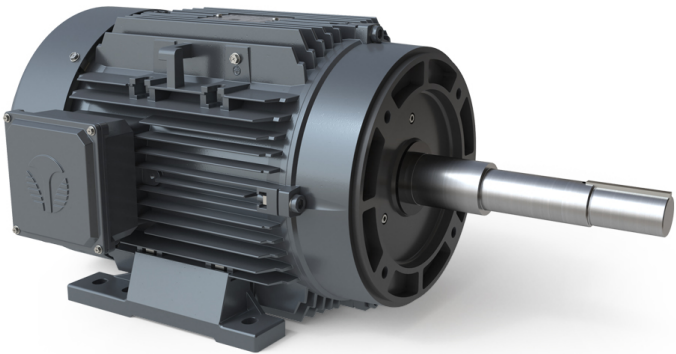

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model JPA0152DPS
MFG PN: T215T 15U2B


ELECTRICAL DATA		
Rated Motor Output Power	15	HP
	-	kW
Rated Motor Speed	3530	r/min 60Hz
	2910	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	33.0/16.5	A (I _n) @ 60Hz
	38.6/19.3	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	186	A (I _n) @ 60Hz
FI Current @ 208V	35.6	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	L	60Hz
	H	50Hz
Nominal Efficiency	91	% @ 60Hz
Nominal Power Factor	0.92	cosΦ @ 60Hz
Leads (Qty, Size)	9	14
Connection	YY/Y	-
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	1000:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	48	°C @ 60Hz
	66	°C @ 50Hz

GENERAL DATA		
Frame Size	215JP	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	135 lbs.	
Casing Material / Fan Cover	Cast Aluminum	Steel
Shaft Material	304 SS	
NEMA Design	A	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6210 2RS	
Bearing ODE Side	6208 2RS	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	T3A	-

Questions? Call 1.888.286.1820

NEMA

Model JPA0152DPS
MFG PN: T215T 15U2B

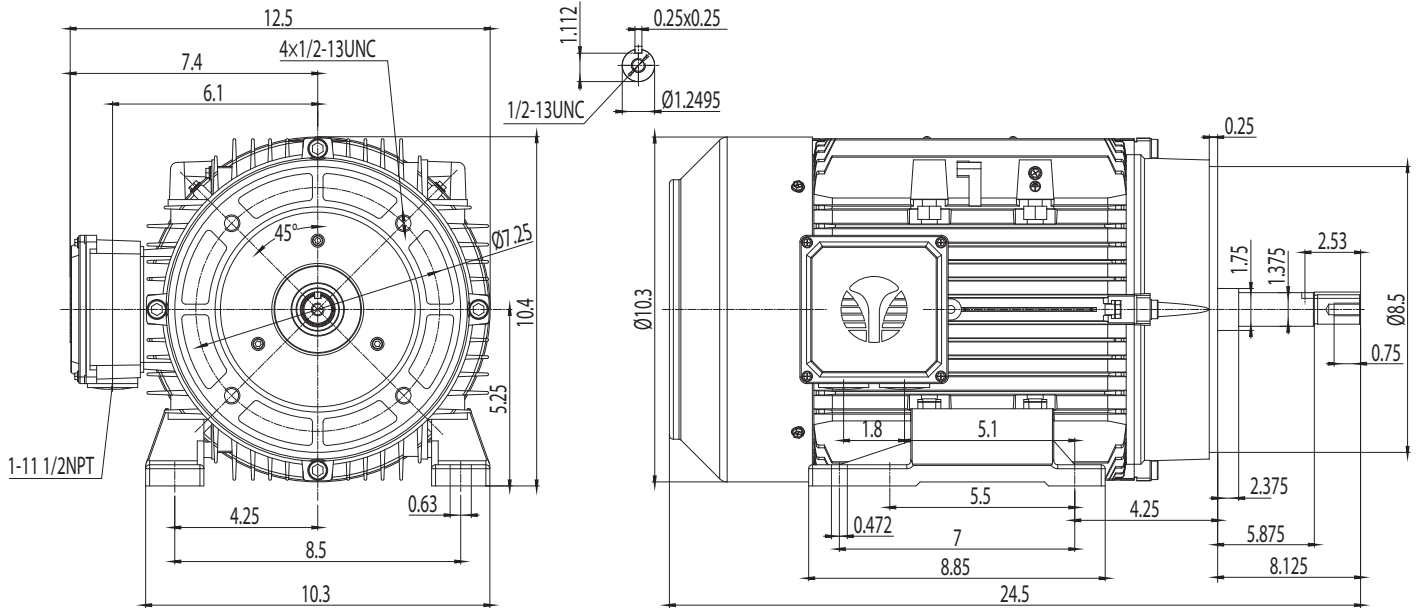

NAMEPLATE DATA	60Hz	50Hz
Horse Power	15	15
RPM	3530	2910
Voltage	230/460	190/380
Full Load Amps	33.0/16.5	38.6/19.3
Service Factor	1.25	1
KVA Code	L	H
Full Load Amps (208V)	35.6	-
Nominal Efficiency	91	90.5
Nominal Power Factor	0.92	-
Design	A	
Frame	215JP	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6210 2RS	
Opposite Drive End Bearing	6208 2RS	
Weight (lbs)	135	

NAMEPLATE LAYOUT

TECHTOP		INDUSTRIAL THREE PHASE PUMP MOTOR INVERTER DUTY 1000:1 VT - 1.0 SF	
MODEL		MFG PN	
60Hz		50Hz	
HP		MFG DATE	
RPM		SER #	
VOLT		DESIGN	
FLA		FRAME	
SF		ENCL / IP	
KVA CODE		DUTY	
NOM.EFF		INS CL	
EFF 75%		AMB	
PF		DE	
USABLE AT 208V		ODE	
NEMA Premium® TECHTOPCANADA.COM		WEIGHT	lbs
CLASS 1, DIV 2, GROUPS A, B, C AND D		MADE IN CHINA	

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	1000:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	CSA CERTIFIED
Class / Division	Class I, Division II
Groups	A, B, C & D

Questions? Call 1.888.286.1820

NEMA

Model JPA0152DPS
MFG PN: T215T 15U2B

Torque Speed (T-n) Curve

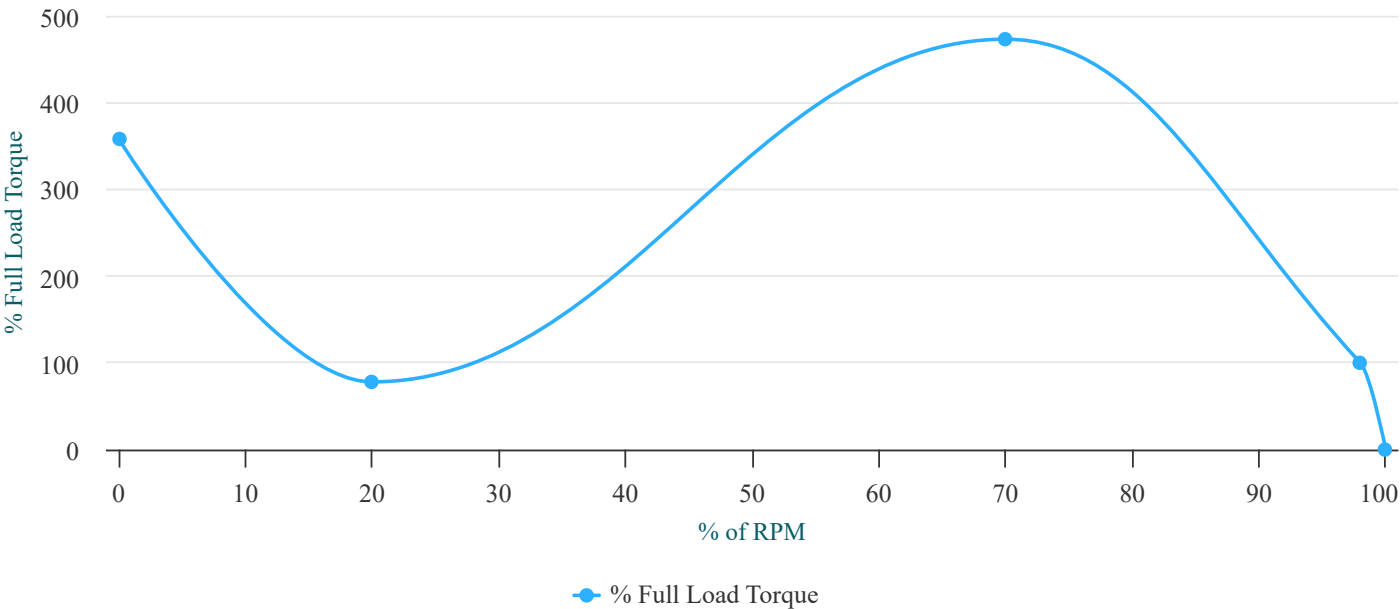

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	22.3	358	Start Configuration	DOL
Pull-Up Torque	17.4	78	Starting Current (A)	186
Breakdown Torque	105.6	473	No-Load Current (A)	4.6
Full Load Torque	79.9	100	No-Load Power Factor	0.09


TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	6	9	12.4	16.2	20.3	20.3
Efficiency (%)	88.4	92.2	92.7	92.4	91.5	91.5
Speed (r/min)	3582	3566	3548	3529	3510	3510
Power Factor (cosΦ)	0.65	0.83	0.9	0.92	0.93	0.93
Input Power (kW)	3.11	5.97	8.9	11.91	15.02	15.02


Questions? Call 1.888.286.1820




Model JPA0152DPS
MFG PN: T215T 15U2B

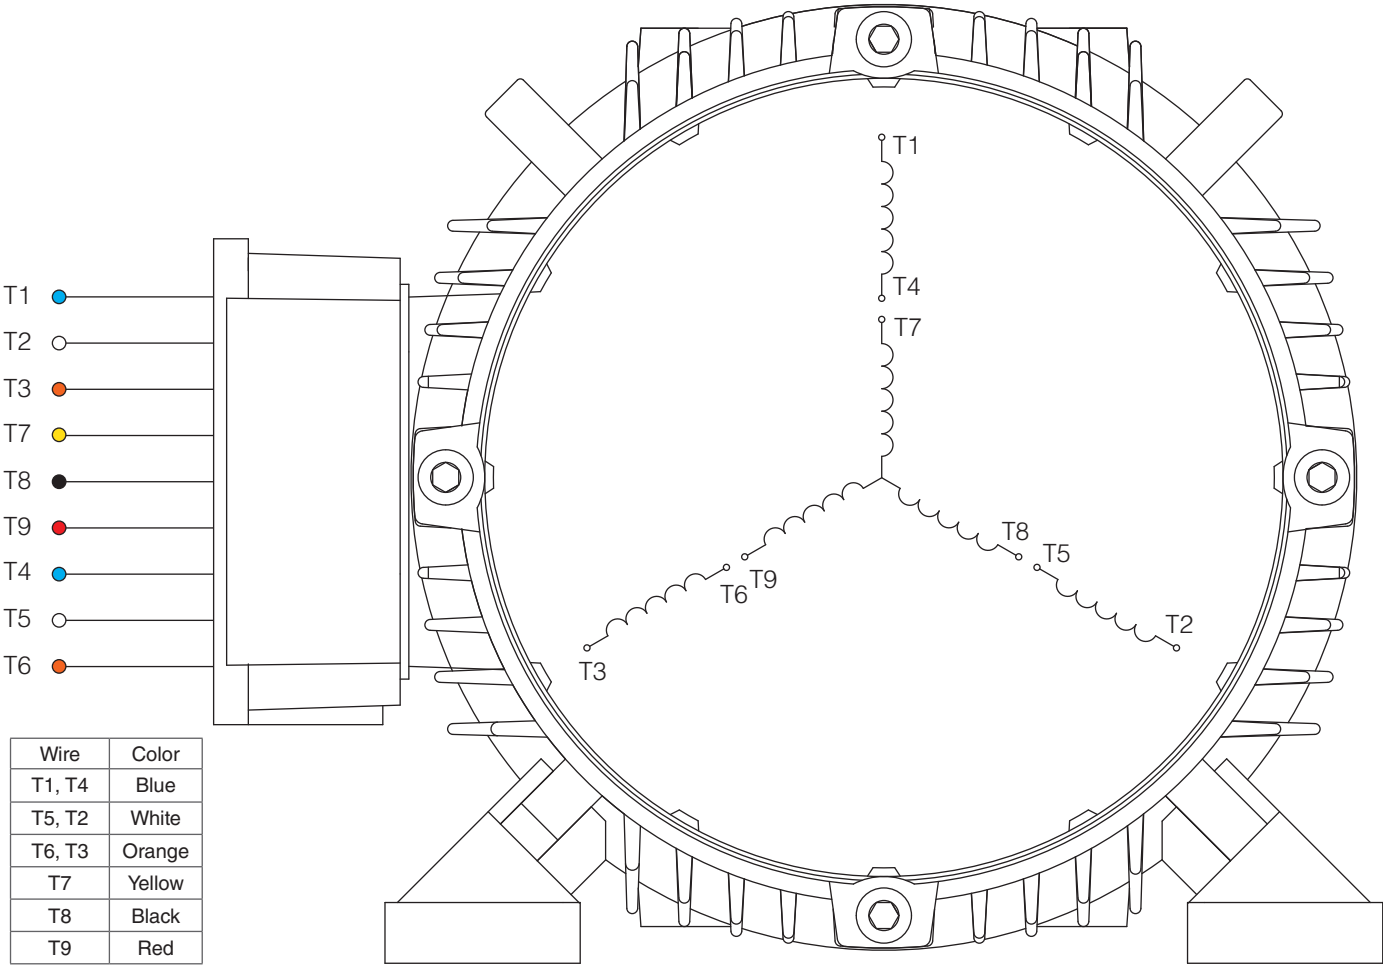

Wire	Color
T1, T4	Blue
T5, T2	White
T6, T3	Orange
T7	Yellow
T8	Black
T9	Red

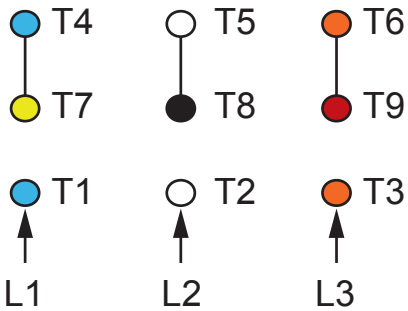

HIGH VOLTAGE
(Y)

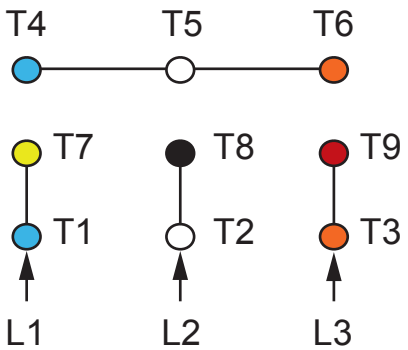

LOW VOLTAGE
(YY)

- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY



 TECHTOP <i>You can't top a Techtop.</i>		NEMA 3Ø YY/Y 9-Lead Dual Voltage	
DRAWING NUMBER:	NEMA-3-9-YY-Y	ISSUED DATE	08/09/25
CONNECTION:	YY/Y		
NUMBER OF LEADS:	9	PREMIUM JM-JP PUMP MOTORS	
THERMAL PROTECTION:	-		

NEMA 3Ø YY/Y 9-Lead Dual Voltage



 TECHTOP <i>You can't top a Techtop.</i>		NEMA Premium TEFC 215JP	
DRAWING NUMBER:	GR3-AL-TF-210JP	ISSUED DATE	08/09/25
DIMENSIONS:	Inches	PREMIUM JM-JP PUMP MOTORS	
MOUNTING:	Rigid/C-Flange		
CASING MATERIAL:	Cast Aluminum		