NEMA | **Model BMG0006D-TD**
MFG PN: T145T 1U6B

Model **BMG0006D-TD**
Product Data Package

MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
BMG0006D-TD	1	1145	230/460	3	60	145TD	Rigid/D-Flange	TEFC

Toronto
TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal
TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton
PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg
PHONE 204.633.2779
EMAIL infoWEST@techtopcanada.com

Calgary
PHONE 403.313.6363
EMAIL infoWEST@techtopcanada.com

Vancouver
PHONE 604.525.1551
EMAIL infoWEST@techtopcanada.com

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model BMG0006D-TD

MFG PN: T145T 1U6B

ELECTRICAL DATA		
Rated Motor Output Power	1	HP
	-	kW
Rated Motor Speed	1145	r/min 60Hz
	935	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	3.26/1.63	A (I_n) @ 60Hz
	3.80/1.90	A (I_n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	8.12	A (I_n) @ 60Hz
FI Current @ 208V	3.36	A (I_n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	H	60Hz
	G	50Hz
Nominal Efficiency	82.5	% @ 60Hz
Nominal Power Factor	0.7	cosΦ @ 60Hz
Leads (Qty, Size)	9	18
Connection	YY/Y	–
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	**RATIO**	**Hz**
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	-	°C @ 60Hz
	21	°C @ 50Hz

GENERAL DATA		
Frame Size	145TD	
Enclosure	TEFC	
Mounting	Rigid/D-Flange	
Approximate Weight (lbs.)	46.4 lbs.	
Casing Material / Fan Cover	Cast Aluminum	Steel
Shaft Material	1045	
NEMA Design	B	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6205 ZZ	
Bearing ODE Side	6205 ZZ	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	-	
Temperature Code	-	-

BRAKE DATA	VDC	VAC
Brake Volts / Rectifier Volts	205	230
Brake Model	REB04-010B-205-016	
Rectifier Model	RZL141-170H	

BRAKE TORQUE	
Rated Torque (ft.lb)	11.8
Rated Torque (Nm)	16

NEMA | Model BMG0006D-TD

MFG PN: T145T 1U6B

NAMEPLATE DATA	60Hz	50Hz
Horse Power	1	1
RPM	1145	935
Voltage	230/460	190/380
Full Load Amps	3.26/1.63	3.80/1.90
Service Factor	1.25	1
KVA Code	H	G
Full Load Amps (208V)	3.36	-
Nominal Efficiency	82.5	79.1
Nominal Power Factor	0.7	-
Design	B	
Frame	145TD	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6205 ZZ	
Opposite Drive End Bearing	6205 ZZ	
Weight (lbs)	46.4	

NAMEPLATE LAYOUT

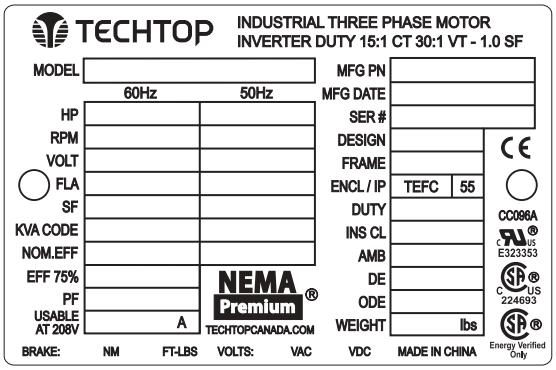

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada

DC BRAKE DATA		
Brake Torque (Nm / ft.lb)	16	11.8
Brake Volts (VDC / VAC)	205	230

Questions? **Call 1.888.286.1820**

NEMA | Model BMG0006D-TD

MFG PN: T145T 1U6B

Torque Speed (T-n) Curve

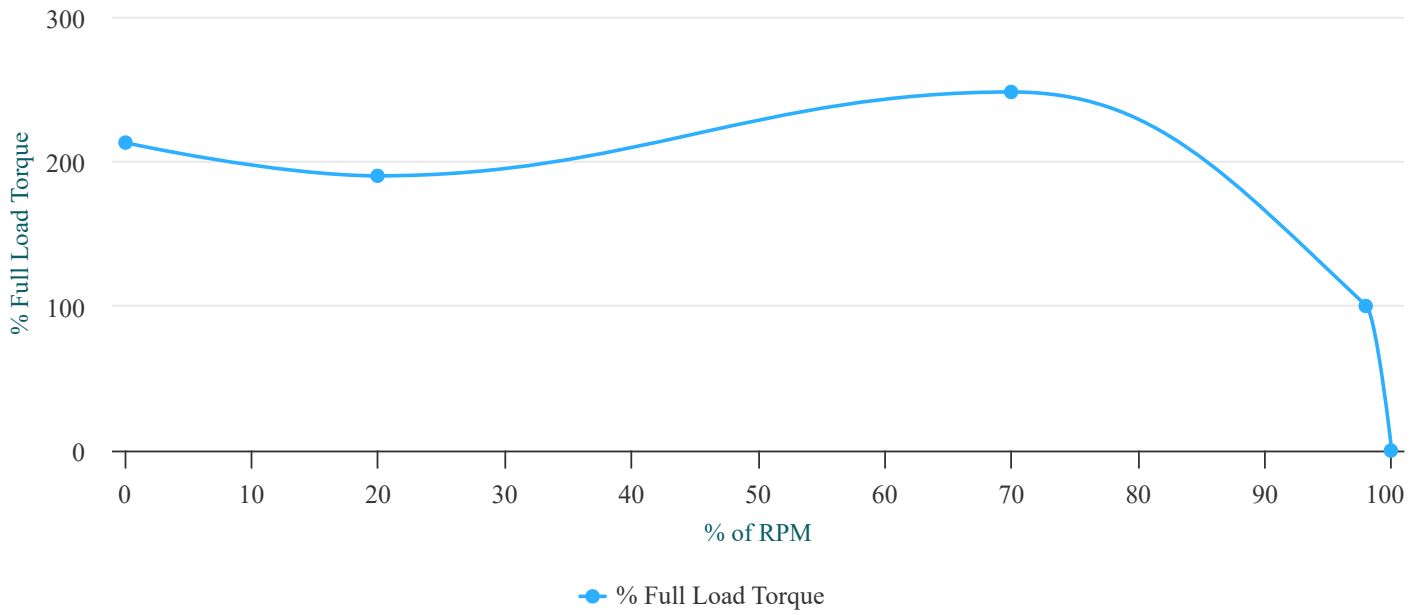

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz — **TYPICAL PERFORMANCE - NOT GUARANTEED VALUES**

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	9.8	213	Start Configuration	DOL
Pull-Up Torque	8.7	190	Starting Current (A)	8.12
Breakdown Torque	11.4	248	No-Load Current (A)	1
Full Load Torque	4.6	100	No-Load Power Factor	0.09

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	1.1	1.2	1.4	1.6	2.0	2.0
Efficiency (%)	70.9	80.3	82.6	82.4	80.8	80.8
Speed (r/min)	1189.0	1179.0	1167.0	1150.0	1136.0	1136.0
Power Factor (cosΦ)	0.31	0.49	0.62	0.70	0.75	0.75
Input Power (kW)	0.3	0.5	0.7	0.9	1.2	1.2

NEMA

Model BMG0006D-TD

MFG PN: T145T 1U6B

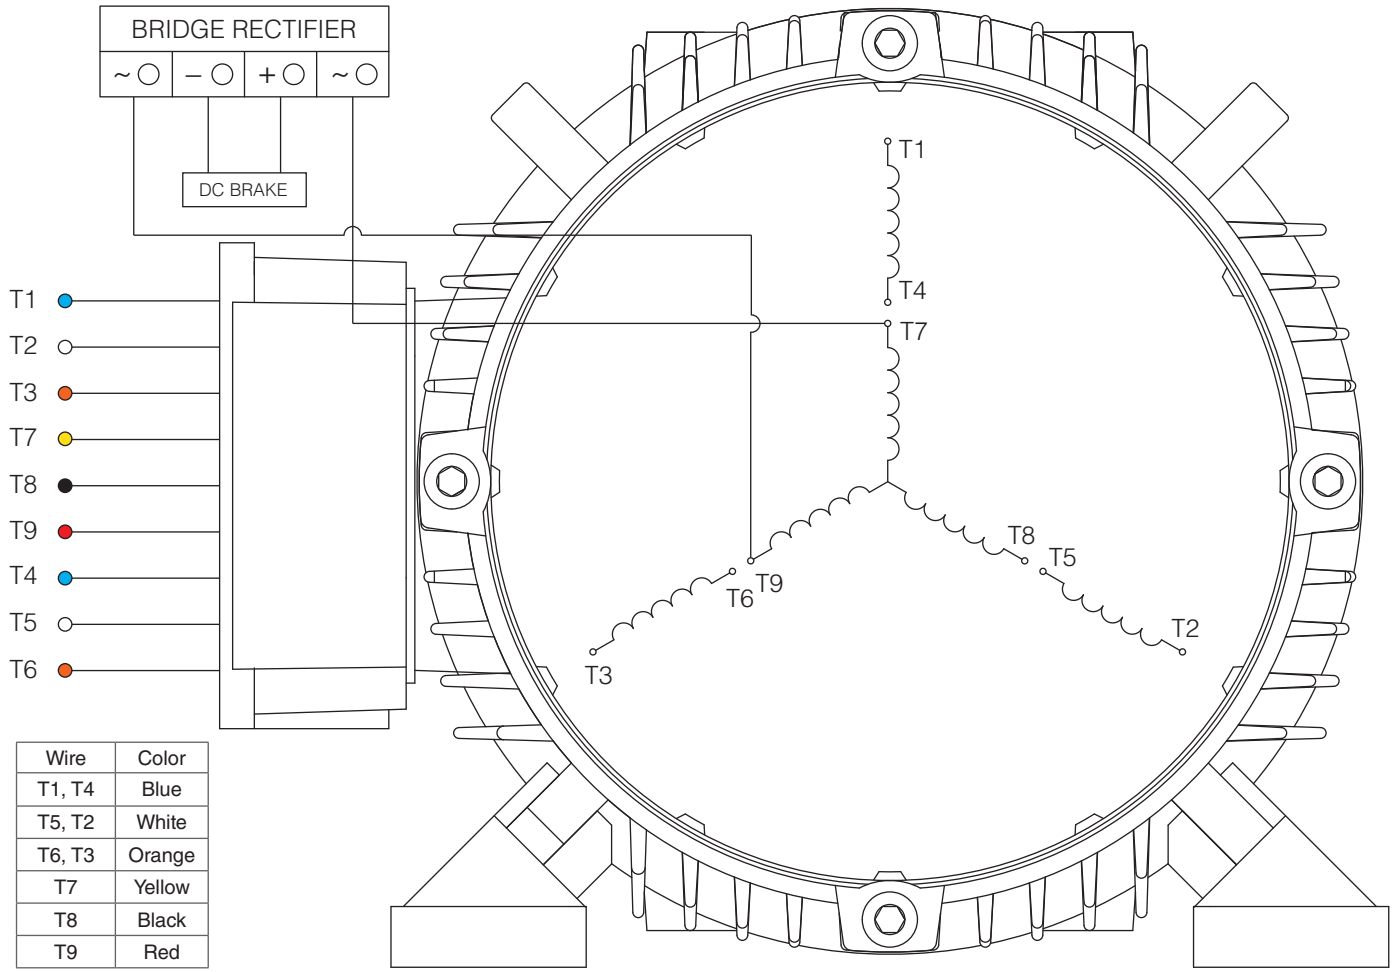

Wire	Color
T1, T4	Blue
T5, T2	White
T6, T3	Orange
T7	Yellow
T8	Black
T9	Red

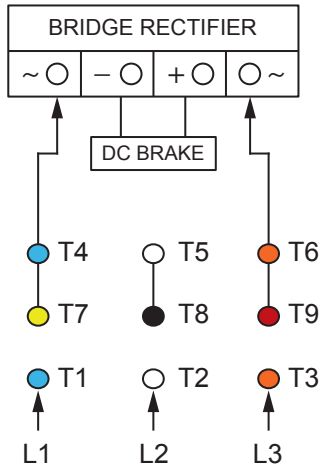

HIGH VOLTAGE

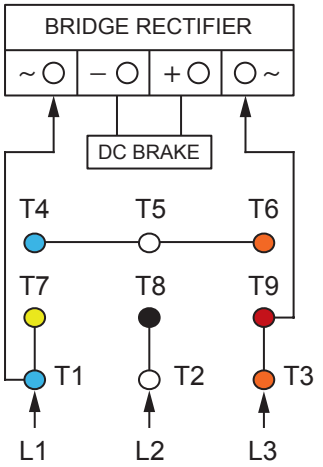

LOW VOLTAGE

NOTES:

1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH "*" EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
5. DIAGRAMS FOR REFERENCE ONLY

TECHTOP
You can't top a Techtop.

NEMA 3Ø YY/Y 9-Lead Dual Voltage

DRAWING NUMBER:	NEMA-3-9-YY-Y-BRK
CONNECTION:	YY/Y
NUMBER OF LEADS:	9
THERMAL PROTECTION:	Optional

ISSUED DATE	10/10/25

PREMIUM T-FRAME BRAKE MOTORS

NEMA

Model BMG0006D-TD

MFG PN: T145T 1U6B

TECHTOP
You can't top a Techtop.

NEMA Premium TEFC 145TD

DRAWING NUMBER:	GR3-AL-TF-140TD-BRK
DIMENSIONS:	Inches
MOUNTING:	Rigid/D-Flange
CASING MATERIAL:	Cast Aluminum

ISSUED DATE	10/10/25

PREMIUM T-FRAME BRAKE MOTORS