

NEMA

Model JMC0402FPS
MFG PN: T286T 402UB

Model JMC0402FPS

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
JMC0402FPS	40	3555	575	3	60	286JM	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton

PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg


PHONE 204.633.2779
EMAIL infoWEST@techtopcanada.com

Calgary

PHONE 403.313.6363
EMAIL infoWEST@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoWEST@techtopcanada.com

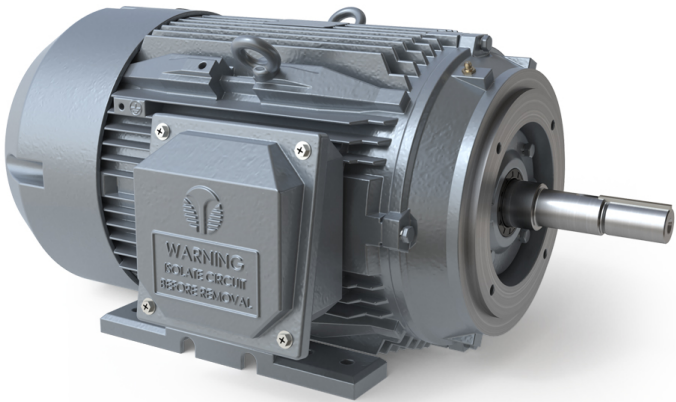

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA


Model JMC0402FPS
MFG PN: T286T 402UB

ELECTRICAL DATA		
Rated Motor Output Power	40	HP
	-	kW
Rated Motor Speed	3555	r/min 60Hz
	-	r/min 50Hz
Rated Motor Voltage (+/-10%)	575	V/60Hz
	-	V/50Hz
Rated Motor Current	36.40	A (I _n) @ 60Hz
	-	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	347.76	A (I _n) @ 60Hz
FI Current @ 208V	-	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	-	@ 50Hz
KVA Code	H	60Hz
	-	50Hz
Nominal Efficiency	92.4	% @ 60Hz
Nominal Power Factor	-	cosΦ @ 60Hz
Leads (Qty, Size)	6	12
Connection	D	-
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	1000:1	0.06 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	65.8	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	286JM	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	474 lbs.	
Casing Material / Fan Cover	Cast Iron	Cast Iron
Shaft Material	304 SS	
NEMA Design	A	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6311 C3	
Bearing ODE Side	6311 C3	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	T3A	-

Questions? Call 1.888.286.1820

Model JMC0402FPS
MFG PN: T286T 402UB

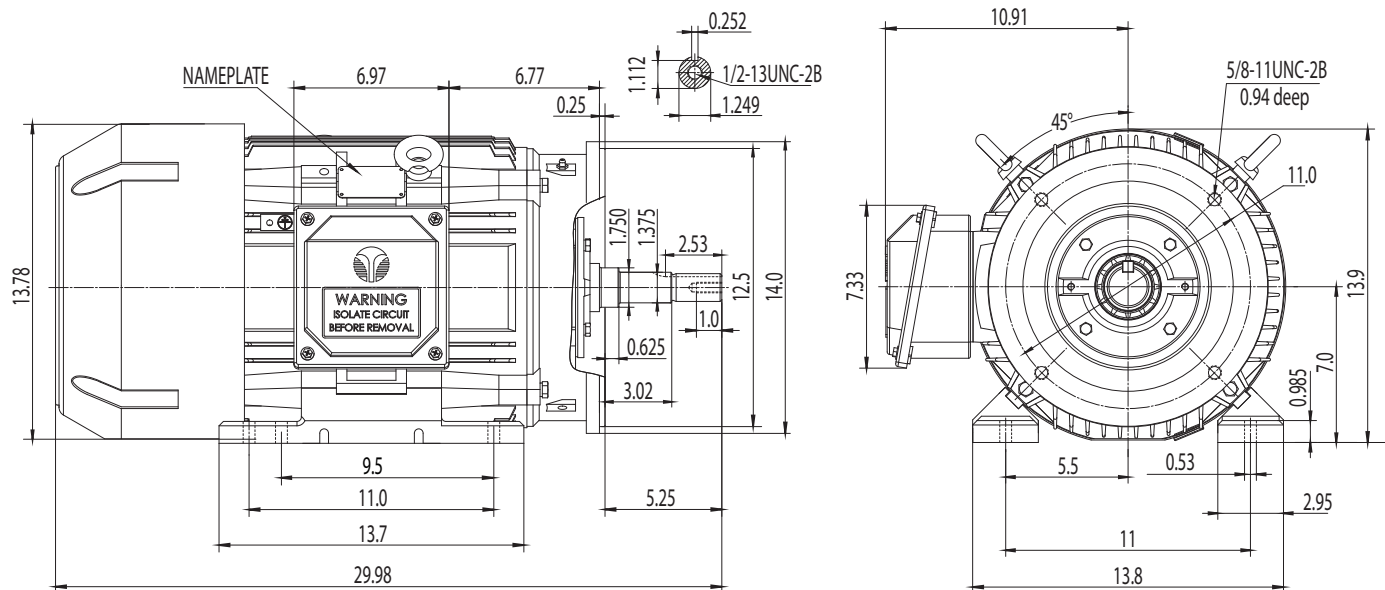

NAMEPLATE DATA	60Hz	50Hz
Horse Power	40	-
RPM	3555	-
Voltage	575	-
Full Load Amps	36.40	-
Service Factor	1.25	-
KVA Code	H	-
Full Load Amps (208V)	-	-
Nominal Efficiency	92.4	-
Nominal Power Factor	-	-
Design	A	
Frame	286JM	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6311 C3	
Opposite Drive End Bearing	6311 C3	
Weight (lbs)	474	

NAMEPLATE LAYOUT

 TECHTOP		INDUSTRIAL THREE PHASE PUMP MOTOR INVERTER DUTY 1000:1 VT - 1.0 SF	
MODEL		TECHTOPCANADA.COM	
NEMA Premium ®	60Hz	50Hz	MFG PN
	HP		MFG DATE
	RPM		SER #
	VOLT		DESIGN
	FLA		FRAME
	SF		ENCL
	KVA CODE		IP
	NOM.EFF		DUTY
BEARING SIZE		INS CL	
DE	ODE	AMB	CC096A
GREASE: MOBIL POLYREX EM		WEIGHT	
MADE IN CHINA		lbs	
CLASS 1, DIV 2, GROUPS A, B, C AND D		IEEE 45 MARINE DUTY	

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	1000:1	0.06 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	CSA CERTIFIED
Class / Division	Class I, Div. 2
Groups	A, B, C & D

Questions? Call 1.888.286.1820

NEMA

Model JMC0402FPS
MFG PN: T286T 402UB

Torque Speed (T-n) Curve

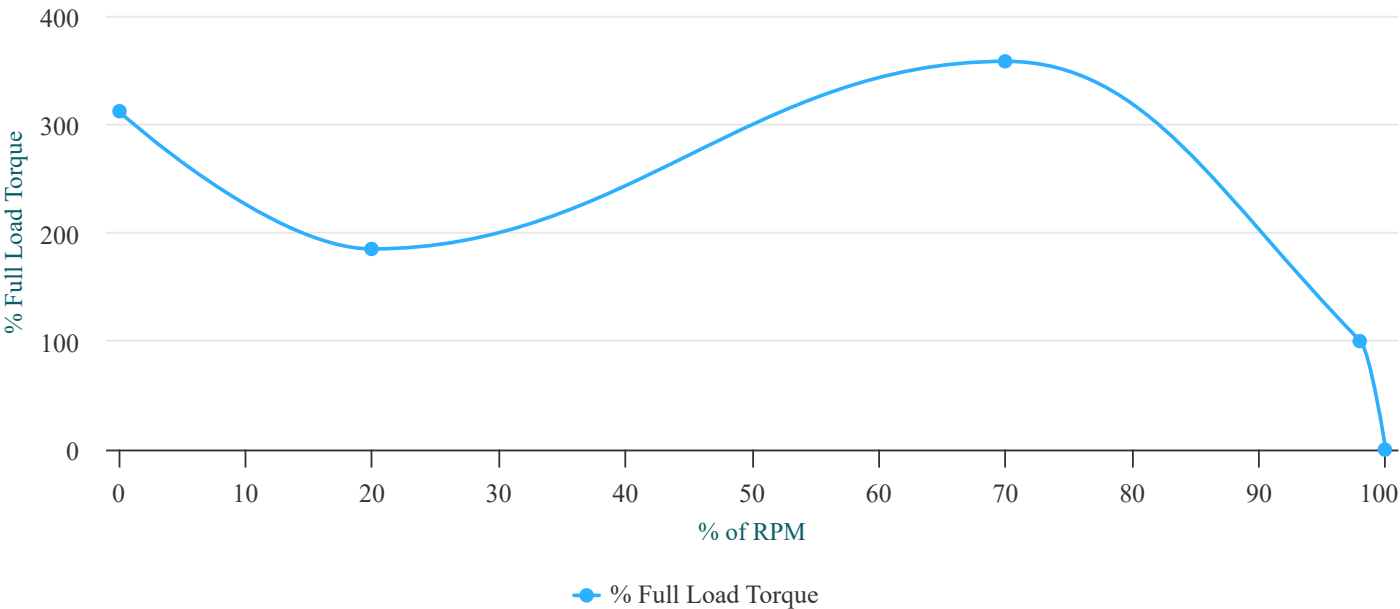

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	184.4	312	Start Configuration	DOL
Pull-Up Torque	109.3	185	Starting Current (A)	347.76
Breakdown Torque	211.6	358	No-Load Current (A)	12.6
Full Load Torque	59.1	100	No-Load Power Factor	-



TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	15.1	21.4	28.7	36.9	45.6	45.6
Efficiency (%)	87.2	91.7	92.6	92.5	92.0	92.0
Speed (r/min)	3589.0	3578.0	3566.0	3553.0	3539.0	3539.0
Power Factor (cosΦ)	0.57	0.77	0.85	0.88	0.90	0.90
Input Power (kW)	8.6	16.4	24.3	32.4	40.8	40.8

Questions? Call **1.888.286.1820**



Model JMC0402FPS
MFG PN: T286T 402UB

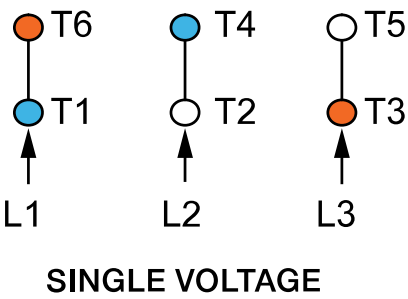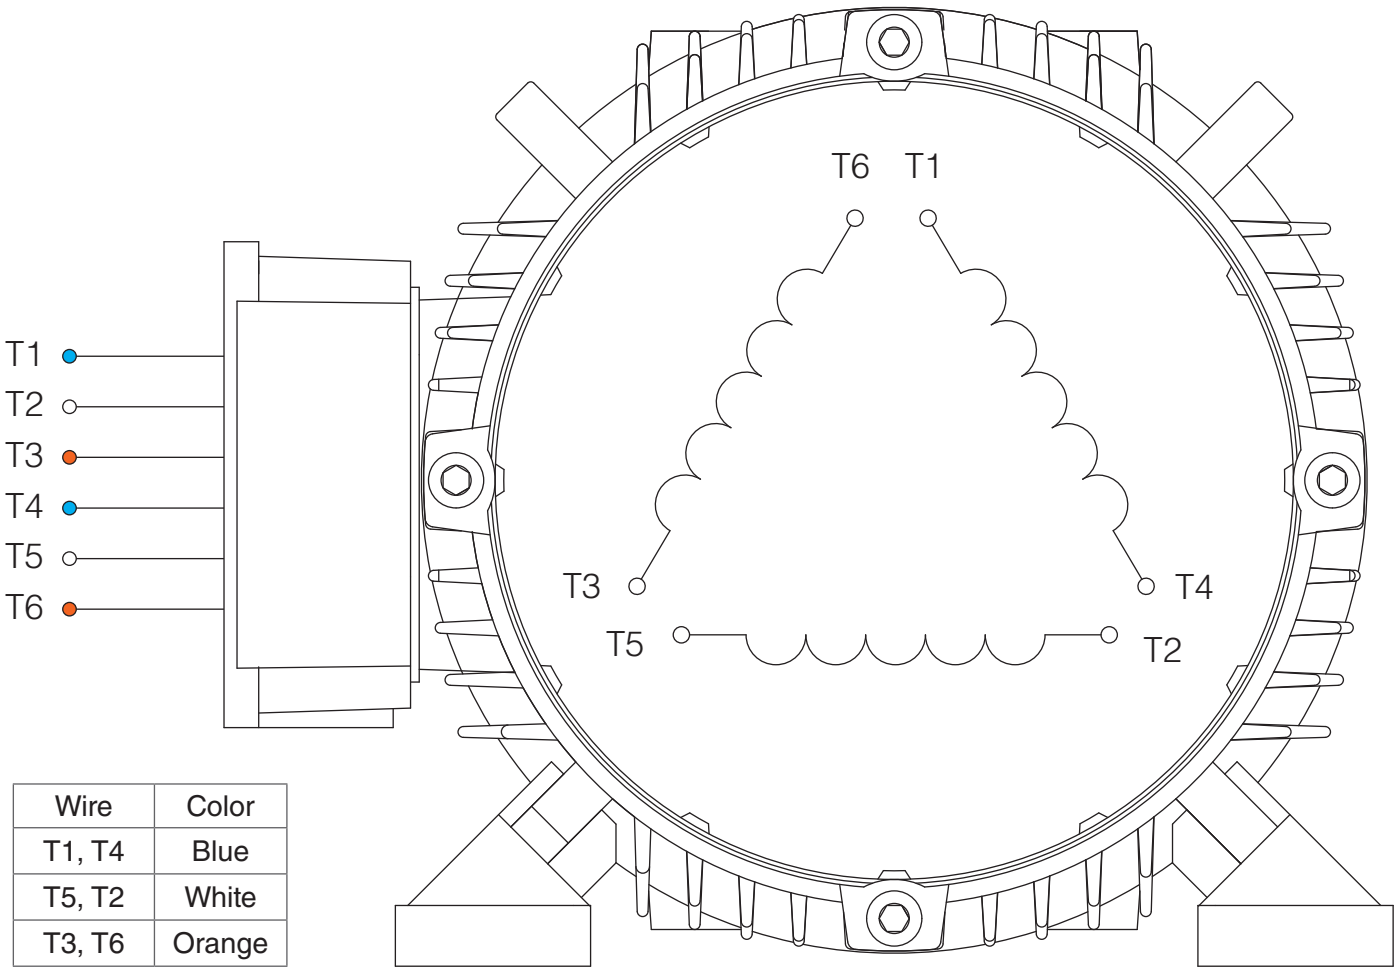



- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY



DRAWING NUMBER:	NEMA-3-6-D
CONNECTION:	D
NUMBER OF LEADS:	6
THERMAL PROTECTION:	-

NEMA 3Ø D 6-Lead Single Voltage

ISSUED DATE	31/10/25
PREMIUM JM-JP PUMP MOTORS	

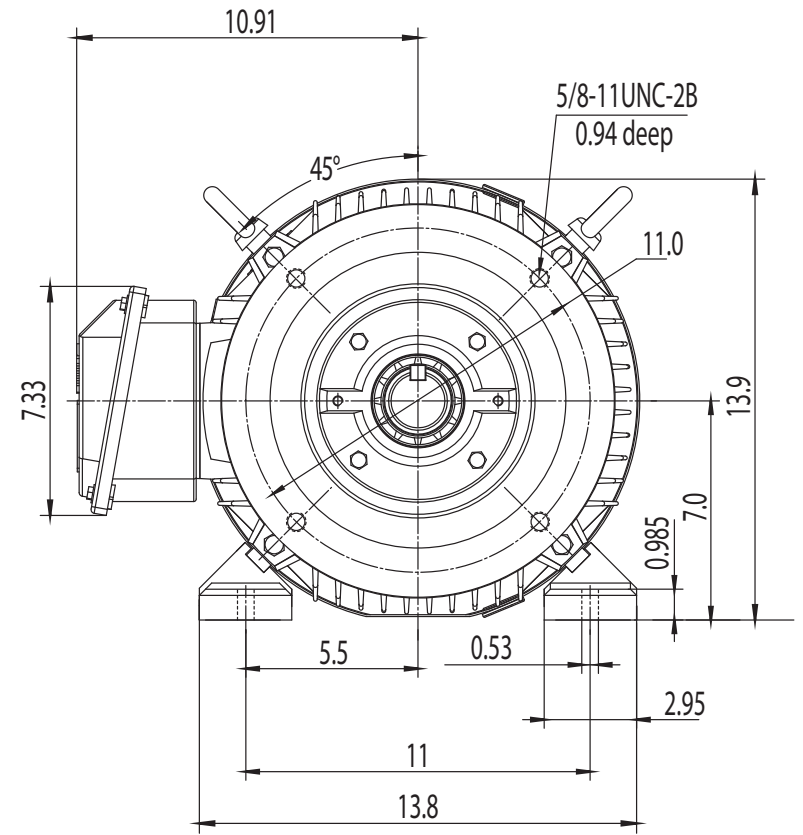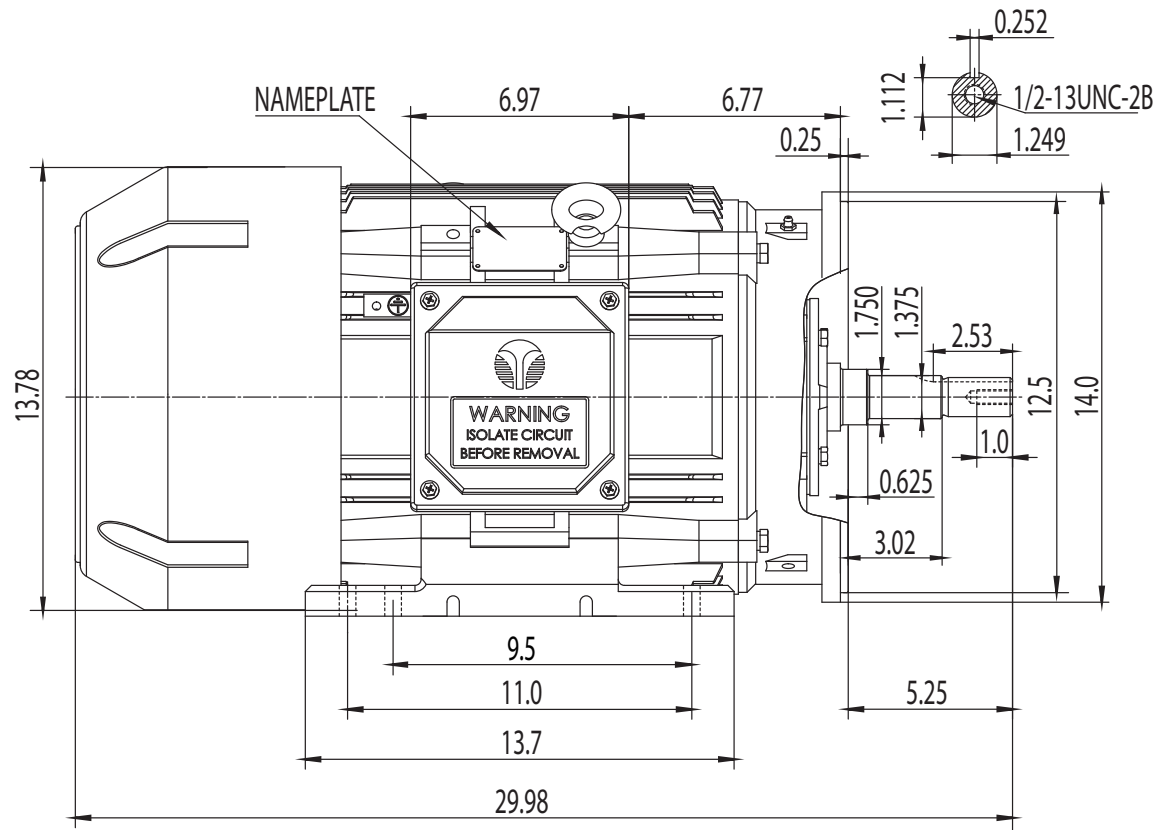

NEMA Premium TEFC 286JM

DRAWING NUMBER:

GR3-CI-TF-286JM-CFC

DIMENSIONS:

Inches

MOUNTING:

Rigid/C-Flange

CASING MATERIAL:

Cast Iron

ISSUED DATE

31/10/25

PREMIUM JM-JP PUMP MOTORS