

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11535533

Frame	: 254/6TC	Locked rotor time	: 32s (cold) 18s (hot)
Output	: 20 HP (15 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 575 V	Ambient temperature	: -20°C to +40°C
Poles	: 4	Altitude	: 1000 m.a.s.l.
Rated current	: 19.3 A	Protection degree	: IP55
	: 6.5x(Code G)	Cooling method	: IC411 - TEFC
Rated speed	: 1770 rpm	Mounting	: F-1
Rated torque	: 8.20 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 64.0 dB(A)
Service factor	: 1.25	Starting method	: Direct On Line
Moment of inertia (J)	: 0.1305 kgm ²	Approx. weight ³	: 145 kg
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	91.7	92.4	93.0	Max. traction	: 263 kgf
Power Factor	0.68	0.79	0.84	Max. compression	: 408 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
7.5	6.5	6.0	3.5	2.5	1.6	1.2

	Drive end	Non drive end
Bearing type	: 6309 C3	6209 C3
Sealing	: V'Ring	V'Ring
Lubrication interval	: 20000 h	20000 h
Lubricant amount	: 13 g	9 g
Lubricant type	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	14/06/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage





Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11535533

LOAD PERFORMANCE CURVE

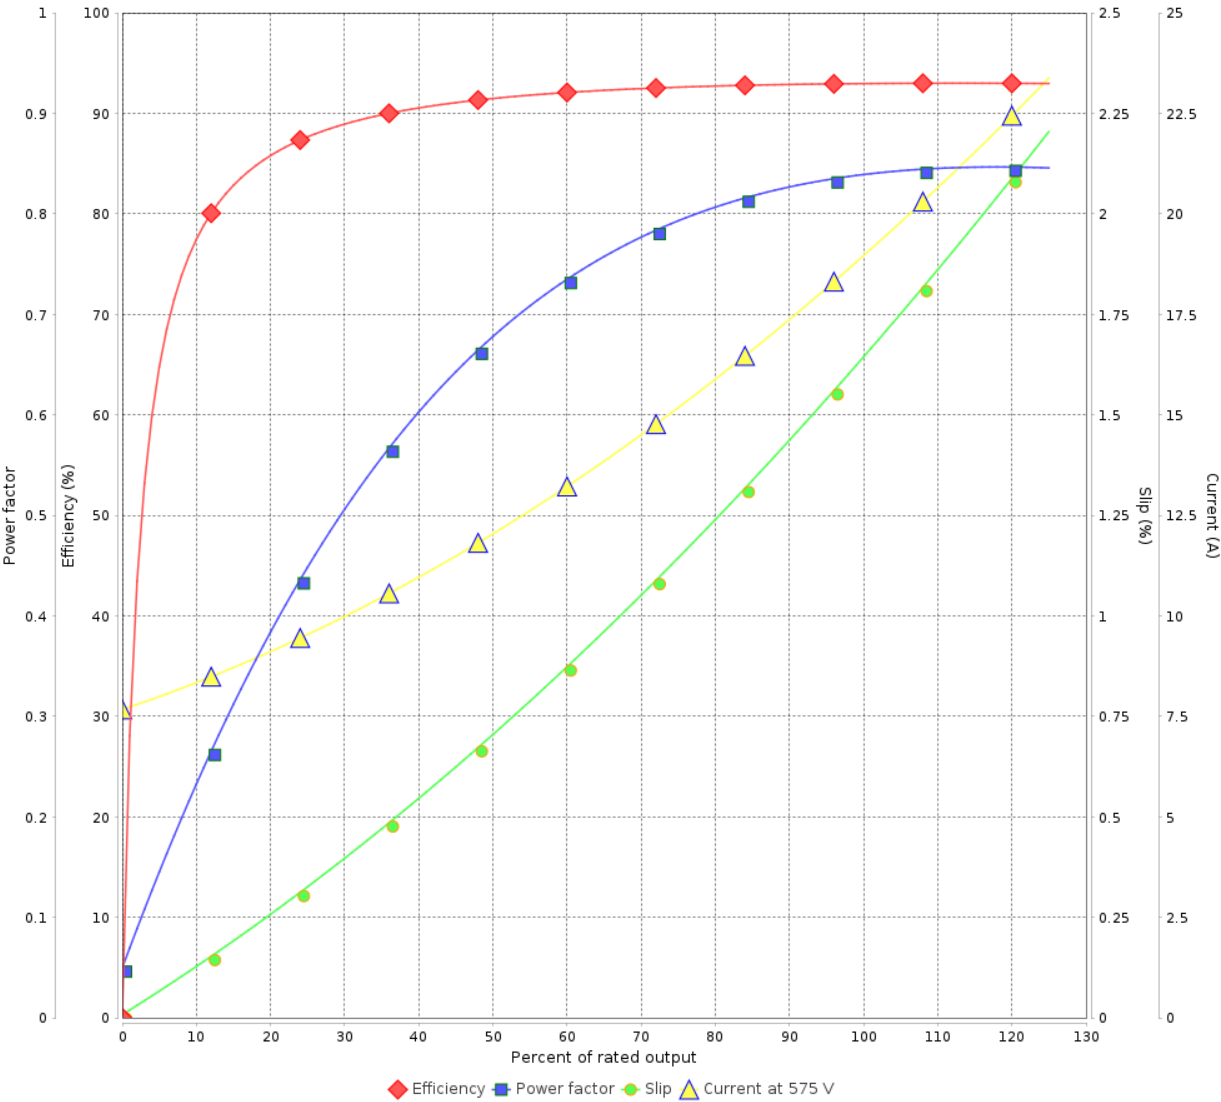

Rev.	Changes Summary		Performed	Checked	Date
Performed by		Page 2 / 2 Revision			
Checked by					
Date	14/06/2026				

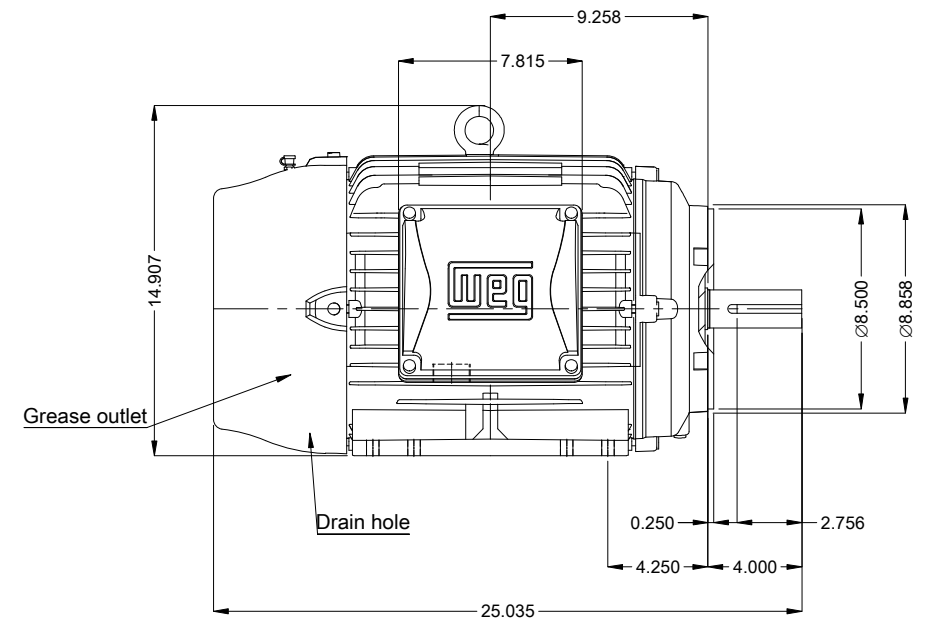

20 HP 04 Poles 60 Hz										A
						Scale 1 : 8				
						HYBRISUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22 NEMA PREM. EFF. FRAME 254/6TC IP55 TEFC				PREVIEW WDD 00			
CHECKED										
RELEASED										
REL. DATE										
						SHEET		1 / 1		