

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 13610460
Catalog # : HT025508NPW22

Frame	: 324/6T	Locked rotor time	: 41s (cold) 23s (hot)
Output	: 25 HP (18.5 kW)	Temperature rise	: 80 K
Poles	: 8	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 28.7 A	Protection degree	: IP55
L. R. Amperes	: 149 A	Cooling method	: IC411 - TEFC
LRC	: 5.2x(Code G)	Mounting	: F-1
No load current	: 16.0 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 880 rpm	Noise level ²	: 56.0 dB(A)
Slip	: 2.22 %	Starting method	: Direct On Line
Rated torque	: 149 ft.lb	Approx. weight ³	: 509 lb
Locked rotor torque	: 200 %		
Breakdown torque	: 229 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 11.9 sq.ft.lb		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	89.5	91.0	91.0	Max. traction	: 1041 lb
Power Factor	0.51	0.64	0.71	Max. compression	: 1593 lb

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
9.5	7.4	6.5	5.8	3.9	3.1	2.2

	Drive end	Non drive end
Bearing type	: 6312 C3	: 6212 C3
Sealing	: V'Ring	: V'Ring
Lubrication interval	: 20000 h	: 20000 h
Lubricant amount	: 21 g	: 13 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	30/07/2026			
		Page		Revision
		1 / 6		

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 13610460

Catalog # : HT025508NPW22

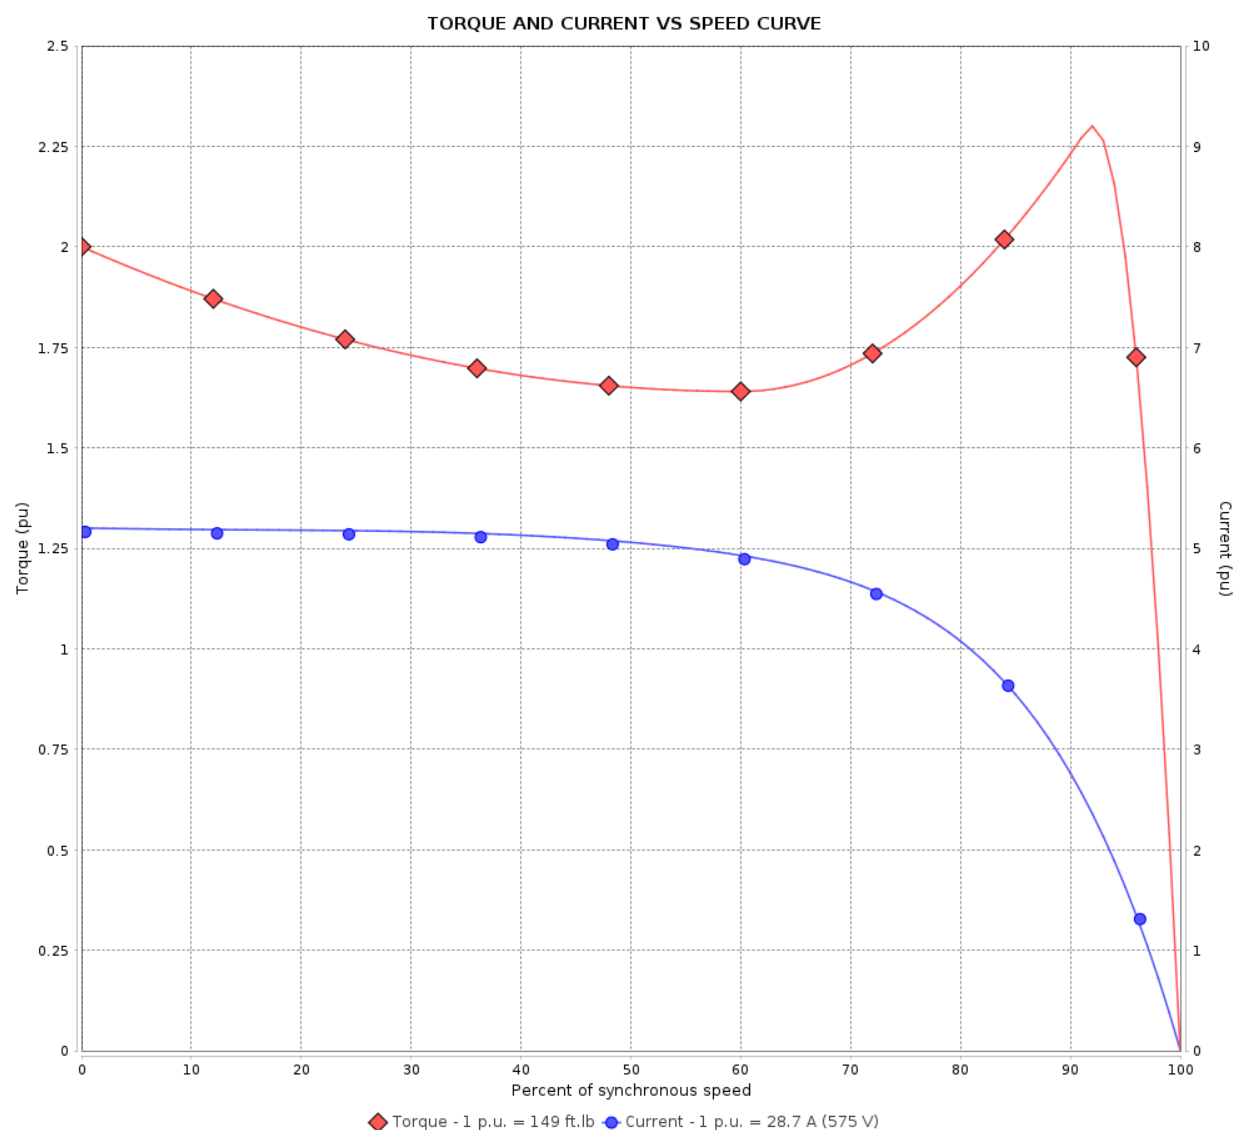

Performance : 575 V 60 Hz 8P

Rated current : 28.7 A
LRC : 5.2
Rated torque : 149 ft.lb
Locked rotor torque : 200 %
Breakdown torque : 229 %
Rated speed : 880 rpm

Moment of inertia (J) : 11.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Locked rotor time : 41s (cold) 23s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			2 / 6	
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 13610460

Catalog # : HT025508NPW22

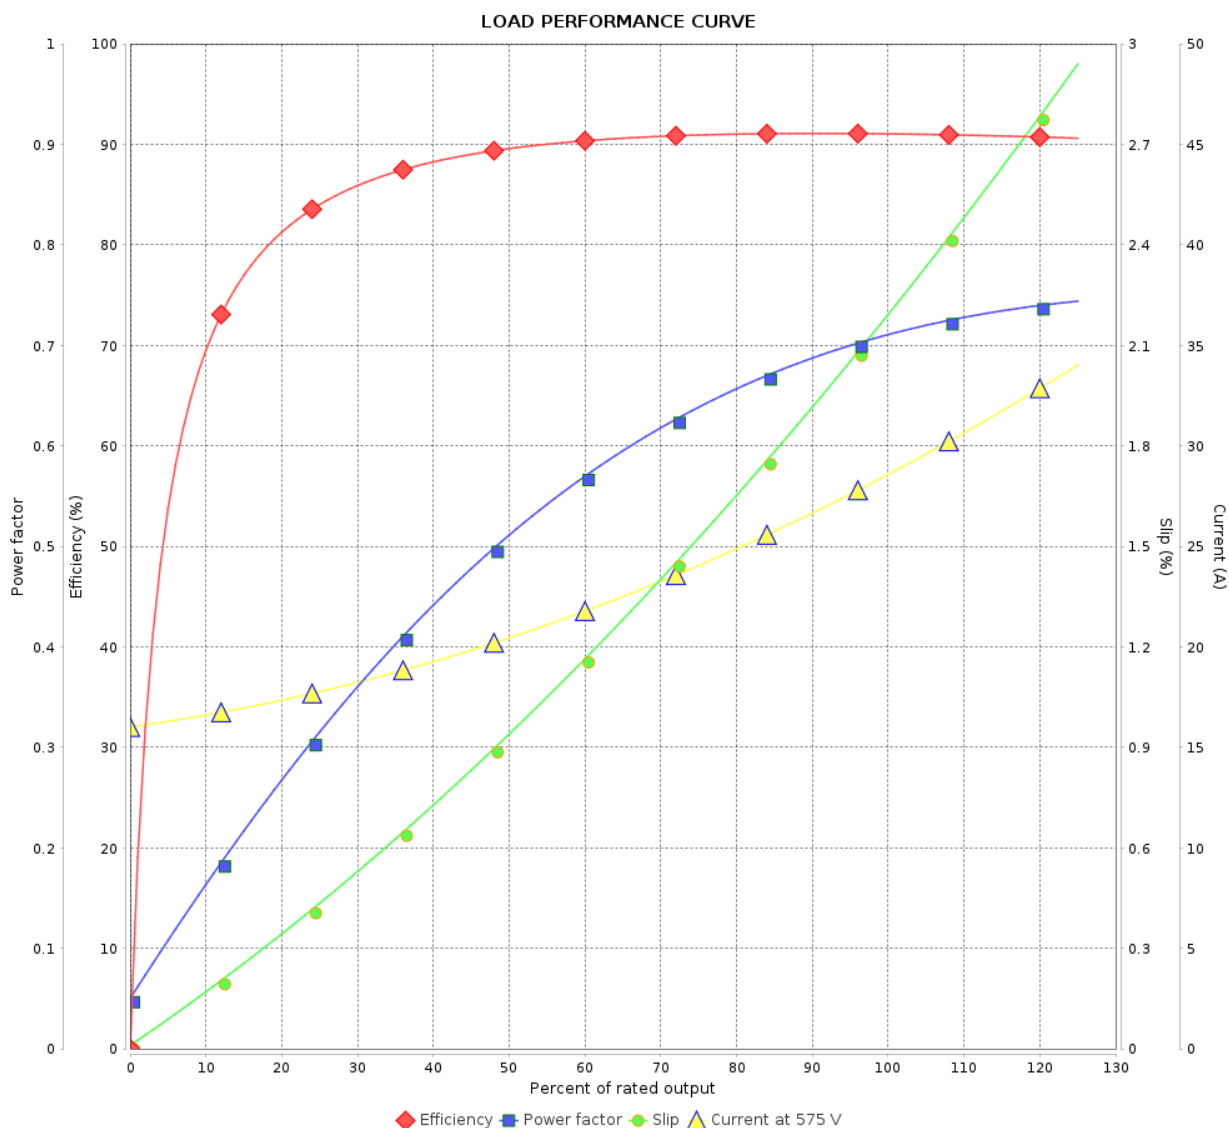

Performance : 575 V 60 Hz 8P

Rated current : 28.7 A
LRC : 5.2
Rated torque : 149 ft.lb
Locked rotor torque : 200 %
Breakdown torque : 229 %
Rated speed : 880 rpm

Moment of inertia (J) : 11.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 6Revision		
Checked by				
Date	30/07/2026			

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 13610460

Catalog # : HT025508NPW22

Performance : 575 V 60 Hz 8P

Rated current	: 28.7 A	Moment of inertia (J)	: 11.9 sq.ft.lb
LRC	: 5.2	Duty cycle	: Cont.(S1)
Rated torque	: 149 ft.lb	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.25
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 880 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 6	
Date	30/07/2026				

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

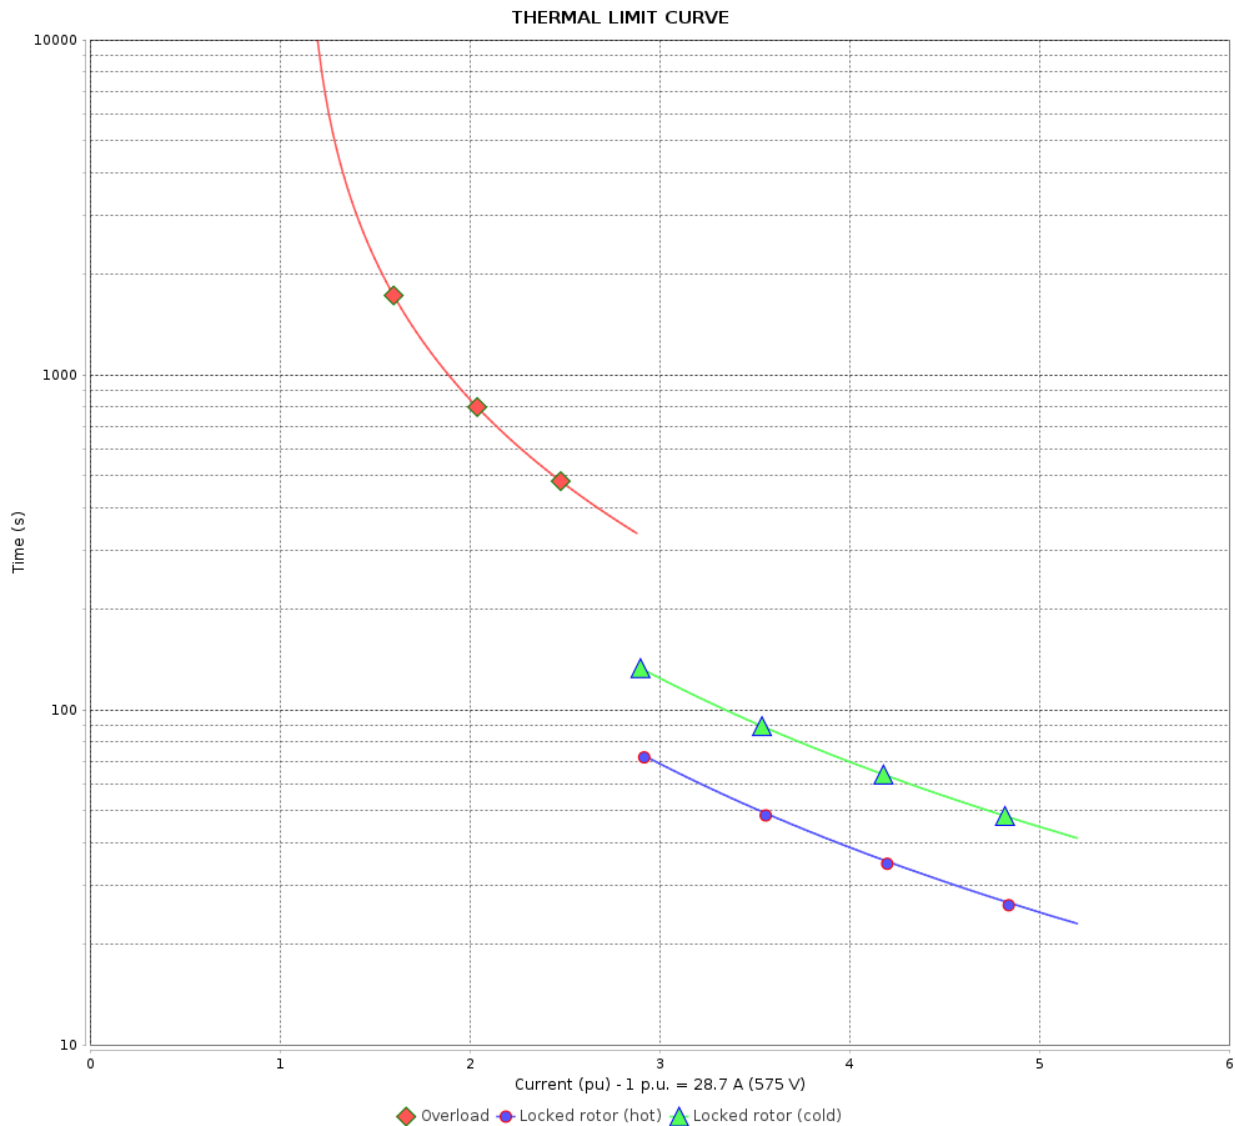

Rev.	Changes Summary		Performed	Checked	Date
Performed by					Page 5 / 6
Checked by					
Date	30/07/2026				
		Revision			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 13610460

Catalog # : HT025508NPW22



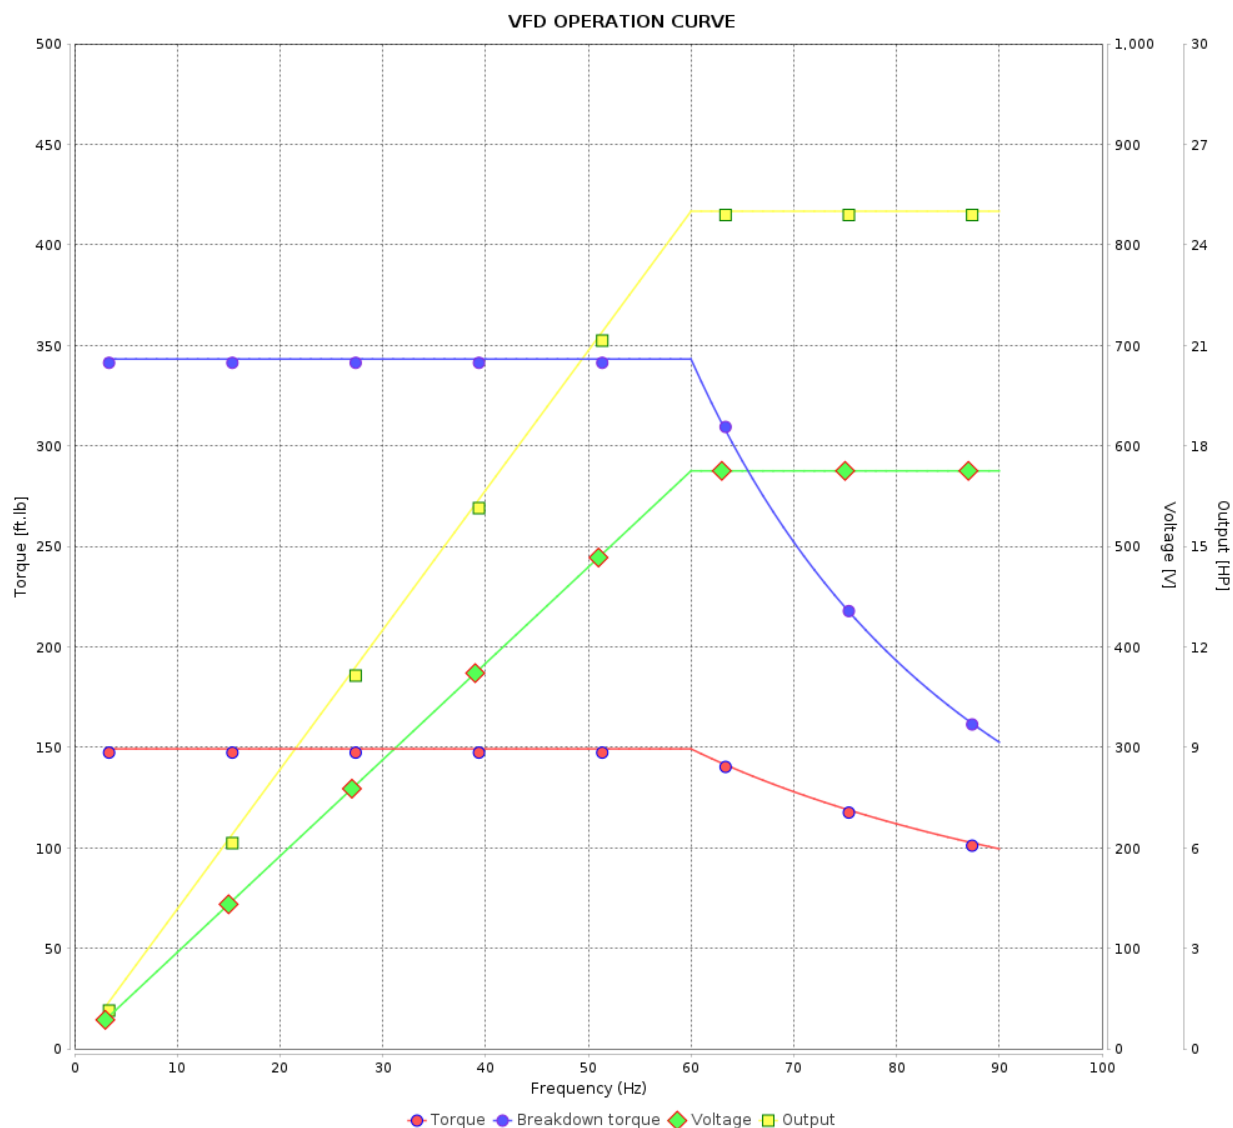


Performance : 575 V 60 Hz 8P

Rated current : 28.7 A
LRC : 5.2
Rated torque : 149 ft.lb
Locked rotor torque : 200 %
Breakdown torque : 229 %
Rated speed : 880 rpm

Moment of inertia (J) : 11.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				6 / 6	
Date					

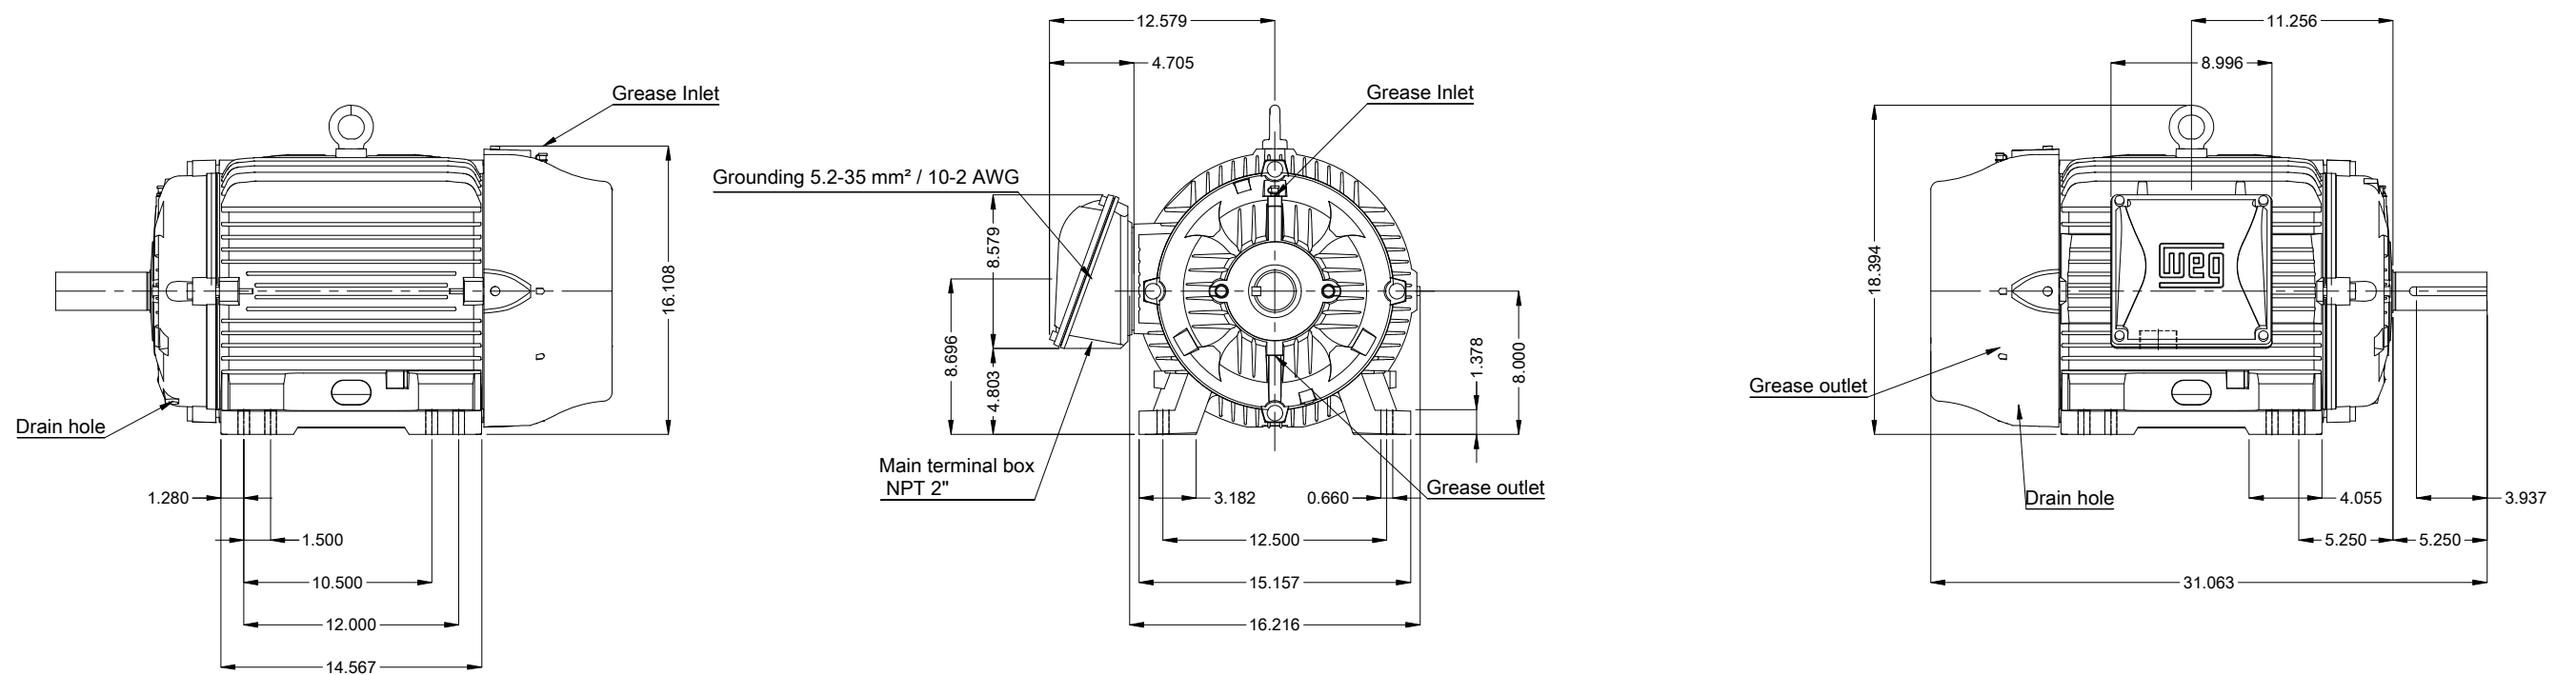

Without vertical jackscrews

Color RAL 5009

Painting plan 203A

Mounting NEMA F-1

Mounting B3R(D)

25 HP 08 Poles 60 Hz

Dimensions in inches

Scale 1 : 10

HYBRISUSER

--	--

	00
--	----

0

ECM

LOC

SUMMARY OF MODIFICATIONS

EXECUTED


CHECKED

RELEASED

DATE	VER
------	-----

EXECUTED

HYBRISUSER



THREE PH. MOTOR W22 NEMA PREM. EFF.

FRAME 324/6T IP55 TEFC

PREVIEW

WDD

00



	SHEET
--	-------

1	/	1
---	---	---