

NEMA

Model **BLA.752F-C**
MFG PN: T563/4U2B-5

Model **BLA.752F-C**

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
BLA.752F-C	0.75	3470	575	3	60	56C	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techtopcanada.com

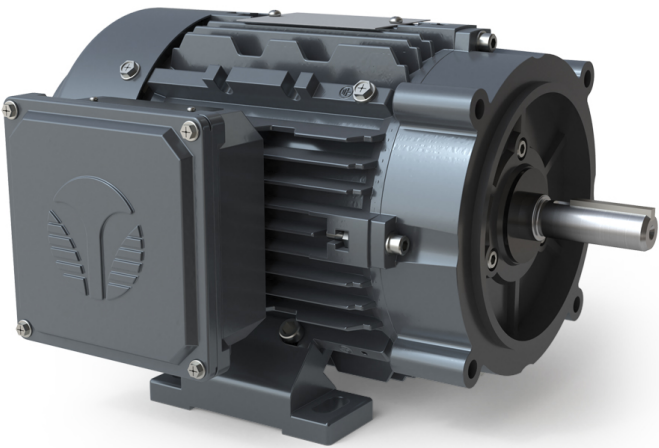

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA


Model BLA.752F-C
MFG PN: T563/4U2B-5

ELECTRICAL DATA		
Rated Motor Output Power	0.75	HP
	-	kW
Rated Motor Speed	3470	r/min 60Hz
	-	r/min 50Hz
Rated Motor Voltage (+/-10%)	575	V/60Hz
	-	V/50Hz
Rated Motor Current	1.00	A (I _n) @ 60Hz
	-	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	12.23	A (I _n) @ 60Hz
FI Current @ 208V	-	A (I _n) @ 60Hz
Service Factor	1.15	@ 60Hz
	-	@ 50Hz
KVA Code	K	60Hz
	-	50Hz
Nominal Efficiency	70	% @ 60Hz
Nominal Power Factor	0.77	cosΦ @ 60Hz
Leads (Qty, Size)	3	18
Connection	Y	-
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	10:1	6 - 60
Constant Torque	4:1	15 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	-	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	56C	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	19 lbs.	
Casing Material / Fan Cover	Cast Aluminum	Steel
Shaft Material	1045	
NEMA Design	B	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	NO
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6204 ZZ	
Bearing ODE Side	6204 ZZ	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	-	-

Questions? Call 1.888.286.1820

MFG PN: T563/4U2B-5

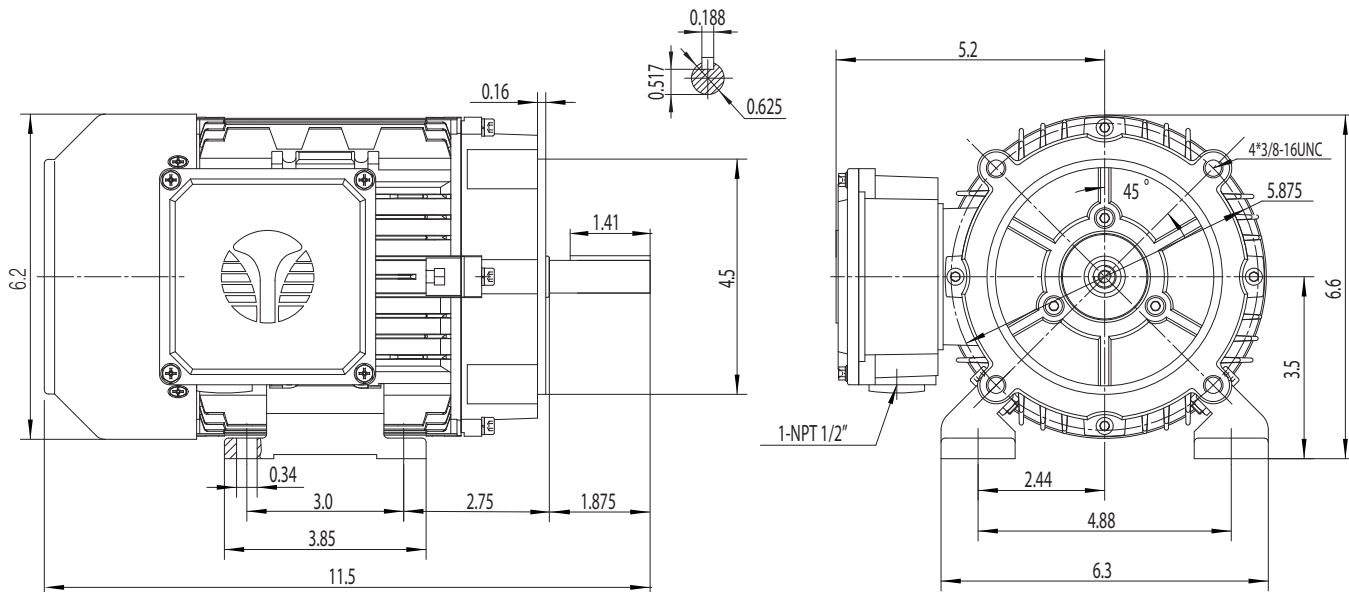

NAMEPLATE DATA	60Hz	50Hz
Horse Power	0.75	0.75
RPM	3470	-
Voltage	575	-
Full Load Amps	1.00	-
Service Factor	1.15	-
KVA Code	K	-
Full Load Amps (208V)	-	-
Nominal Efficiency	70	-
Nominal Power Factor	0.77	-
Design	B	
Frame	56C	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6204 ZZ	
Opposite Drive End Bearing	6204 ZZ	
Weight (lbs)	19	

NAMEPLATE LAYOUT



TECHTOP

Date of Mfg:

EPAct Rated - Industrial Three Phase Motor
SER No.

Model: _____ **MFG PN:** _____

Frame: **HP:** **RPM:** **SF:**

Voltage: **HZ:** **FLA:**

KVA Code: **PF:** **Eff:** **Nom.** **% 3/4** **%**

Design: **Ins. Class:** **F** **AMB:** **IP:**

FLA when operated at 288V: **Duty:** **Cont.**

Bearings: **DE** **ZZ** **ODE** **ZZ**

Class 1, Div 2, Groups A, B, C and D Compliant

TechttopCanada.com



US
C 224693



Made in China

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	10:1	6 - 60
Constant Torque	4:1	15 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	COMPLIANT ONLY
Class / Division	Class I, Div. 2
Groups	A, B, C & D

Questions? Call 1.888.286.1820

NEMA

Model BLA.752F-C
MFG PN: T563/4U2B-5

Torque Speed (T-n) Curve

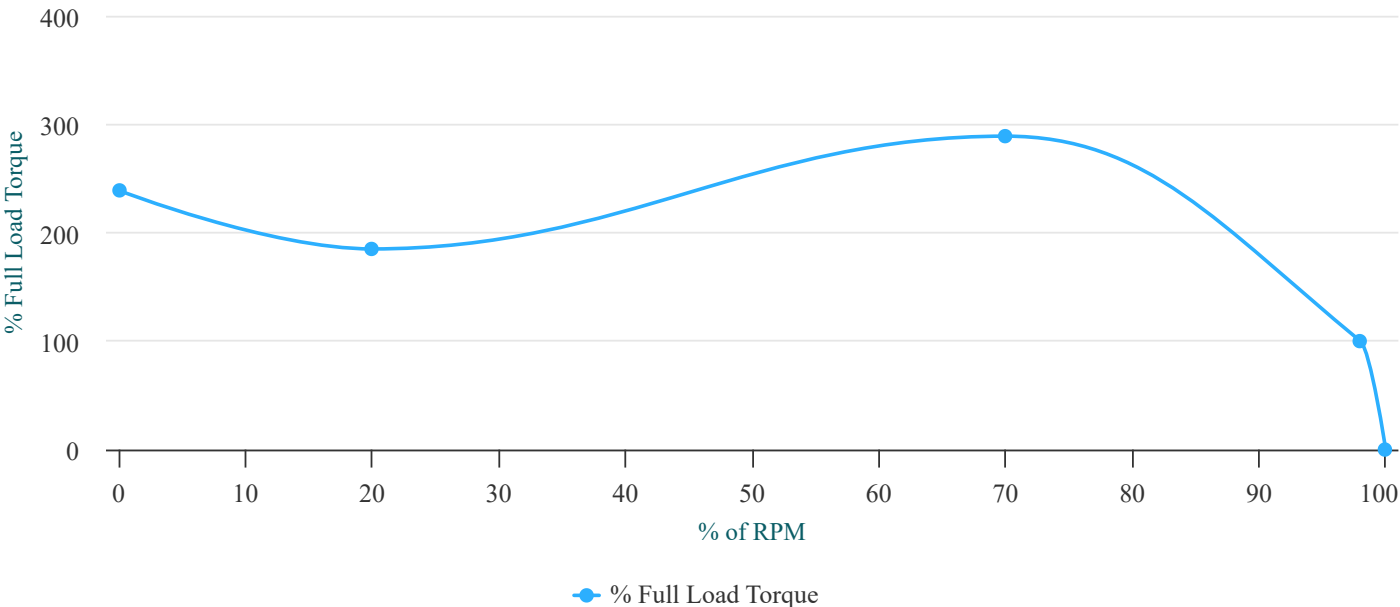

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)
Locked Rotor Torque	2.7	239
Pull-Up Torque	2.1	185
Breakdown Torque	3.3	289
Full Load Torque	1.1	100

TYPICAL PERFORMANCE - NOT GUARANTEED VALUES


PERFORMANCE VALUES	
Start Configuration	DOL
Starting Current (A)	12.23
No-Load Current (A)	-
No-Load Power Factor	-

% OF RATED LOAD	25	50	75	100	125	S.F. 1.15
Line Amperes (A)	-	-	-	2	-	-
Efficiency (%)	-	-	-	-	-	-
Speed (r/min)	-	-	-	-	-	-
Power Factor (cosΦ)	-	-	-	-	-	-
Input Power (kW)	-	-	-	-	-	-


Questions? Call 1.888.286.1820



Model **BLA.752F-C**
MFG PN: T563/4U2B-5

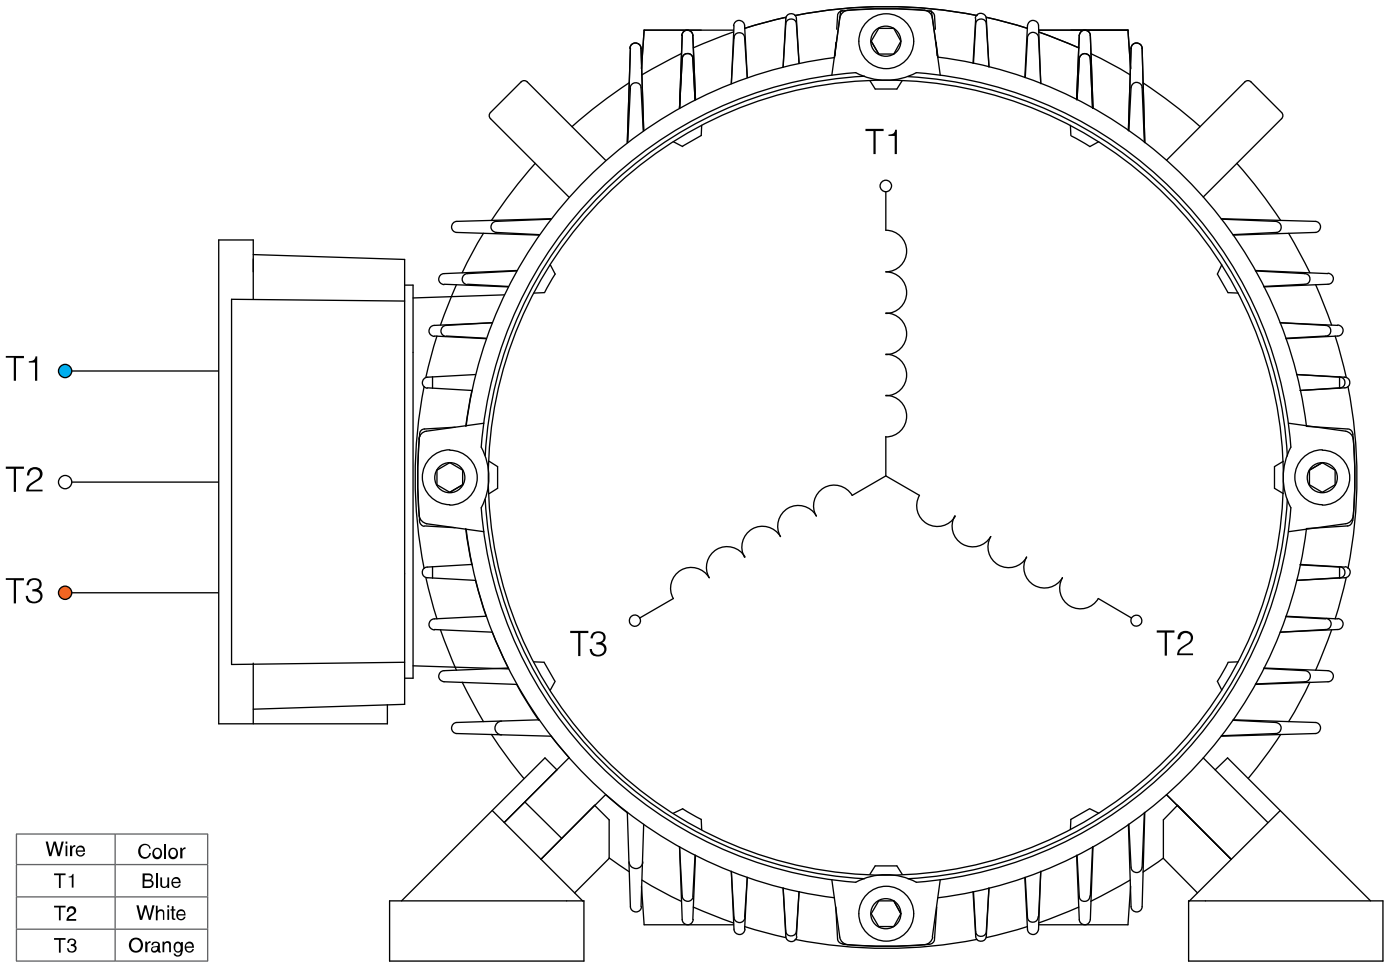

Wire	Color
T1	Blue
T2	White
T3	Orange

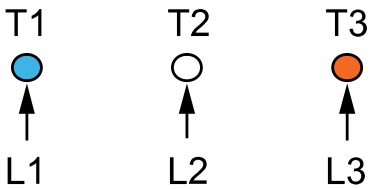


SINGLE VOLTAGE

- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY



 TECHTOP You can't top a Techtop.		NEMA 3Ø Y 3-Lead Single Voltage	
DRAWING NUMBER:	NEMA-3-3-Y	ISSUED DATE	06/03/25
CONNECTION:	Y		
NUMBER OF LEADS:	3		
THERMAL PROTECTION:	-	PREMIUM 56C ALUMINUM MOTORS	

NEMA 3Ø Y 3-Lead Single Voltage

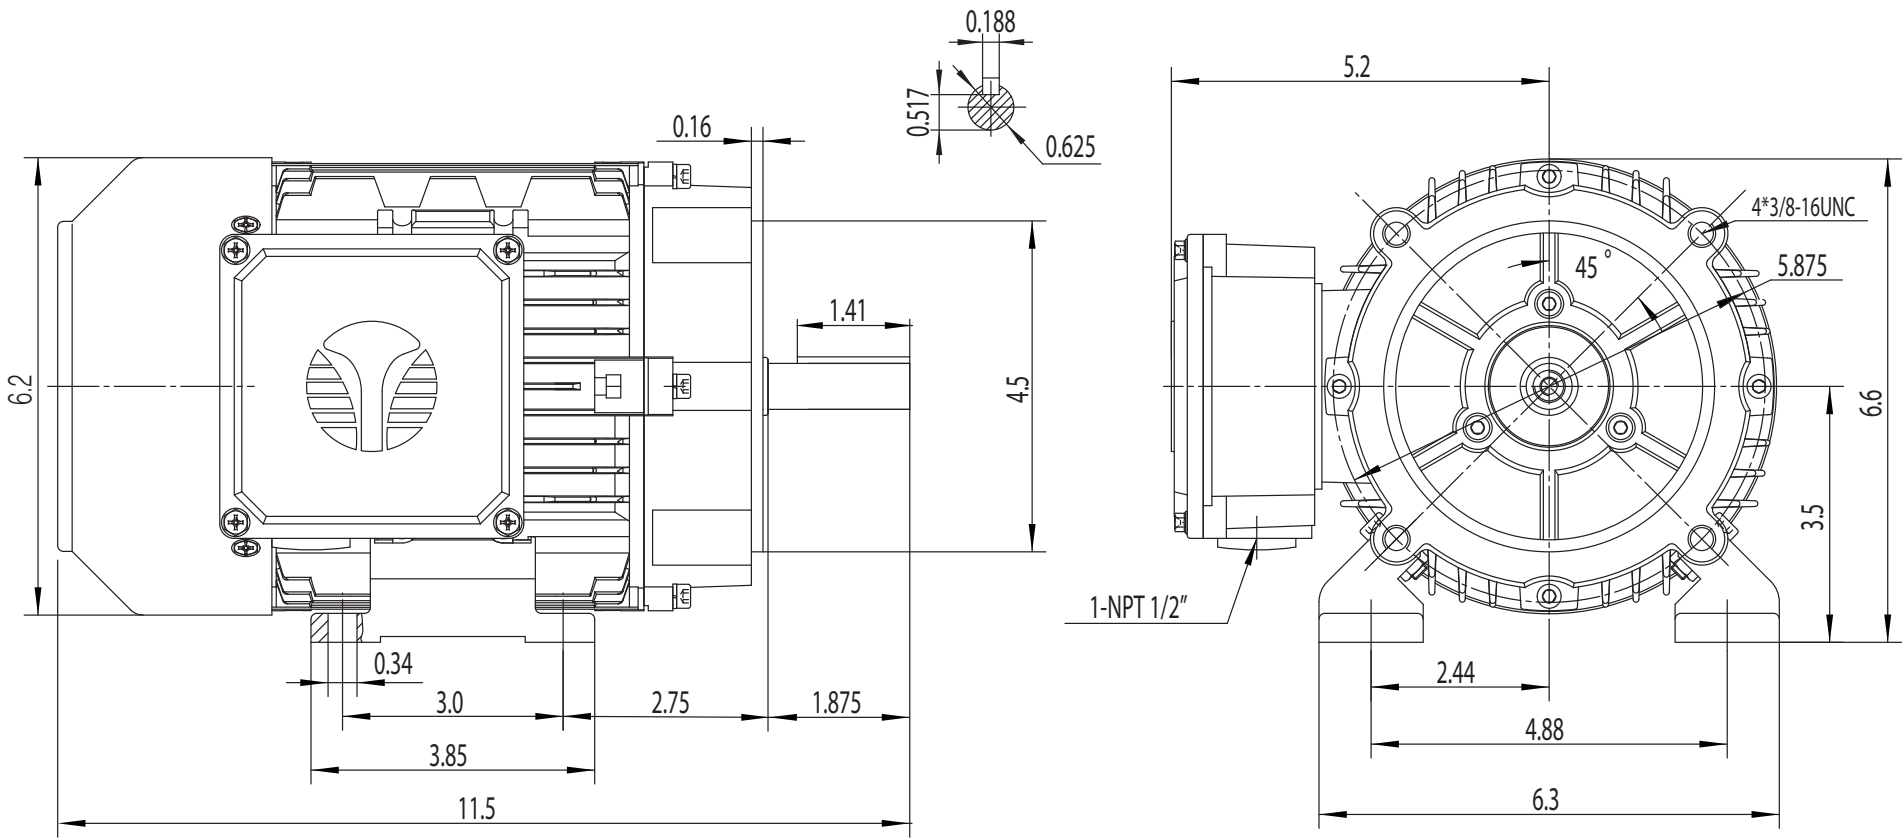

NEMA EPAct TEFC 56C

DRAWING NUMBER:	BL3-AL-TF-56C	ISSUED DATE	06/03/25
DIMENSIONS:	Inches	PREMIUM 56C ALUMINUM MOTORS	
MOUNTING:	Rigid/C-Flange		
CASING MATERIAL:	Cast Aluminum		