

NEMA

Model GRC0054D-TD
MFG PN: T184T5U4B

Model GRC0054D-TD

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
GRC0054D-TD	5	1750	230/460	3	60	184TD	Rigid/D-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techttopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techttopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techttopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techttopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techttopcanada.com

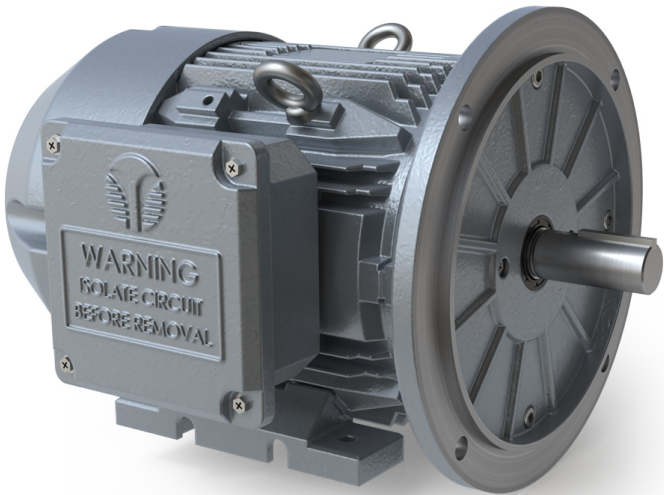

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model GRC0054D-TD
MFG PN: T184T5U4B


ELECTRICAL DATA		
Rated Motor Output Power	5	HP
	-	kW
Rated Motor Speed	1750	r/min 60Hz
	1430	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	12.6/6.3	A (I _n) @ 60Hz
	15/7.5	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	53.07	A (I _n) @ 60Hz
FI Current @ 208V	13.94	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	K	60Hz
	H	50Hz
Nominal Efficiency	89.5	% @ 60Hz
Nominal Power Factor	0.83	cosΦ @ 60Hz
Leads (Qty, Size)	9	16
Connection	YY/Y	-
Coil Resistance	2.539	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	52.4	°C @ 60Hz
	80	°C @ 50Hz

GENERAL DATA		
Frame Size	184TD	
Enclosure	TEFC	
Mounting	Rigid/D-Flange	
Approximate Weight (lbs.)	119.2 lbs.	
Casing Material / Fan Cover	Cast Iron	Cast Iron
Shaft Material	-	
NEMA Design	A	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	NO
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6306 ZZ	
Bearing ODE Side	6306 ZZ	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	0.35	
Sound Pressure @ 3 FT dBA	66	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	T3	-

Questions? Call 1.888.286.1820

NEMA

Model GRC0054D-TD
MFG PN: T184T5U4B

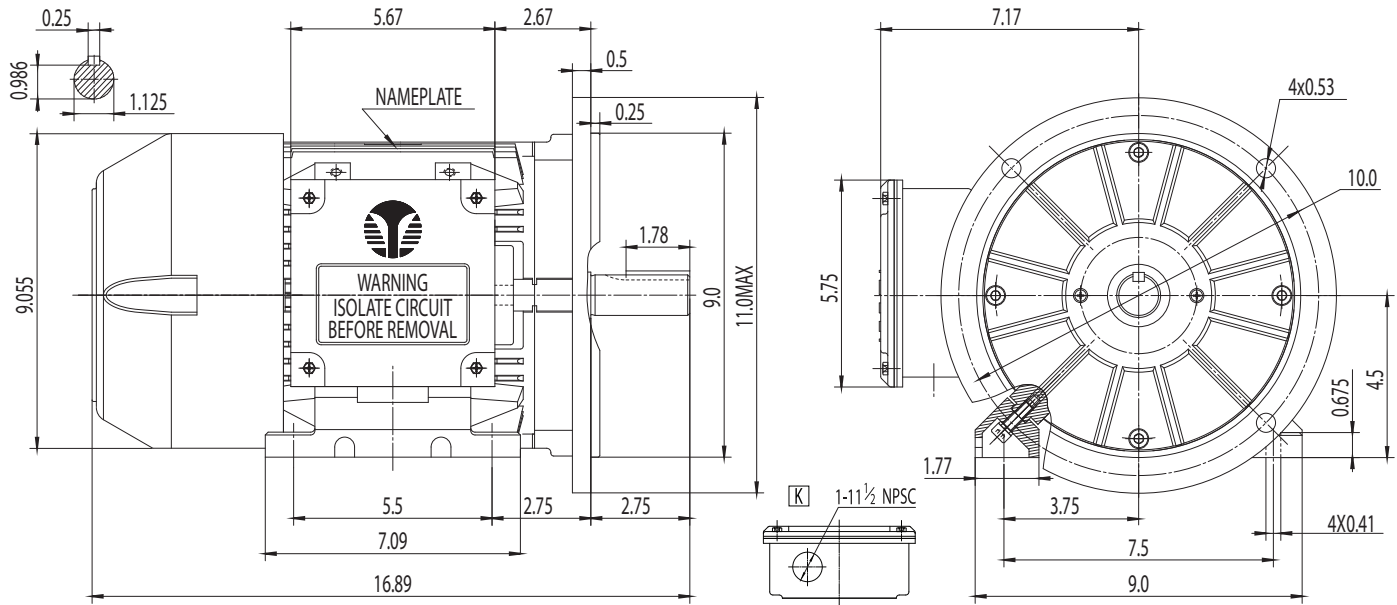

NAMEPLATE DATA	60Hz	50Hz
Horse Power	5	5
RPM	1750	1430
Voltage	230/460	190/380
Full Load Amps	12.6/6.3	15/7.5
Service Factor	1.25	1
KVA Code	K	H
Full Load Amps (208V)	13.94	-
Nominal Efficiency	89.5	86.4
Nominal Power Factor	0.83	-
Design	A	
Frame	184TD	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6306 ZZ	
Opposite Drive End Bearing	6306 ZZ	
Weight (lbs)	119.2	

NAMEPLATE LAYOUT

TECHTOP		INDUSTRIAL THREE PHASE MOTOR INVERTER DUTY 15:1 CT 30:1 VT - 1.0 SF	
MODEL		TECHTOPCANADA.COM	
NEMA Premium		60Hz	50Hz
HP		MFG PN	
RPM		MFG DATE	
VOLT		SER #	
FLA		DESIGN	
SF		FRAME	
KVA CODE		ENCL	
NOM.EFF		IP	
USABLE AT 208V 60Hz		DUTY	
FLA		INS CL	
BEARING SIZE		AMB	
DE	ODE	WEIGHT	
GREASE: MOBIL POLYREX EM		lbs	
MADE IN CHINA CLASS 1, DIV 2, GROUPS A, B, C AND D		IEEE 45 MARINE DUTY	

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	CSA CERTIFIED
Class / Division	Class I, Div. 2
Groups	A, B, C & D

Questions? Call 1.888.286.1820



Model GRC0054D-TD
MFG PN: T184T5U4B

Torque Speed (T-n) Curve

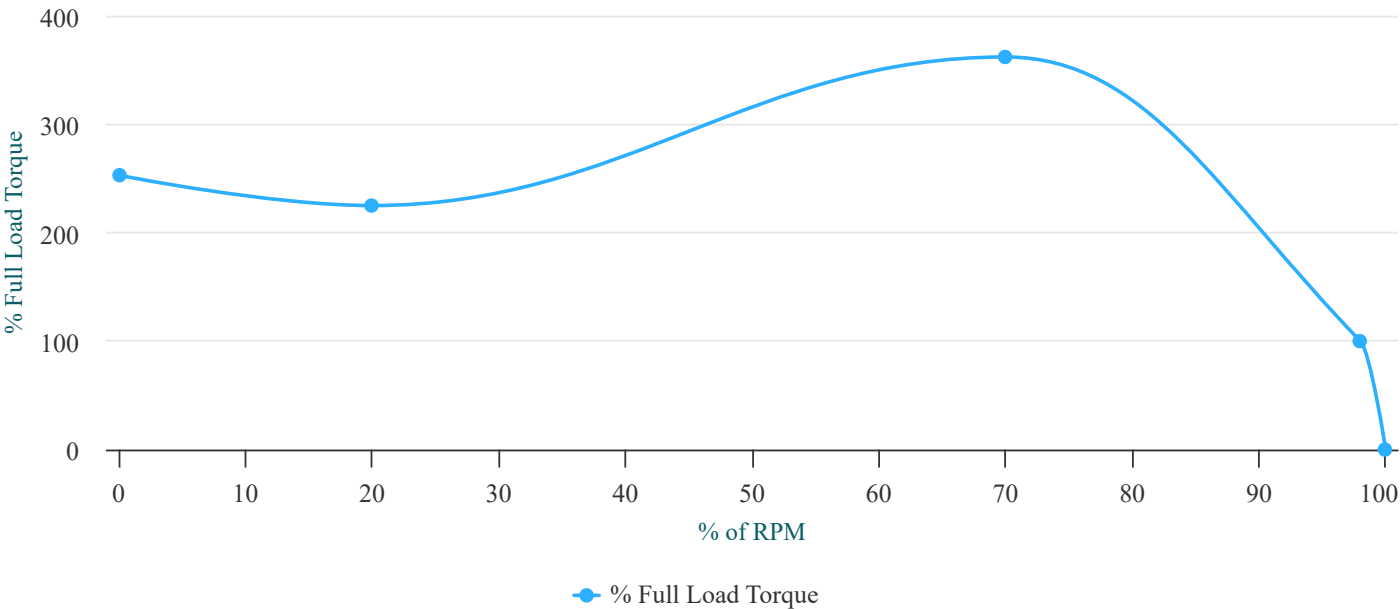

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	38	253	Start Configuration	DOL
Pull-Up Torque	33.8	225	Starting Current (A)	53.07
Breakdown Torque	54.3	362	No-Load Current (A)	2.9
Full Load Torque	15	100	No-Load Power Factor	0.07


TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	3.2	3.9	5	6.2	7.6	7.6
Efficiency (%)	84.4	89.5	90.3	89.8	88.8	88.8
Speed (r/min)	1788	1777	1765	1751	1737	1737
Power Factor (cosΦ)	0.44	0.66	0.78	0.84	0.86	0.86
Input Power (kW)	1.1	2.07	3.07	4.12	5.21	5.21

Questions? Call 1.888.286.1820



Model **GRC0054D-TD**
MFG PN: T184T5U4B

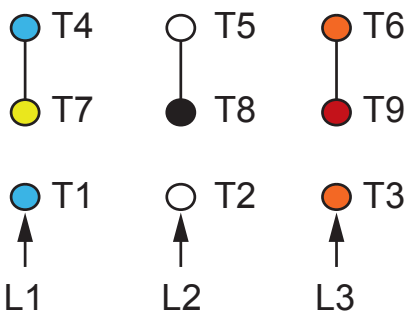

HIGH VOLTAGE
(Y)




LOW VOLTAGE
(YY)

- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY



NEMA 3Ø YY/Y 9-Lead Dual Voltage

DRAWING NUMBER:	NEMA-3-9-YY-Y	ISSUED DATE	05/05/25
CONNECTION:	YY/Y	PREMIUM T-FRAME CAST IRON MOTORS	
NUMBER OF LEADS:	9		
THERMAL PROTECTION:	-		

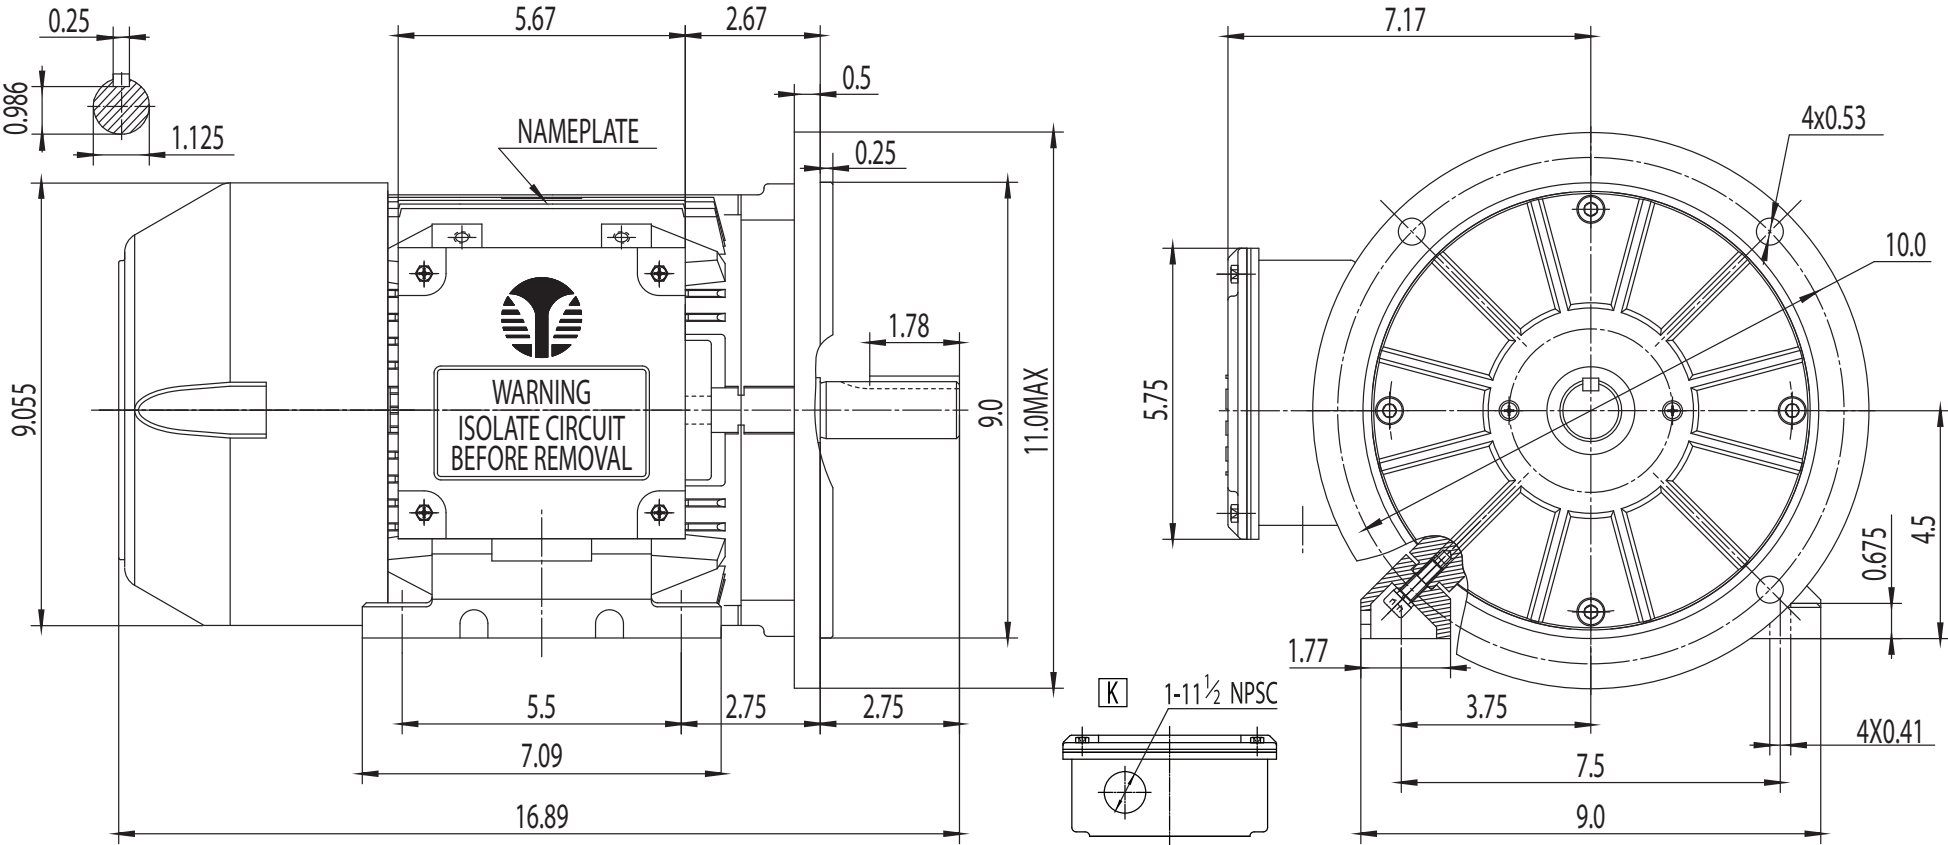

NEMA Premium TEFC 184TD

DRAWING NUMBER:	GR3-CI-TF-184TD-CFC	ISSUED DATE	05/05/25
DIMENSIONS:	Inches	PREMIUM T-FRAME CAST IRON MOTORS	
MOUNTING:	Rigid/D-Flange		
CASING MATERIAL:	Cast Iron		