

**NEMA**

**Model GRC0204D-TC**  
MFG PN: T256T20U4B

# Model GRC0204D-TC

## Product Data Package



| MODEL       | HP | RPM  | VOLTAGE | PHASE | Hz | FRAME | MOUNT          | ENCLOSURE |
|-------------|----|------|---------|-------|----|-------|----------------|-----------|
| GRC0204D-TC | 20 | 1770 | 230/460 | 3     | 60 | 256TC | Rigid/C-Flange | TEFC      |

### Toronto

**TOLL FREE** 1.888.286.1820  
**PHONE** 905.829.1001  
**EMAIL** info@techtopcanada.com

### Montreal

**TOLL FREE** 1.844.354.5111  
**PHONE** 514.354.1002  
**EMAIL** infoQC@techtopcanada.com

### Moncton


**PHONE** 506.386.5794  
**EMAIL** infoNB@techtopcanada.com

### Winnipeg

**PHONE** 204.633.2779  
**EMAIL** infoMB@techtopcanada.com

### Vancouver

**PHONE** 604.525.1551  
**EMAIL** infoBC@techtopcanada.com

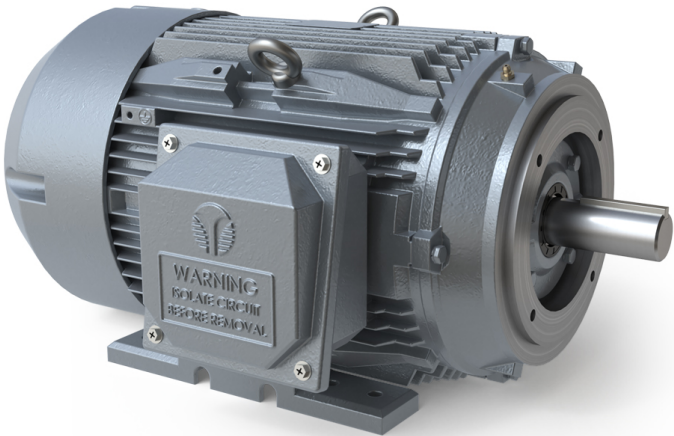

### Index

|                               |     |
|-------------------------------|-----|
| Motor General Data Sheet      | P 2 |
| Nameplate Information         | P 3 |
| Technical Performance Data    | P 4 |
| Motor General Wiring Diagram  | P 5 |
| Motor General Outline Drawing | P 6 |

# NEMA

**Model GRC0204D-TC**  
**MFG PN: T256T20U4B**



| ELECTRICAL DATA                     |           |                            |
|-------------------------------------|-----------|----------------------------|
| Rated Motor Output Power            | 20        | HP                         |
|                                     | -         | kW                         |
| Rated Motor Speed                   | 1770      | r/min 60Hz                 |
|                                     | 1460      | r/min 50Hz                 |
| Rated Motor Voltage (+/-10%)        | 230/460   | V/60Hz                     |
|                                     | 190/380   | V/50Hz                     |
| Rated Motor Current                 | 46.8/23.4 | A (I <sub>n</sub> ) @ 60Hz |
|                                     | 55.8/27.9 | A (I <sub>n</sub> ) @ 50Hz |
| Phase                               | 3         | Ø                          |
| Locked Rotor Current @ High Voltage | 263.6     | A (I <sub>n</sub> ) @ 60Hz |
| FI Current @ 208V                   | 51.79     | A (I <sub>n</sub> ) @ 60Hz |
| Service Factor                      | 1.25      | @ 60Hz                     |
|                                     | 1         | @ 50Hz                     |
| KVA Code                            | K         | 60Hz                       |
|                                     | H         | 50Hz                       |
| Nominal Efficiency                  | 93        | % @ 60Hz                   |
| Nominal Power Factor                | 0.86      | cosΦ @ 60Hz                |
| Leads (Qty, Size)                   | 12        | 12                         |
| Connection                          | DD/D      | -                          |
| Coil Resistance                     | 0.367     | Ω                          |
| Start Capacitor                     | -         | µF/V                       |
| Run Capacitor                       | -         | µF/V                       |
| VFD DUTY (S.F. 1.0)                 | RATIO     | Hz                         |
| Variable Torque                     | 30:1      | 2 - 60                     |
| Constant Torque                     | 15:1      | 4 - 60                     |
| FULL LOAD TEMPERATURE RISE          |           |                            |
| Full Load Temperature Rise          | 50.6      | °C @ 60Hz                  |
|                                     | 69.1      | °C @ 50Hz                  |

| GENERAL DATA                        |                  |           |
|-------------------------------------|------------------|-----------|
| Frame Size                          | 256TC            |           |
| Enclosure                           | TEFC             |           |
| Mounting                            | Rigid/C-Flange   |           |
| Approximate Weight (lbs.)           | 347.7 lbs.       |           |
| Casing Material / Fan Cover         | Cast Iron        | Cast Iron |
| Shaft Material                      | -                |           |
| NEMA Design                         | A                |           |
| Degree of Protection (IP)           | 55               |           |
| Insulation Class / Temp Rise (60Hz) | F                | B         |
| Tropicalization                     | YES              |           |
| Duty                                | Cont. / S1       |           |
| Conduit Box Location                | F1               |           |
| Feet Removable / Double Drilled     | YES              | YES       |
| Paintwork                           | 7024             |           |
|                                     | Graphite Gray    |           |
| MECHANICAL DATA                     |                  |           |
| Bearing DE Side                     | 6309 C3          |           |
| Bearing ODE Side                    | 6309 C3          |           |
| Grease Type                         | Mobil Polyrex EM |           |
| Compensation Ring (wavy washer)     | NDE              |           |
| Moment of Inertia (lb-ft²)          | 2.78             |           |
| Sound Pressure @ 3 FT dBA           | 75.6             |           |
| SITE CONDITIONS                     |                  |           |
| Ambient Temperature (°C)            | 40               |           |
| Meters Above Sea Level (MASL)       | 1000             |           |
| HAZARDOUS LOCATIONS                 |                  |           |
| CSA Certified                       | A, B, C & D      |           |
| Temperature Code                    | T3               | -         |

**Questions? Call 1.888.286.1820**

**NEMA**

**Model GRC0204D-TC**  
MFG PN: T256T20U4B

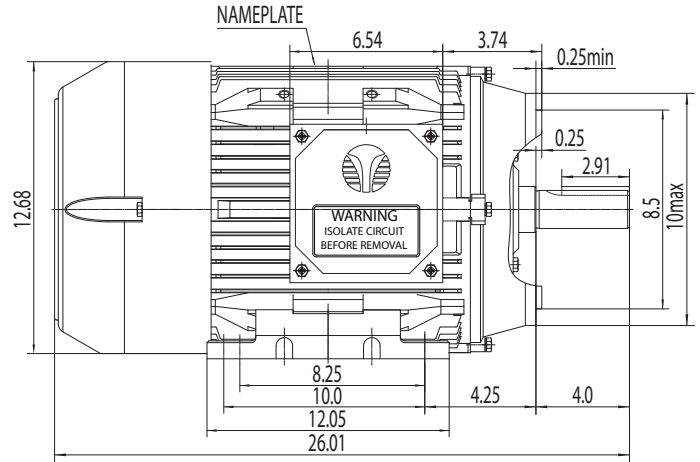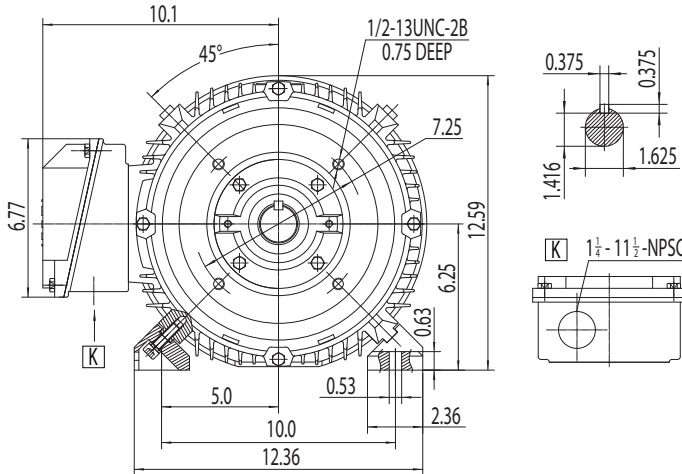

| NAMEPLATE DATA             | 60Hz       | 50Hz      |
|----------------------------|------------|-----------|
| Horse Power                | 20         | 20        |
| RPM                        | 1770       | 1460      |
| Voltage                    | 230/460    | 190/380   |
| Full Load Amps             | 46.8/23.4  | 55.8/27.9 |
| Service Factor             | 1.25       | 1         |
| KVA Code                   | K          | H         |
| Full Load Amps (208V)      | 51.79      | -         |
| Nominal Efficiency         | 93         | 91.5      |
| Nominal Power Factor       | 0.86       | -         |
| Design                     | A          |           |
| Frame                      | 256TC      |           |
| Enclosure Type             | TEFC       |           |
| IP Rating                  | 55         |           |
| Duty                       | Cont. / S1 |           |
| Insulation Class           | F          |           |
| Ambient Rating             | 40         |           |
| Drive End Bearing          | 6309 C3    |           |
| Opposite Drive End Bearing | 6309 C3    |           |
| Weight (lbs)               | 347.7      |           |

NAMEPLATE LAYOUT

|                                                    |     |                                                                        |      |
|----------------------------------------------------|-----|------------------------------------------------------------------------|------|
| <b>TECHTOP</b>                                     |     | INDUSTRIAL THREE PHASE MOTOR<br>INVERTER DUTY 15:1 CT 30:1 VT - 1.0 SF |      |
| MODEL                                              |     | TECHTOPCANADA.COM                                                      |      |
| NEMA Premium                                       |     | 60Hz                                                                   | 50Hz |
| HP                                                 |     | MFG PN                                                                 |      |
| RPM                                                |     | MFG DATE                                                               |      |
| VOLT                                               |     | SER #                                                                  |      |
| FLA                                                |     | DESIGN                                                                 |      |
| SF                                                 |     | FRAME                                                                  |      |
| KVA CODE                                           |     | ENCL                                                                   |      |
| NOM.EFF                                            |     | IP                                                                     |      |
| USABLE AT 208V 60Hz                                |     | DUTY                                                                   |      |
| FLA                                                |     | INS CL                                                                 |      |
| BEARING SIZE                                       |     | AMB                                                                    |      |
| DE                                                 | ODE | WEIGHT                                                                 |      |
| GREASE: MOBIL POLYREX EM                           |     |                                                                        |      |
| MADE IN CHINA CLASS 1, DIV 2, GROUPS A, B, C AND D |     | IEEE 45 MARINE DUTY                                                    |      |

| VFD DUTY (S.F. 1.0) | RATIO | Hz*    |
|---------------------|-------|--------|
| Variable Torque     | 30:1  | 2 - 60 |
| Constant Torque     | 15:1  | 4 - 60 |

\*For max speed please contact Techtop Canada


| HAZARDOUS LOCATIONS | CSA CERTIFIED   |
|---------------------|-----------------|
| Class / Division    | Class I, Div. 2 |
| Groups              | A, B, C & D     |

Questions? Call 1.888.286.1820

**NEMA**

**Model GRC0204D-TC**  
MFG PN: T256T20U4B

**Torque Speed (T-n) Curve**

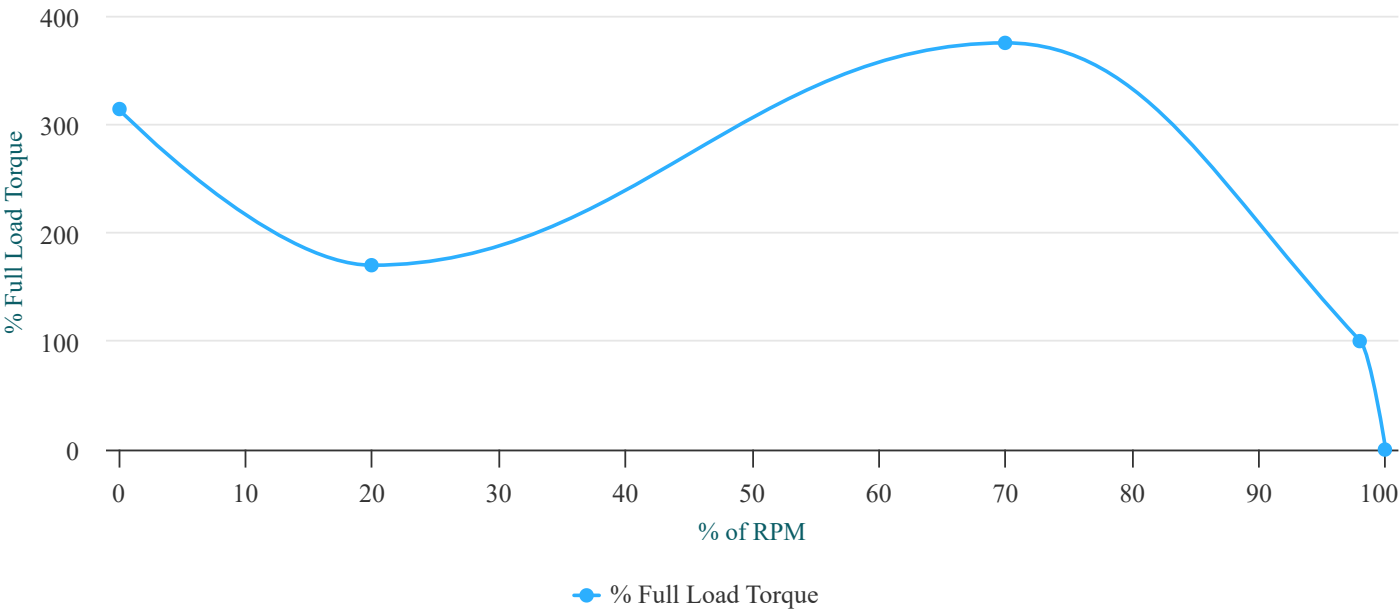

**PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz**

| TORQUE VALUES       | TORQUE (lb-ft) | TORQUE (% FULL LOAD) | PERFORMANCE VALUES   |       |
|---------------------|----------------|----------------------|----------------------|-------|
| Locked Rotor Torque | 186.3          | 314                  | Start Configuration  | DOL   |
| Pull-Up Torque      | 100.9          | 170                  | Starting Current (A) | 263.6 |
| Breakdown Torque    | 222.5          | 375                  | No-Load Current (A)  | 13    |
| Full Load Torque    | 59.3           | 100                  | No-Load Power Factor | -     |

**TYPICAL PERFORMANCE - NOT GUARANTEED VALUES**

| % OF RATED LOAD     | 25   | 50   | 75    | 100  | 125  | S.F. 1.25 |
|---------------------|------|------|-------|------|------|-----------|
| Line Amperes (A)    | 14   | 16.9 | 20.8  | 25.5 | 30.7 | 30.7      |
| Efficiency (%)      | 88   | 92.1 | 92.8  | 92.6 | 91.9 | 91.9      |
| Speed (r/min)       | 1795 | 1789 | 1783  | 1777 | 1771 | 1771      |
| Power Factor (cosΦ) | 0.38 | 0.6  | 0.73  | 0.8  | 0.83 | 0.83      |
| Input Power (kW)    | 4.26 | 8.14 | 12.12 | 16.2 | 20.4 | 20.4      |

Questions? Call 1.888.286.1820



Model **GRC0204D-TC**  
MFG PN: T256T20U4B



HIGH VOLTAGE  
(Δ)



LOW VOLTAGE  
(ΔΔ)

- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
  - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
  - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “\*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
  - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
  - 5. DIAGRAMS FOR REFERENCE ONLY




**NEMA 3Ø DD/D 12-Lead Dual Voltage**

|                     |                |
|---------------------|----------------|
| DRAWING NUMBER:     | NEMA-3-12-DD-D |
| CONNECTION:         | DD/D           |
| NUMBER OF LEADS:    | 12             |
| THERMAL PROTECTION: | -              |

|                                  |          |
|----------------------------------|----------|
| ISSUED DATE                      | 26/05/25 |
| PREMIUM T-FRAME CAST IRON MOTORS |          |



Model **GRC0204D-TC**  
MFG PN: T256T20U4B

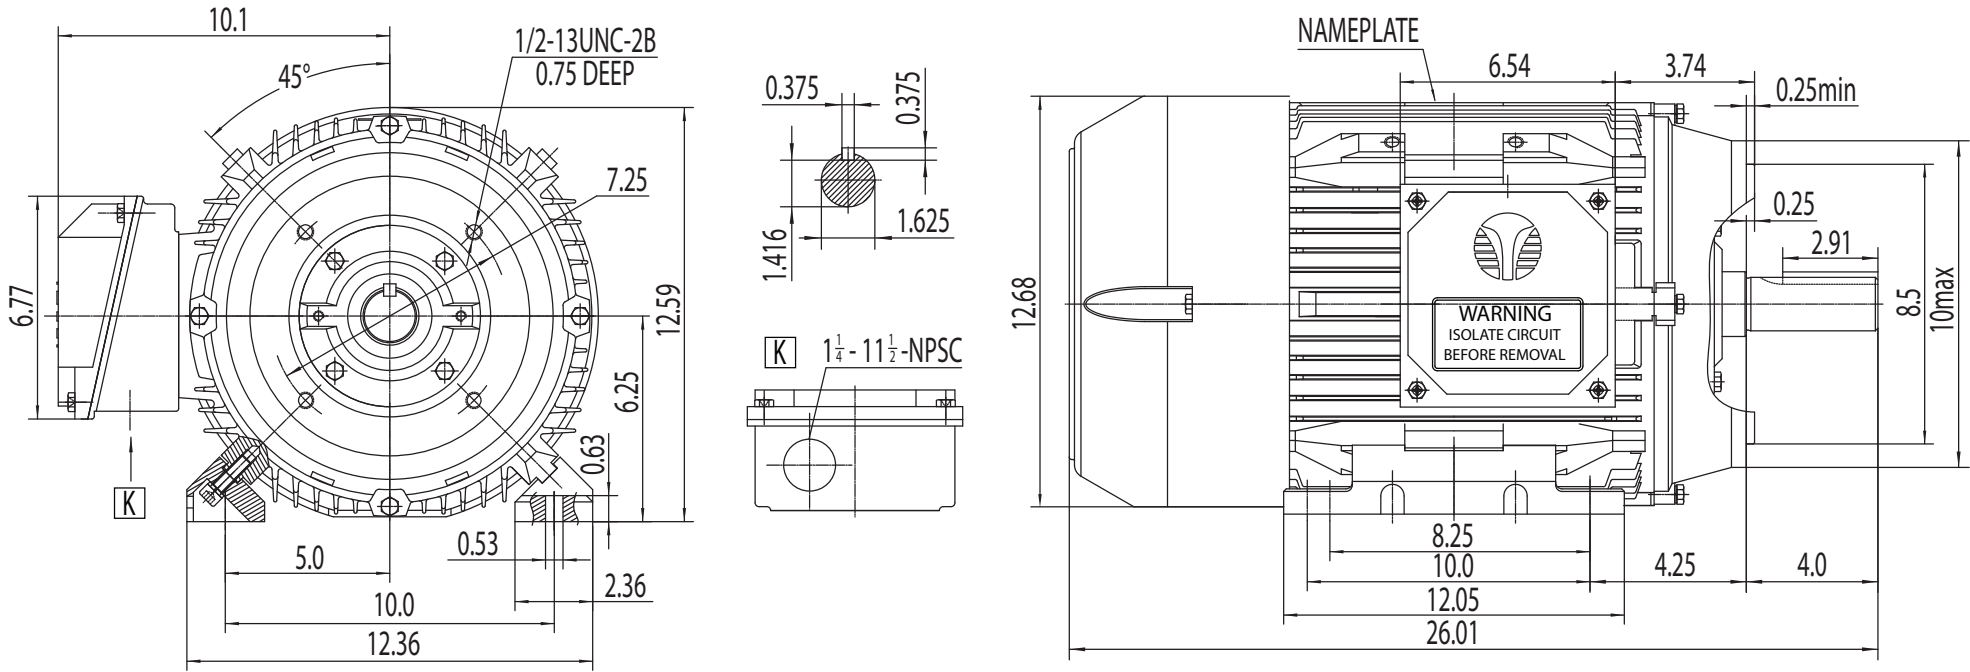

**NEMA Premium TEFC 256TC**

|                  |                     |                                  |          |
|------------------|---------------------|----------------------------------|----------|
| DRAWING NUMBER:  | GR3-CI-TF-256TC-CFC | ISSUED DATE                      | 26/05/25 |
| DIMENSIONS:      | Inches              | PREMIUM T-FRAME CAST IRON MOTORS |          |
| MOUNTING:        | Rigid/C-Flange      |                                  |          |
| CASING MATERIAL: | Cast Iron           |                                  |          |