

NEMA

Model DPC0604D-TC
MFG PN: TDC 364T60U4B

Model DPC0604D-TC

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
DPC0604D-TC	60	1780	230/460	3	60	364TC	Rigid/C-Flange	ODP

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techttopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techttopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techttopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techttopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techttopcanada.com

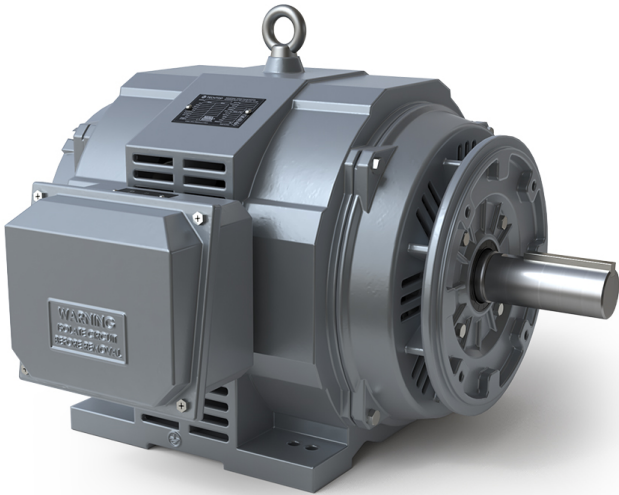

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model DPC0604D-TC
 MFG PN: TDC 364T60U4B



ELECTRICAL DATA		
Rated Motor Output Power	60	HP
	45	kW
Rated Motor Speed	1780	r/min 60Hz
	1470	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	135.95/67.98	A (I _n) @ 60Hz
	163.1/81.55	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	664.8	A (I _n) @ 60Hz
FI Current @ 208V	150.33	A (I _n) @ 60Hz
Service Factor	1.15	@ 60Hz
	1	@ 50Hz
KVA Code	K	60Hz
	H	50Hz
Nominal Efficiency	95	% @ 60Hz
Nominal Power Factor	0.87	cosΦ @ 60Hz
Leads (Qty, Size)	12	8
Connection	DD/D	—
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	28.6	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	364TC	
Enclosure	ODP	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	650 lbs.	
Casing Material / Fan Cover	Cast Iron	-
Shaft Material	1045	
NEMA Design	A	
Degree of Protection (IP)	23	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	NO	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6313 C3	
Bearing ODE Side	6313 C3	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	-	
Temperature Code	-	-

Questions? Call 1.888.286.1820

NEMA

Model DPC0604D-TC
 MFG PN: TDC 364T60U4B

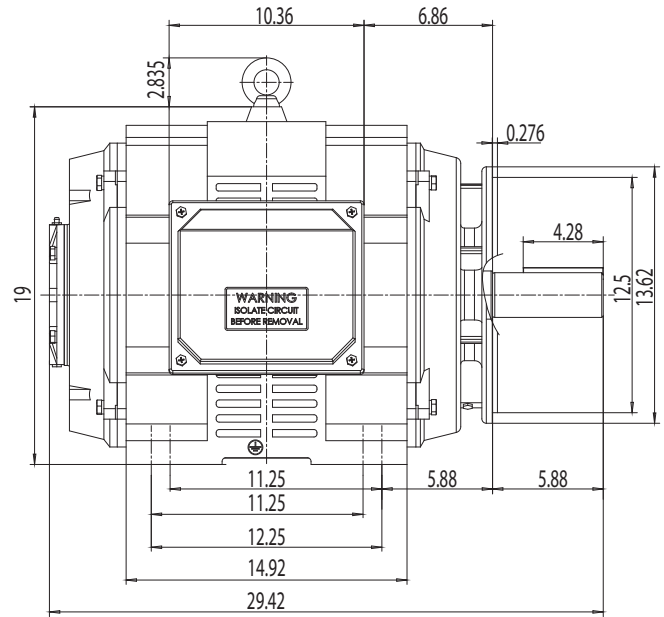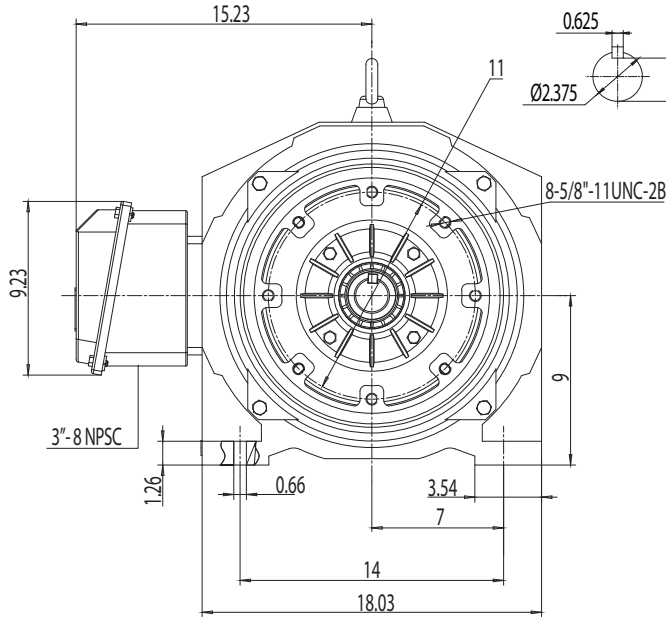

NAMEPLATE DATA	60Hz	50Hz
Horse Power	60	60
RPM	1780	1470
Voltage	230/460	190/380
Full Load Amps	135.95/67.98	163.1/81.55
Service Factor	1.15	1
KVA Code	K	H
Full Load Amps (208V)	150.33	-
Nominal Efficiency	95	93.7
Nominal Power Factor	0.87	0.89
Design	A	
Frame	364TC	
Enclosure Type	ODP	
IP Rating	23	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6313 C3	
Opposite Drive End Bearing	6313 C3	
Weight (lbs)	650	

NAMEPLATE LAYOUT

TECHTOP		INDUSTRIAL THREE PHASE MOTOR INVERTER DUTY 15:1 CT 30:1 VT - 1.0 SF	
MODEL		TECHTOPCANADA.COM	
NEMA Premium		60Hz	50Hz
HP		MFG PN	
RPM		MFG DATE	
VOLT		SER #	
FLA		DESIGN	
SF		FRAME	
KVA CODE		ENCL	
NOM.EFF		IP	
USABLE AT 208V 60Hz		DUTY	
FLA		INS CL	
BEARING SIZE		AMB	
DE	ODE	WEIGHT	lbs
GREASE: MOBIL POLYREX EM			
MADE IN CHINA			

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	
Class / Division	-
Groups	-

Questions? Call 1.888.286.1820

NEMA

Model DPC0604D-TC
MFG PN: TDC 364T60U4B

Torque Speed (T-n) Curve

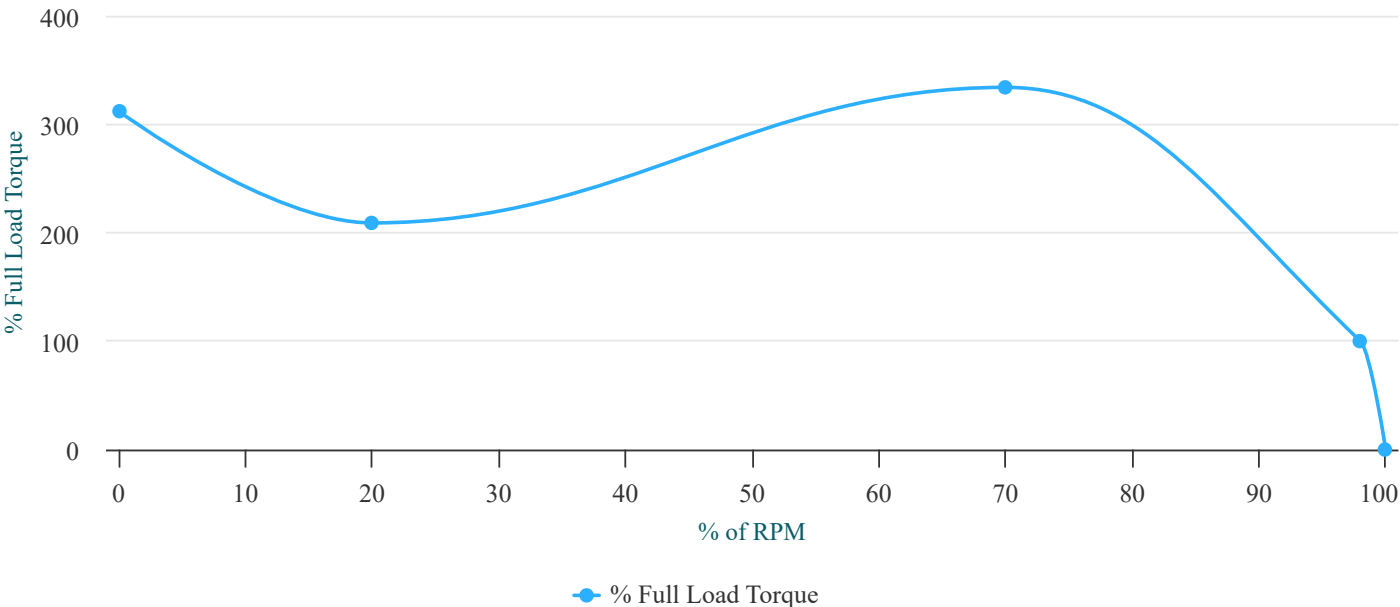



PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	552.6	312	Start Configuration	DOL
Pull-Up Torque	370.2	209	Starting Current (A)	664.8
Breakdown Torque	591.6	334	No-Load Current (A)	25.6
Full Load Torque	177.1	100	No-Load Power Factor	-


TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.15
Line Amperes (A)	30	40.7	53.7	68.4	84.5	84.5
Efficiency (%)	91.7	94.7	95.3	95.2	94.8	94.8
Speed (r/min)	1797	1794	1790	1786	1783	1783
Power Factor (cosΦ)	0.51	0.73	0.83	0.87	0.88	0.88
Input Power (kW)	12.27	23.76	35.43	47.29	59.36	59.36

Questions? Call 1.888.286.1820

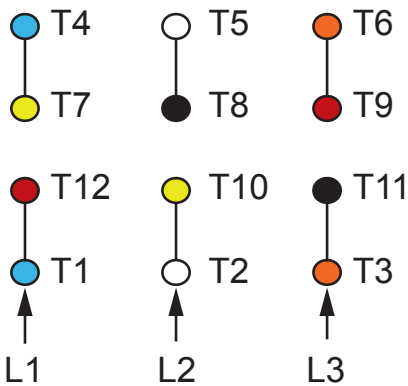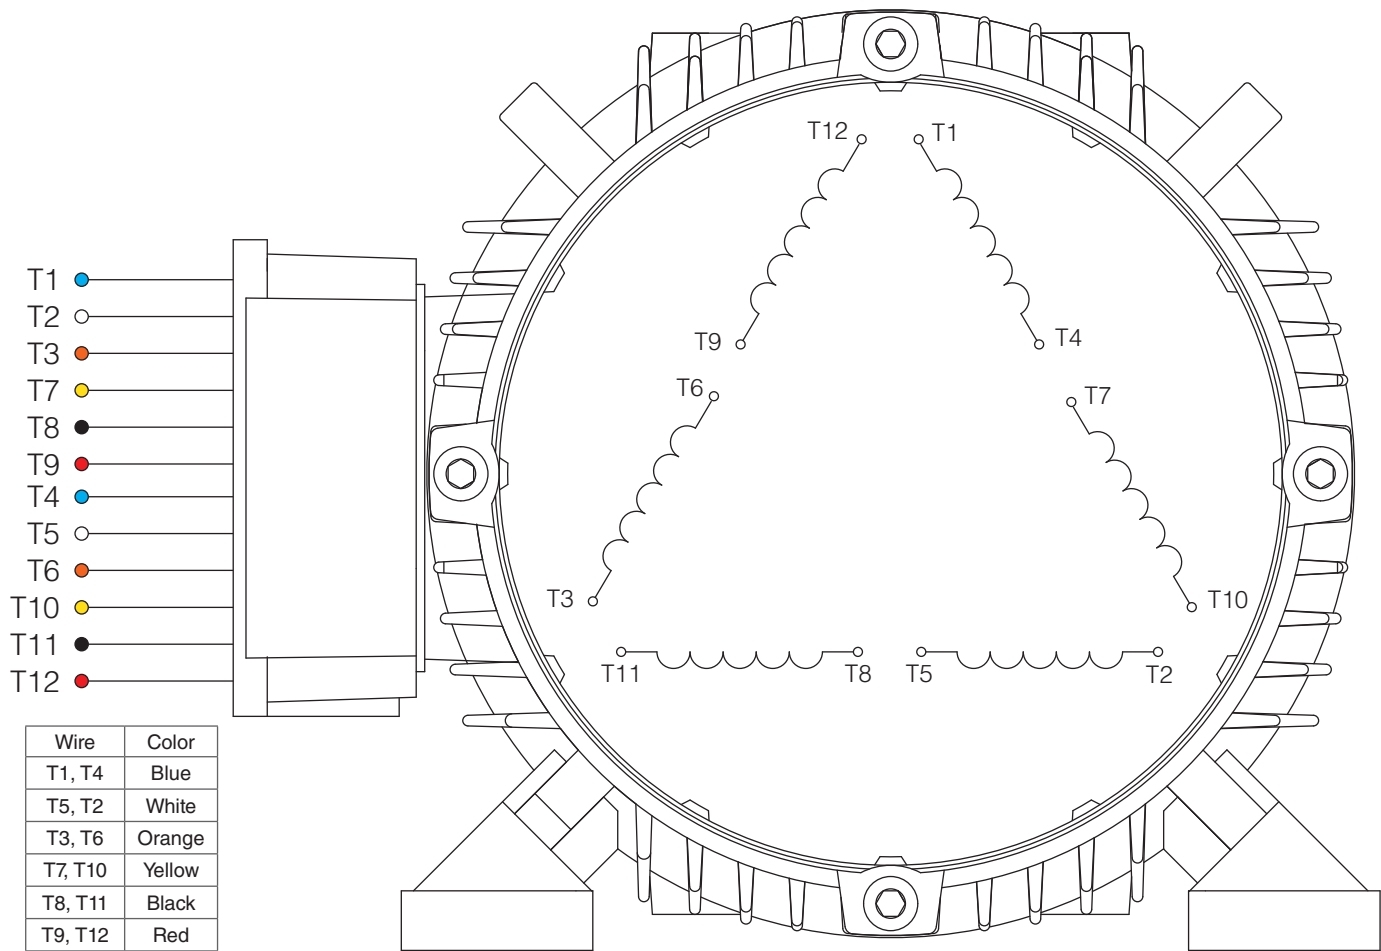

HIGH VOLTAGE
(Δ)

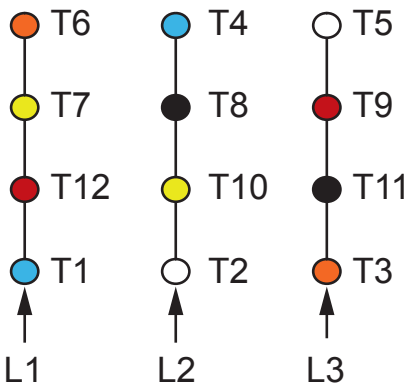

LOW VOLTAGE
(ΔΔ)



- NOTES:
1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 5. DIAGRAMS FOR REFERENCE ONLY



 TECHTOP <i>You can't top a Techtop.</i>		NEMA 3Ø DD/D 12-Lead Dual Voltage	
DRAWING NUMBER:	NEMA-3-12-DD-D	ISSUED DATE	23/06/25
CONNECTION:	DD/D		
NUMBER OF LEADS:	12	PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP	
THERMAL PROTECTION:	-		



Model DPC0604D-TC
MFG PN: TDC 364T60U4B

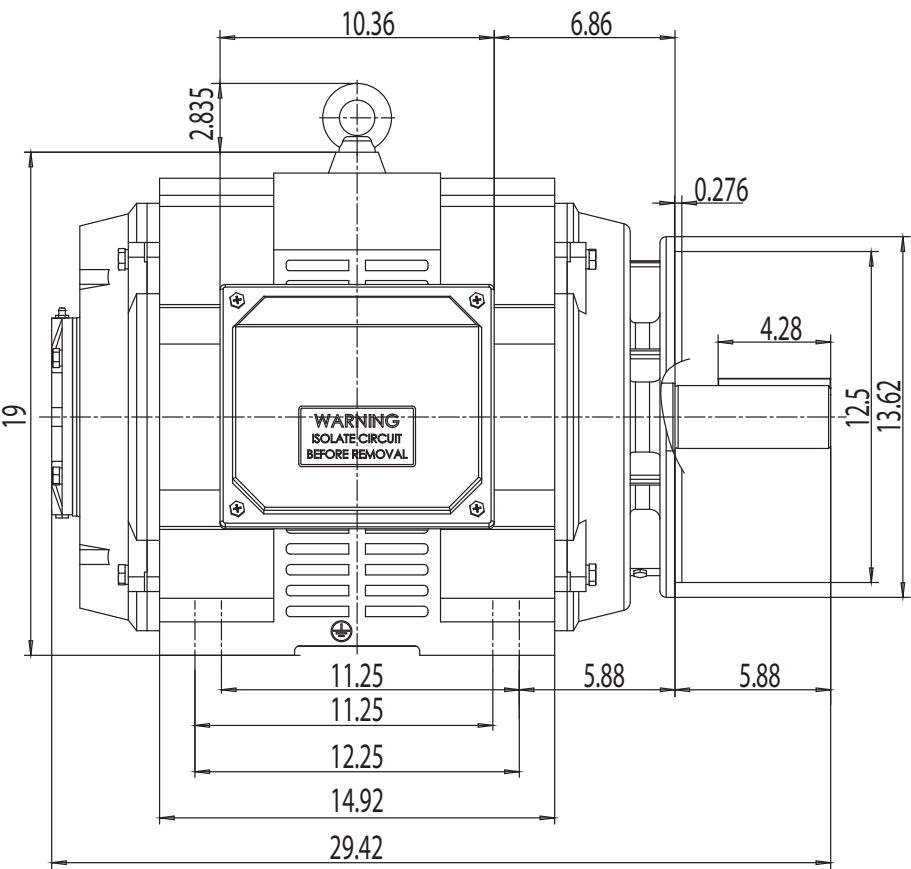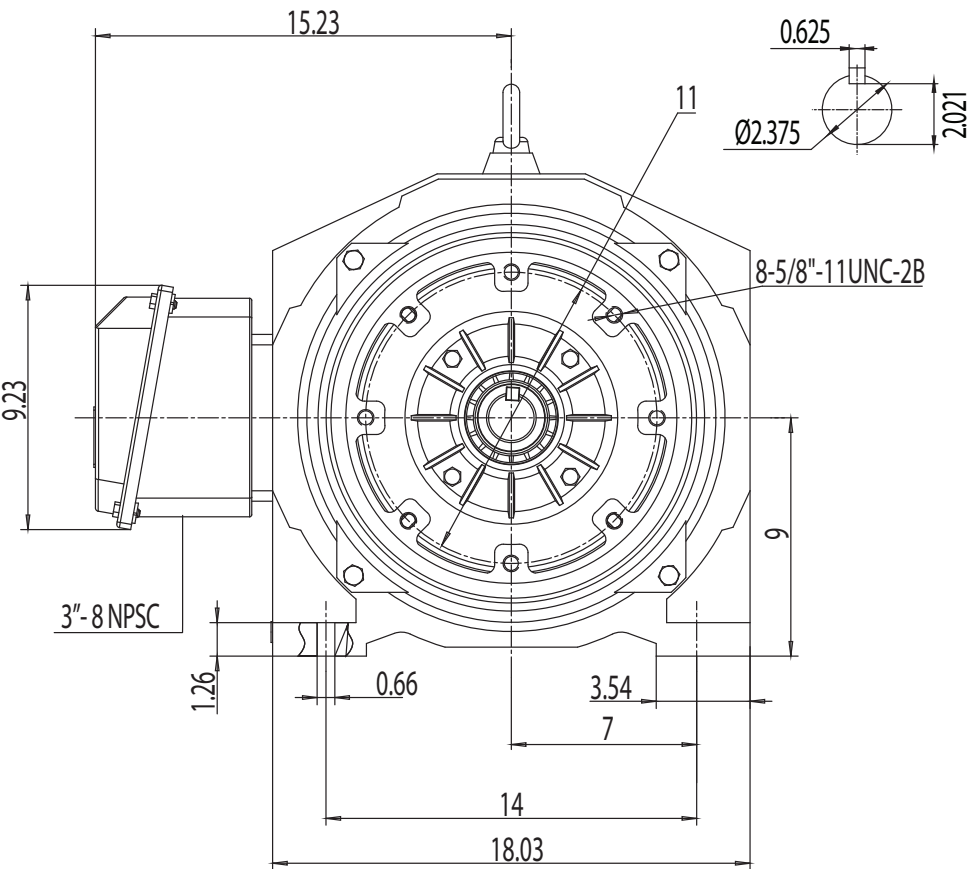

NEMA Premium ODP 364TC

DRAWING NUMBER:

GR3-CI-DP-364(5)TC

DIMENSIONS:

Inches

MOUNTING:

Rigid/C-Flange

CASING MATERIAL:

Cast Iron

ISSUED DATE

23/06/25

PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP