

NEMA

Model GPS0012C-C-01
MFG PN: SLF56H1.5Z2L

Model **GPS0012C-C-01**

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
GPS0012C-C-01	1.5	3460	115/208-230	1	60	56HC	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techttopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techttopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techttopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techttopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techttopcanada.com

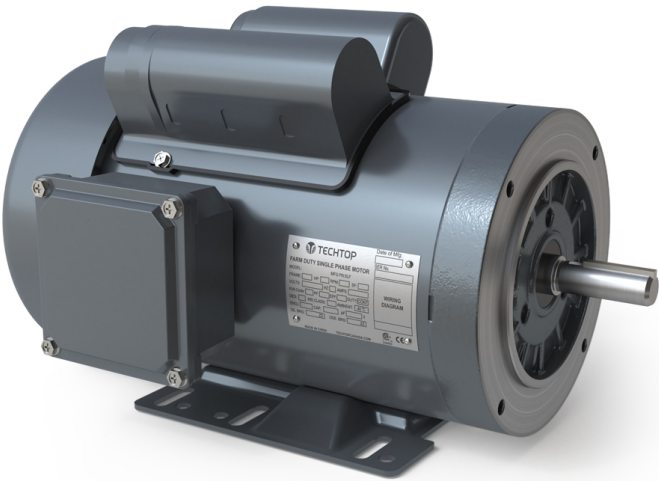

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6




Model GPS0012C-C-01
MFG PN: SLF56H1.5Z2L

ELECTRICAL DATA		
Rated Motor Output Power	1.5	HP
	-	kW
Rated Motor Speed	3460	r/min 60Hz
	-	r/min 50Hz
Rated Motor Voltage (+/-10%)	115/208-230	V/60Hz
	-	V/50Hz
Rated Motor Current	13.4/7.4-6.7	A (I _n) @ 60Hz
	-	A (I _n) @ 50Hz
Phase	1	Ø
Locked Rotor Current @ High Voltage	49.59	A (I _n) @ 60Hz
FI Current @ 208V	7.4	A (I _n) @ 60Hz
Service Factor	1.15	@ 60Hz
	-	@ 50Hz
KVA Code	J	60Hz
	-	50Hz
Nominal Efficiency	76	% @ 60Hz
Nominal Power Factor	0.93	cosΦ @ 60Hz
Leads (Qty, Size)	6	14
Connection	-	-
Coil Resistance	-	Ω
Start Capacitor	450/165	µF/V
Run Capacitor	100/250	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	-	-
Constant Torque	-	-
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	48.4	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	56HC	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	40 lbs.	
Casing Material / Fan Cover	Rolled Steel	Steel
Shaft Material	1045	
NEMA Design	L	
Degree of Protection (IP)	54	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	NO	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	NO	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6204 2RS	
Bearing ODE Side	6203 2RS	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	-	
Temperature Code	-	-

Questions? Call 1.888.286.1820

Model GPS0012C-C-01
MFG PN: SLF56H1.5Z2L



NAMEPLATE LAYOUT



TECHTOP

Date of Mfg:

SER No.

GEN. PURPOSE SINGLE PHASE MOTOR

MODEL:

MFG PN:SLF

FRAME:

HP:

RPM:

SF:

VOLTS:

HZ:

AMPS:

KVA Code:

PF:

EFF:

DUTY:

DES:

INS.CLASS:

AMBIENT:

ENCL:

CAP:

μF:

V:

DE. BRG:

ODE. BRG:

WIRING DIAGRAM



C US
224693



*For max speed please contact Techtop Canada

Questions? Call 1.888.286.1820

NEMA

Model GPS0012C-C-01
MFG PN: SLF56H1.5Z2L


PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz			TYPICAL PERFORMANCE - NOT GUARANTEED VALUES	
TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	2.3	4	Start Configuration	DOL
Pull-Up Torque	5.1	226	Starting Current (A)	49.59
Breakdown Torque	7.4	323	No-Load Current (A)	1.7
Full Load Torque	0.1	100	No-Load Power Factor	-

% OF RATED LOAD	25	50	75	100	125	S.F. 1.15
Line Amperes (A)	-	-	-	6.2	-	7
Efficiency (%)	-	-	-	77.6	-	79.3
Speed (r/min)	-	-	-	3523	-	3508
Power Factor (cosΦ)	-	-	-	1	-	1
Input Power (kW)	-	-	-	-	-	-

Questions? Call 1.888.286.1820





Model **GPS0012C-C-01**
MFG PN: SLF56H1.5Z2L

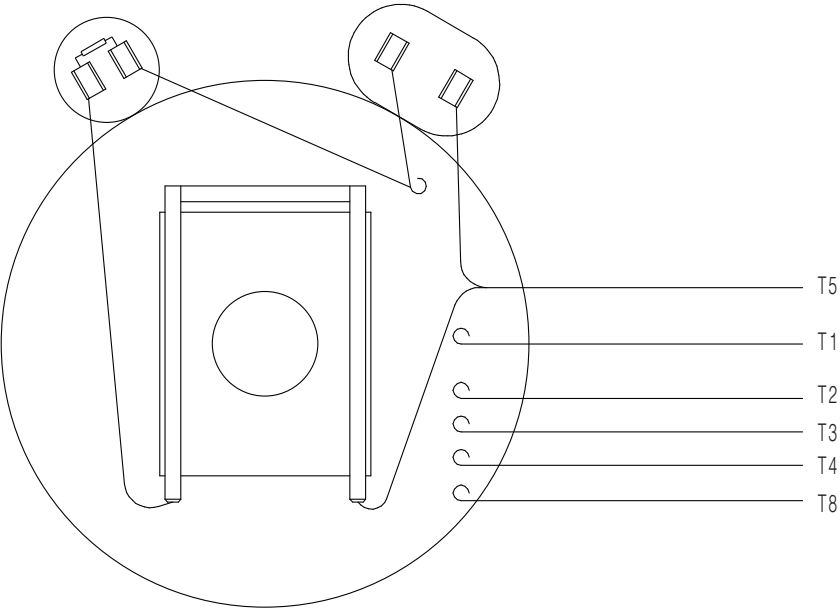


LINE LEADS

VOLTAGE	ROTATION FACING LEAD END	L1	L2	JOIN
HIGH	CCW	T1	T4, T5	T2&T3&T8
	CW	T1	T4, T8	T2&T3&T5
LOW	CCW	T1,T3,T8	T2,T4,T5	--
	CW	T1,T3,T5	T2,T4,T8	--

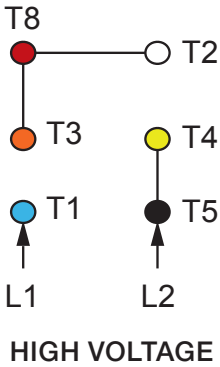

NEMA 10 General Purpose Dual Voltage

DRAWING NUMBER:	NEMA-GP-56-140T	ISSUED DATE	01/08/25
CONNECTION:	-	GENERAL PURPOSE SINGLE PHASE MOTORS	
NUMBER OF LEADS:	6		
THERMAL PROTECTION:	Optional		



DRAWING NUMBER:	BL1-RS-TF-56HC-01	ISSUED DATE	01/08/25
DIMENSIONS:	Inches		
MOUNTING:	Rigid/C-Flange	GENERAL PURPOSE SINGLE PHASE MOTORS	
CASING MATERIAL:	Rolled Steel		