

NEMA

Model GRC0504D-TC
MFG PN: T326T50U4B

Model GRC0504D-TC

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
GRC0504D-TC	50	1780	230/460	3	60	326TC	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techtopcanada.com

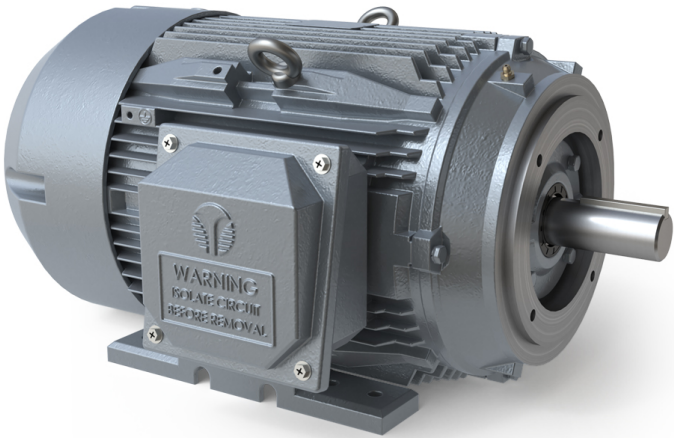

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model GRC0504D-TC
MFG PN: T326T50U4B



ELECTRICAL DATA		
Rated Motor Output Power	50	HP
	-	kW
Rated Motor Speed	1780	r/min 60Hz
	1470	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	115.2/57.6	A (I _n) @ 60Hz
	138/69	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	483.9	A (I _n) @ 60Hz
FI Current @ 208V	127.4	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	J	60Hz
	G	50Hz
Nominal Efficiency	94.5	% @ 60Hz
Nominal Power Factor	0.86	cosΦ @ 60Hz
Leads (Qty, Size)	12	8
Connection	DD/D	-
Coil Resistance	0.133	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	61.1	°C @ 60Hz
	85.1	°C @ 50Hz

GENERAL DATA		
Frame Size	326TC	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	632.7 lbs.	
Casing Material / Fan Cover	Cast Iron	Cast Iron
Shaft Material	-	
NEMA Design	A	
Degree of Protection (IP)	55	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6312 C3	
Bearing ODE Side	6312 C3	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	8.34	
Sound Pressure @ 3 FT dBA	80	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	T3A	-

Questions? Call 1.888.286.1820

NEMA

Model GRC0504D-TC
MFG PN: T326T50U4B

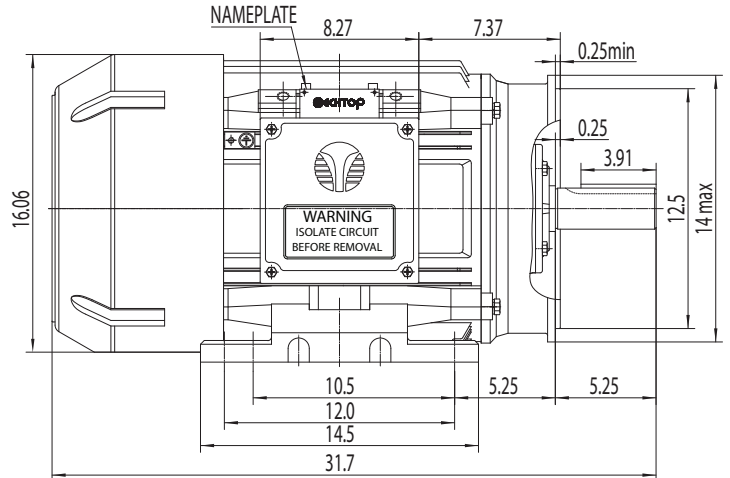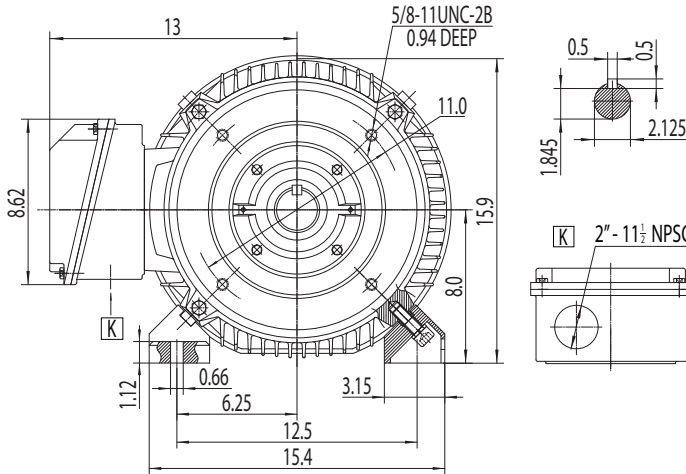

NAMEPLATE DATA	60Hz	50Hz
Horse Power	50	50
RPM	1780	1470
Voltage	230/460	190/380
Full Load Amps	115.2/57.6	138/69
Service Factor	1.25	1
KVA Code	J	G
Full Load Amps (208V)	127.4	-
Nominal Efficiency	94.5	92.8
Nominal Power Factor	0.86	-
Design	A	
Frame	326TC	
Enclosure Type	TEFC	
IP Rating	55	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6312 C3	
Opposite Drive End Bearing	6312 C3	
Weight (lbs)	632.7	

NAMEPLATE LAYOUT

TECHTOP		INDUSTRIAL THREE PHASE MOTOR INVERTER DUTY 15:1 CT 30:1 VT - 1.0 SF	
MODEL		TECHTOPCANADA.COM	
NEMA Premium		60Hz	50Hz
HP			
RPM			
VOLT			
FLA			
SF			
KVA CODE			
NOM.EFF			
USABLE AT 208V 60Hz		BEARING SIZE	
FLA		DE	ODE
		GREASE: MOBIL POLYREX EM	
MADE IN CHINA		CLASS 1, DIV 2, GROUPS A, B, C AND D	
		IEEE 45 MARINE DUTY	
		MFG PN	
		MFG DATE	
		SER #	
		DESIGN	
		FRAME	
		ENCL	
		IP	
		DUTY	
		INS CL	
		AMB	
		WEIGHT	
		lbs	
		Energy Verified	
		CE	
		CC098A	
		E323353	
		224693	

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	CSA CERTIFIED
Class / Division	Class I, Div. 2
Groups	A, B, C & D

Questions? Call 1.888.286.1820

NEMA

Model GRC0504D-TC
MFG PN: T326T50U4B

Torque Speed (T-n) Curve

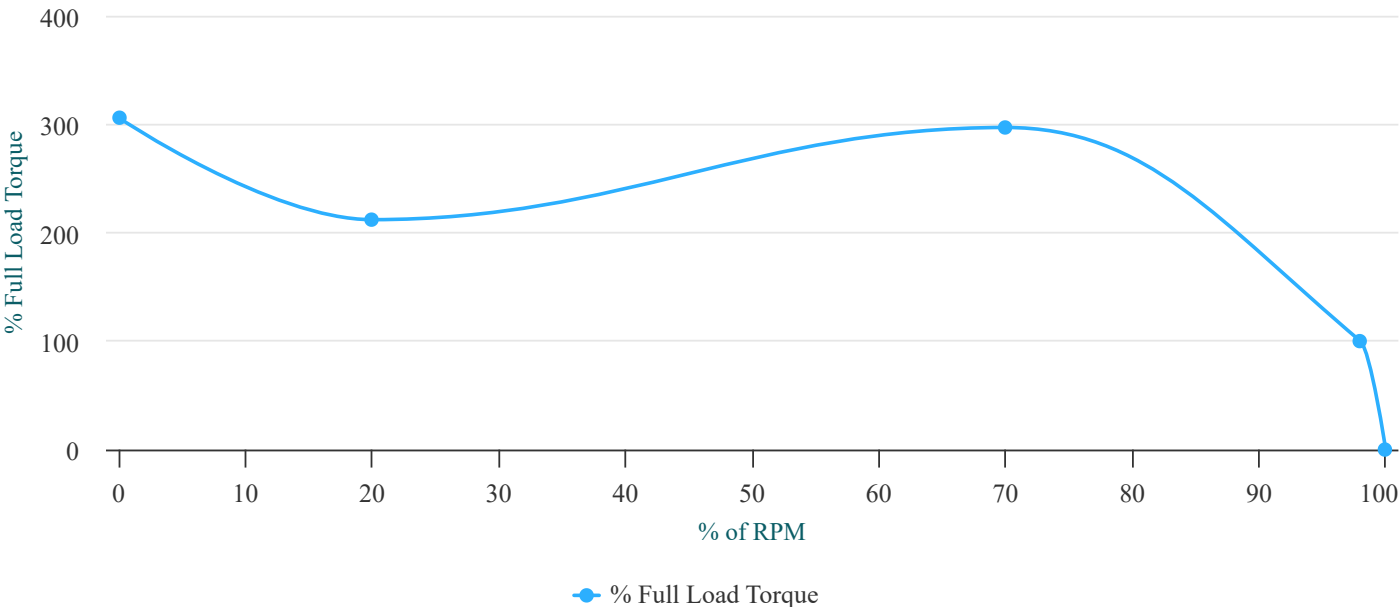

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	451.4	306	Start Configuration	DOL
Pull-Up Torque	312.8	212	Starting Current (A)	483.9
Breakdown Torque	438.2	297	No-Load Current (A)	22.5
Full Load Torque	147.5	100	No-Load Power Factor	-




TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	25.9	34.4	45.2	57.7	71.2	71.2
Efficiency (%)	91.7	94.3	94.5	94.1	93.3	93.3
Speed (r/min)	1795	1790	1785	1780	1774	1774
Power Factor (cosΦ)	0.49	0.72	0.81	0.86	0.87	0.87
Input Power (kW)	10.09	19.62	29.36	39.32	49.55	49.55

Questions? Call **1.888.286.1820**



Model **GRC0504D-TC**
MFG PN: T326T50U4B

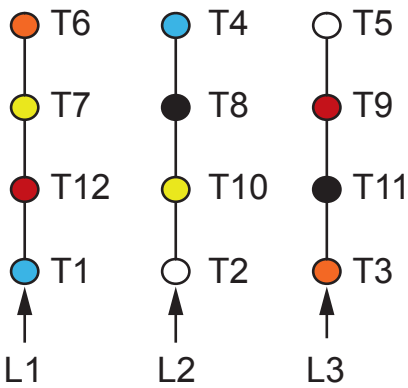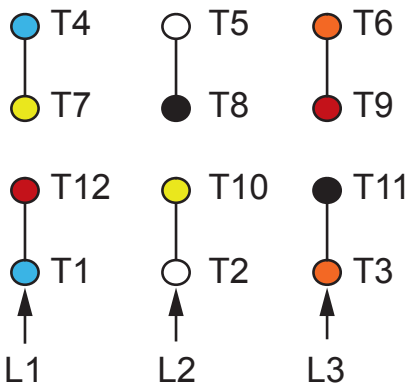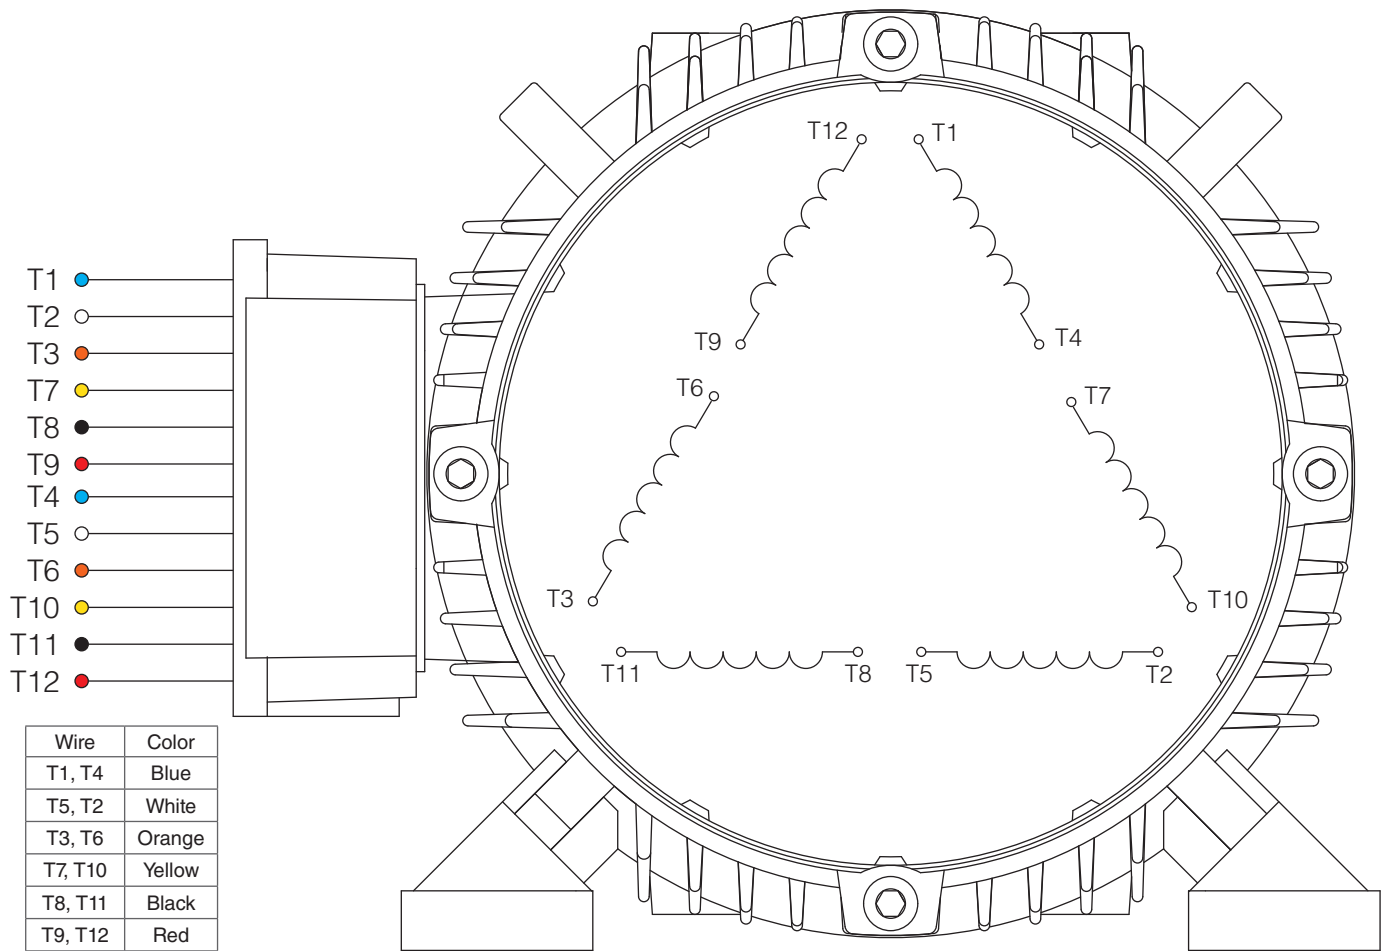


- NOTES:
- CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - DIAGRAMS FOR REFERENCE ONLY



NEMA 3Ø DD/D 12-Lead Dual Voltage

DRAWING NUMBER:	NEMA-3-12-DD-D	ISSUED DATE	30/05/25
CONNECTION:	DD/D	PREMIUM T-FRAME CAST IRON MOTORS	
NUMBER OF LEADS:	12		
THERMAL PROTECTION:	-		

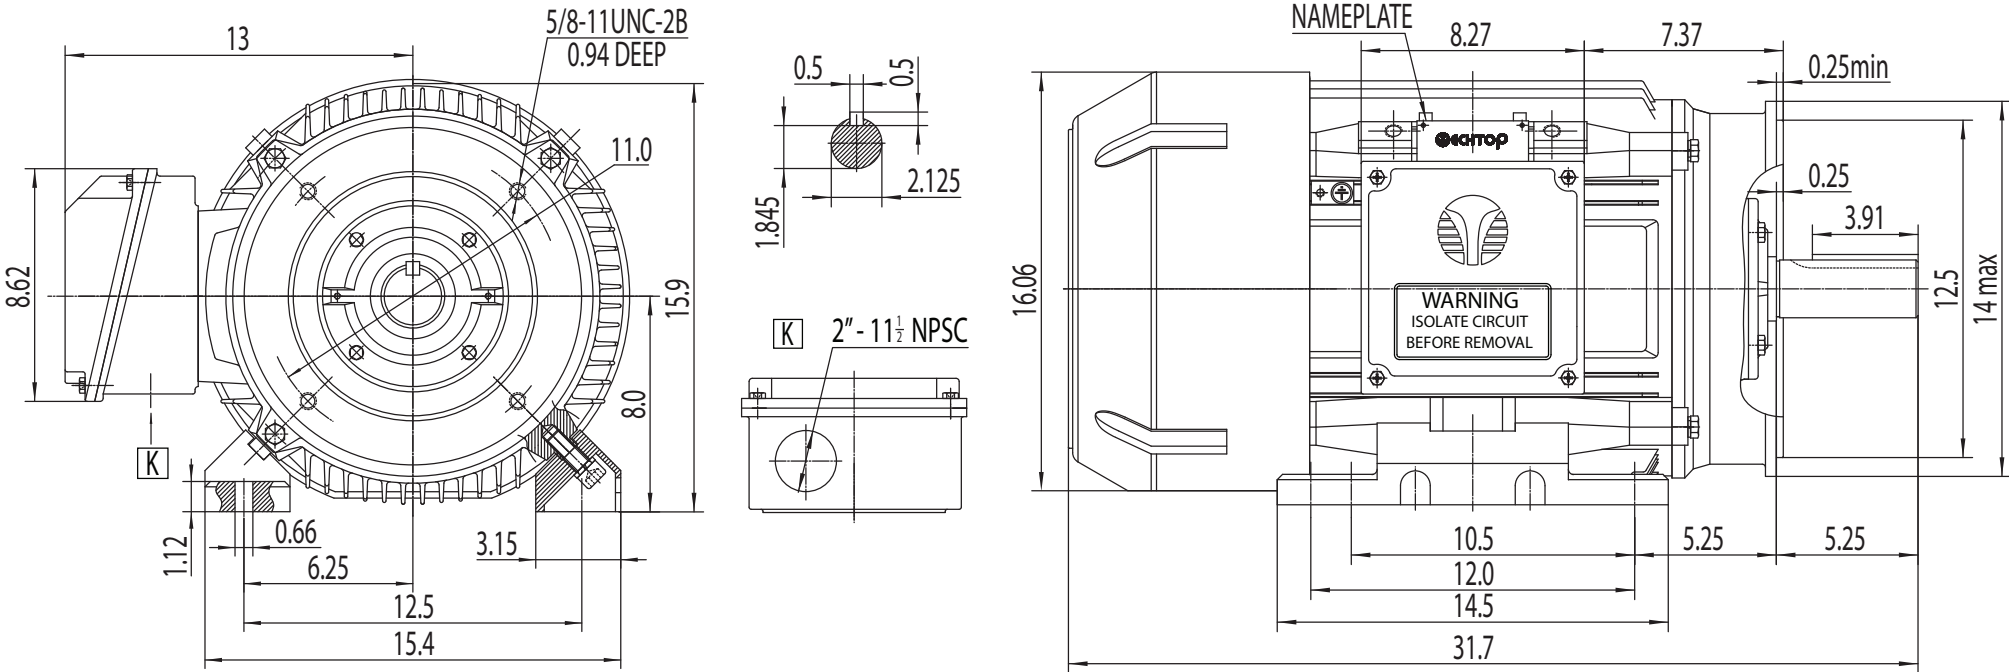

NEMA Premium TEFC 326TC

DRAWING NUMBER:	GR3-CI-TF-326TC-CFC	ISSUED DATE	30/05/25
DIMENSIONS:	Inches		
MOUNTING:	Rigid/C-Flange		
CASING MATERIAL:	Cast Iron		
			PREMIUM T-FRAME CAST IRON MOTORS