

NEMA

Model DPA0102D-TC
MFG PN: TDA213T10U2B

Model DPA0102D-TC

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
DPA0102D-TC	10	3520	230/460	3	60	213TC	Rigid/C-Flange	ODP

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techtopcanada.com

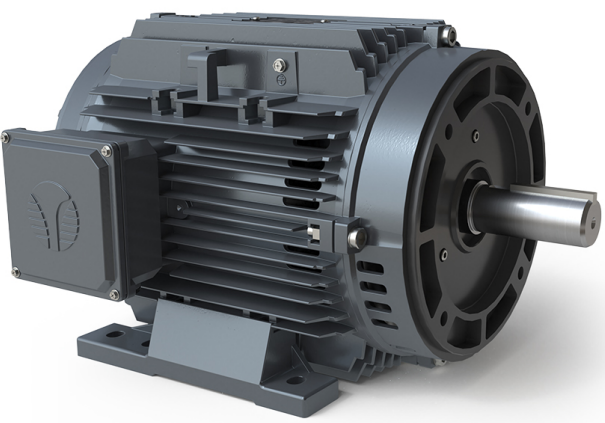

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6



Model DPA0102D-TC
 MFG PN: TDA213T10U2B


ELECTRICAL DATA		
Rated Motor Output Power	10	HP
	7.5	kW
Rated Motor Speed	3520	r/min 60Hz
	2890	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	23.4/11.7	A (I _n) @ 60Hz
	28.9/14.5	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	-	A (I _n) @ 60Hz
FI Current @ 208V	25.8	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	K	60Hz
	G	50Hz
Nominal Efficiency	89.5	% @ 60Hz
Nominal Power Factor	0.9	cosΦ @ 60Hz
Leads (Qty, Size)	9	14
Connection	YY/Y	-
Coil Resistance	-	Ω
Start Capacitor	-	μF/V
Run Capacitor	-	μF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	-	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	213TC	
Enclosure	ODP	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	104.2 lbs.	
Casing Material / Fan Cover	Cast Aluminum	Steel
Shaft Material	1045	
NEMA Design	A	
Degree of Protection (IP)	23	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6308 ZZ	
Bearing ODE Side	6308 ZZ	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	-	
Temperature Code	-	-

Questions? Call 1.888.286.1820

NEMA

Model DPA0102D-TC
 MFG PN: TDA213T10U2B

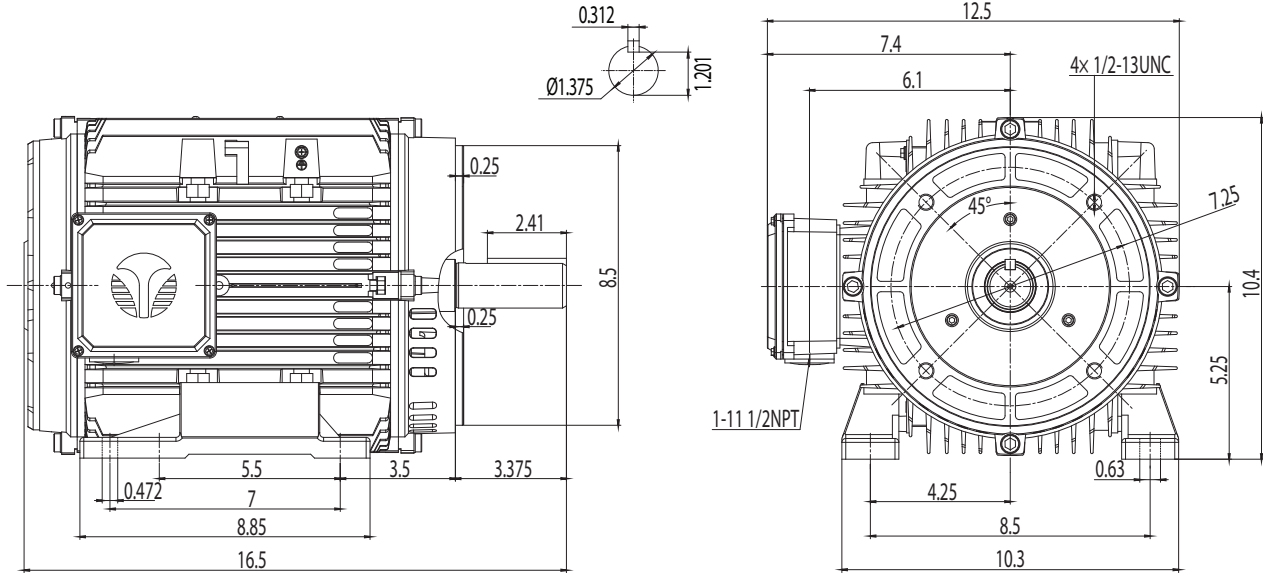

NAMEPLATE DATA	60Hz	50Hz
Horse Power	10	10
RPM	3520	2890
Voltage	230/460	190/380
Full Load Amps	23.4/11.7	28.9/14.5
Service Factor	1.25	1
KVA Code	K	G
Full Load Amps (208V)	25.8	-
Nominal Efficiency	89.5	87.5
Nominal Power Factor	0.9	0.9
Design	A	
Frame	213TC	
Enclosure Type	ODP	
IP Rating	23	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6308 ZZ	
Opposite Drive End Bearing	6308 ZZ	
Weight (lbs)	104.2	

NAMEPLATE LAYOUT

TECHTOP INDUSTRIAL THREE PHASE MOTOR
 INVERTER DUTY 15:1 CT 30:1 VT - 1.0 SF

MODEL MFG PN

60Hz 50Hz

HP MFG DATE

RPM SER #

VOLT DESIGN

FLA FRAME

SF ENCL / IP ODP 23

KVA CODE DUTY

NOM.EFF INS CL

EFF 75% AMB

PF DE

USABLE AT 208V ODE

NEMA Premium WEIGHT

TECHTOPCANADA.COM

MADE IN CHINA

CC088A

SP 224655

Energy Verified Only

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	-
Class / Division	-
Groups	-

Questions? Call 1.888.286.1820

NEMA

Model DPA0102D-TC
MFG PN: TDA213T10U2B

Torque Speed (T-n) Curve

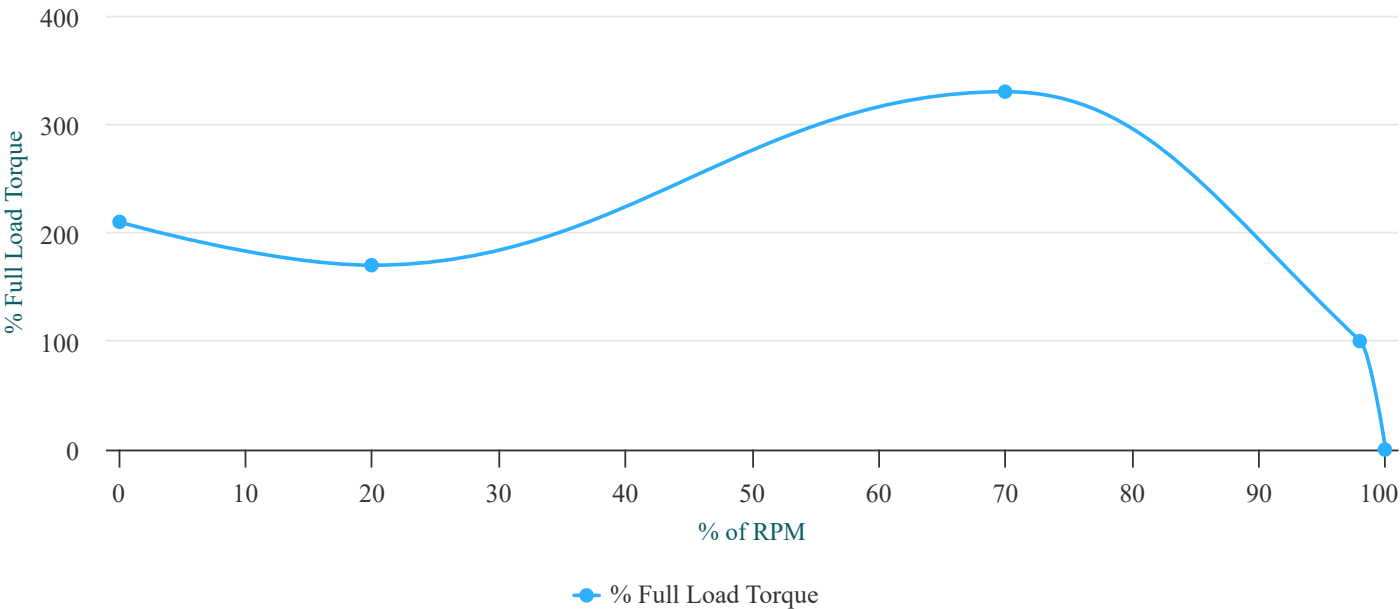

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)
Locked Rotor Torque	14.9	210
Pull-Up Torque	25.4	170
Breakdown Torque	49.3	330
Full Load Torque	31.3	100

TYPICAL PERFORMANCE - NOT GUARANTEED VALUES


PERFORMANCE VALUES	
Start Configuration	DOL
Starting Current (A)	-
No-Load Current (A)	-
No-Load Power Factor	-

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	-	-	-	-	-	-
Efficiency (%)	-	89	90	89.5	-	-
Speed (r/min)	-	-	-	-	-	-
Power Factor (cosΦ)	-	0.81	0.88	0.9	-	-
Input Power (kW)	-	-	-	-	-	-

Questions? **Call 1.888.286.1820**



Model **DPA0102D-TC**
MFG PN: TDA213T10U2B

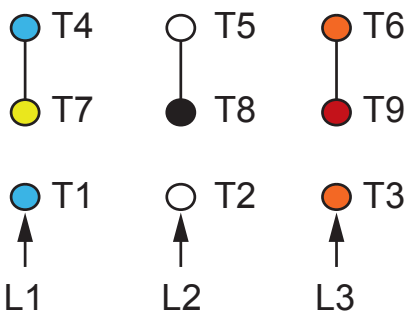

HIGH VOLTAGE
(Y)



LOW VOLTAGE
(YY)

- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY




NEMA 3Ø YY/Y 9-Lead Dual Voltage

DRAWING NUMBER:	NEMA-3-9-YY-Y	ISSUED DATE	16/06/25
CONNECTION:	YY/Y	PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP	
NUMBER OF LEADS:	9		
THERMAL PROTECTION:	-		



Model **DPA0102D-TC**
MFG PN: TDA213T10U2B

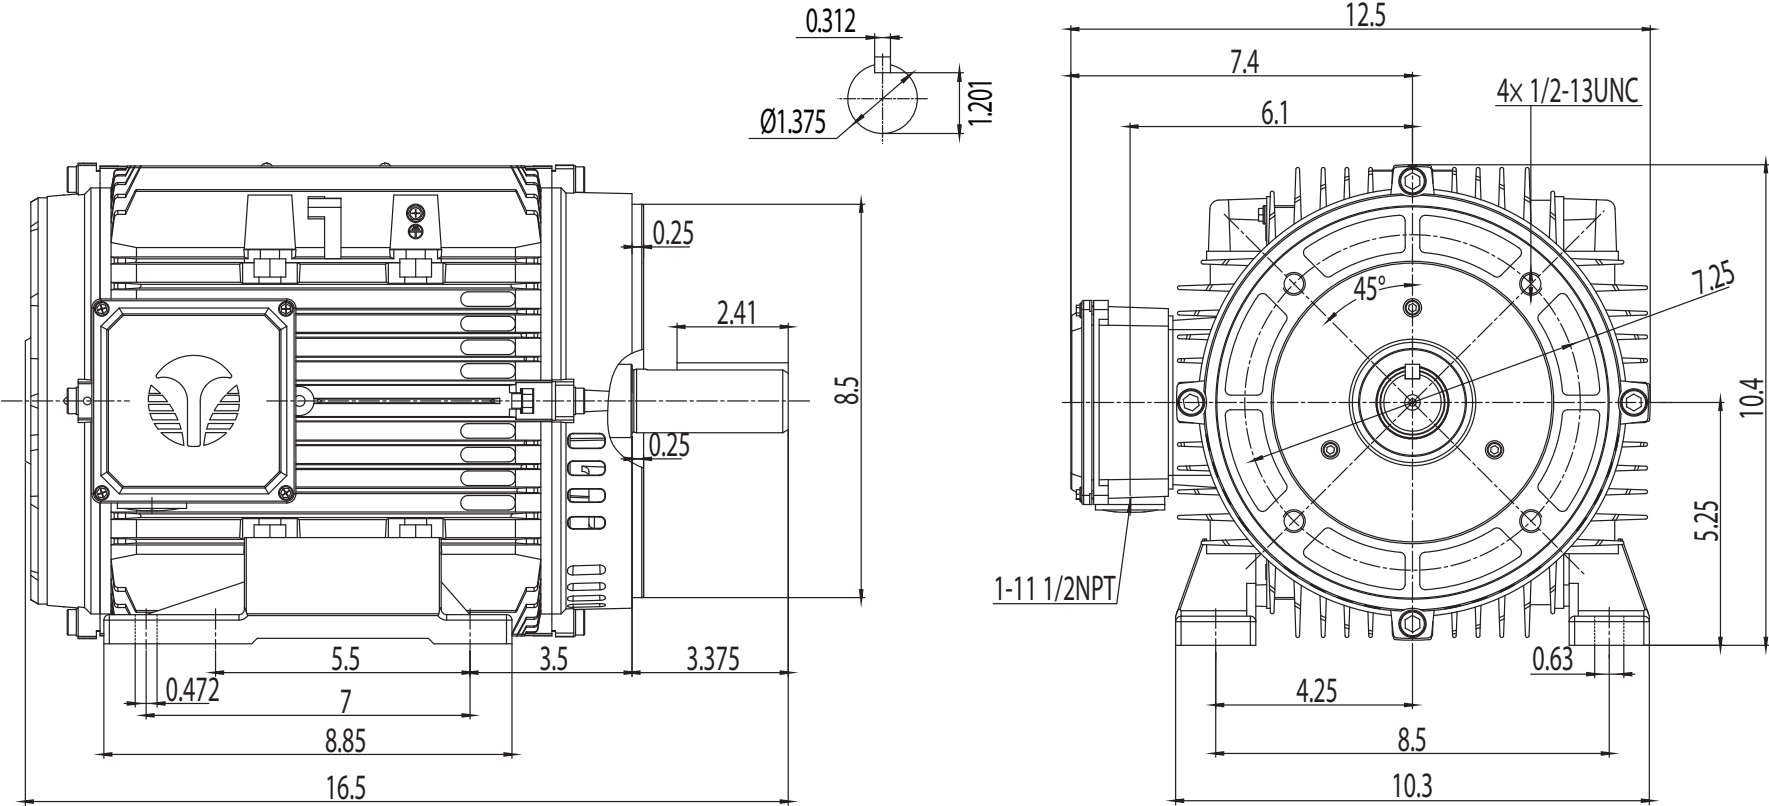

NEMA Premium ODP 213TC

DRAWING NUMBER:	GR3-AL-DP-213(5)TC	ISSUED DATE	16/06/25
DIMENSIONS:	Inches	PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP	
MOUNTING:	Rigid/C-Flange		
CASING MATERIAL:	Cast Aluminum		