

NEMA

Model DPA0402DS-TC
MFG PN: TDA 286TS40U2B

Model DPA0402DS-TC

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
DPA0402DS-TC	40	3550	230/460	3	60	286TSC	Rigid/C-Flange	ODP

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techtopcanada.com

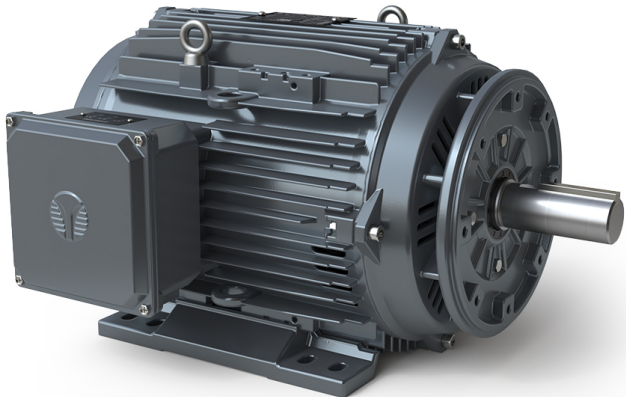

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6



Model DPA0402DS-TC
 MFG PN: TDA 286TS40U2B


ELECTRICAL DATA		
Rated Motor Output Power	40	HP
	30	kW
Rated Motor Speed	3550	r/min 60Hz
	2945	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	-	V/50Hz
Rated Motor Current	92.13/46.07	A (I _n) @ 60Hz
	111.96/55.98	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	-	A (I _n) @ 60Hz
FI Current @ 208V	101.87	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	J	60Hz
	H	50Hz
Nominal Efficiency	92.4	% @ 60Hz
Nominal Power Factor	0.88	cosΦ @ 60Hz
Leads (Qty, Size)	12	12
Connection	DD/D	-
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	-	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	286TSC	
Enclosure	ODP	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	331 lbs.	
Casing Material / Fan Cover	Cast Aluminum	Steel
Shaft Material	1045	
NEMA Design	B	
Degree of Protection (IP)	23	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	YES	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6311 C3	
Bearing ODE Side	6311 C3	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	-	
Temperature Code	-	-

Questions? Call 1.888.286.1820

NEMA

Model DPA0402DS-TC
 MFG PN: TDA 286TS40U2B

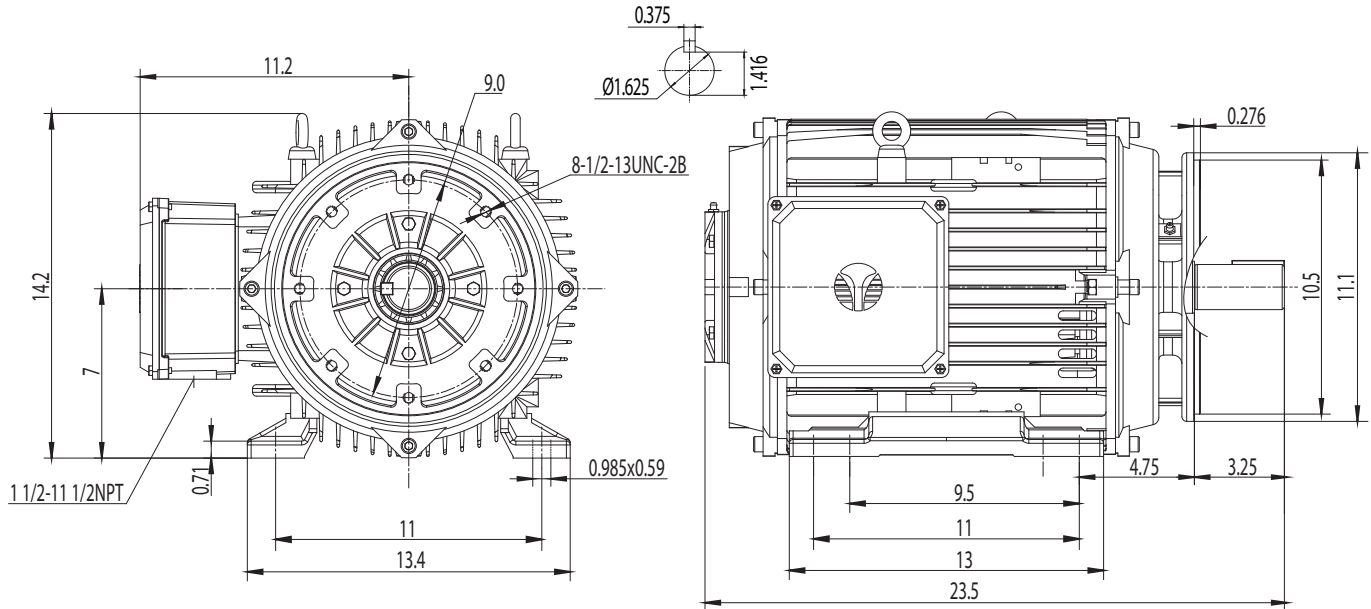

NAMEPLATE DATA	60Hz	50Hz
Horse Power	40	40
RPM	3550	2945
Voltage	230/460	-
Full Load Amps	92.13/46.07	111.96/55.98
Service Factor	1.25	1
KVA Code	J	H
Full Load Amps (208V)	101.87	-
Nominal Efficiency	92.4	91
Nominal Power Factor	0.88	0.89
Design	B	
Frame	286TSC	
Enclosure Type	ODP	
IP Rating	23	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6311 C3	
Opposite Drive End Bearing	6311 C3	
Weight (lbs)	331	

NAMEPLATE LAYOUT

TECHTOP INDUSTRIAL THREE PHASE MOTOR
 INVERTER DUTY 15:1 CT 30:1 VT - 1.0 SF

MODEL MFG PN

60Hz 50Hz

HP MFG DATE

RPM SER #

VOLT DESIGN

FLA FRAME

SF ENCL / IP ODP 23

KVA CODE DUTY

NOM.EFF INS CL

EFF 75% AMB

PF DE

USABLE AT 208V ODE

NEMA Premium WEIGHT

TECHTOPCANADA.COM

MADE IN CHINA

CE

CC088A

SP 224653

Energy Verified Only

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	-
Class / Division	-
Groups	-

Questions? Call 1.888.286.1820



Model DPA0402DS-TC
MFG PN: TDA 286TS40U2B

Torque Speed (T-n) Curve

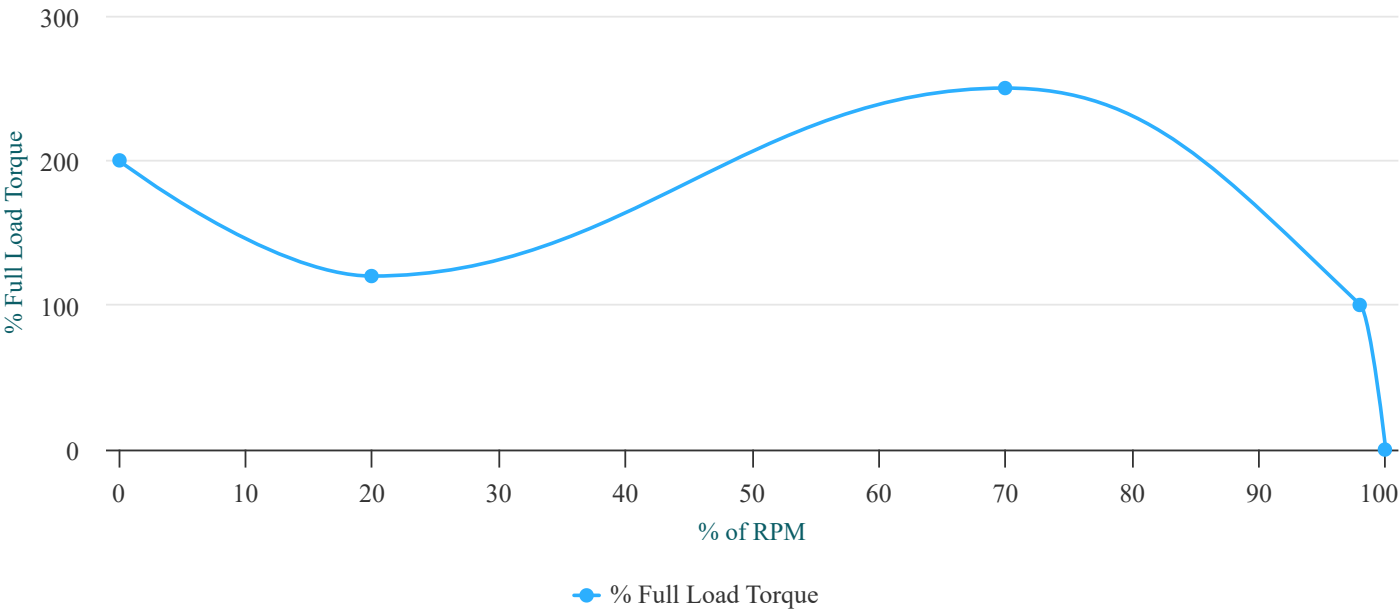



PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	59.2	200	Start Configuration	DOL
Pull-Up Torque	71.1	120	Starting Current (A)	-
Breakdown Torque	148	250	No-Load Current (A)	-
Full Load Torque	118.4	100	No-Load Power Factor	-


TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	-	-	-	-	-	-
Efficiency (%)	-	-	-	-	-	-
Speed (r/min)	-	-	-	-	-	-
Power Factor (cosΦ)	-	-	-	-	-	-
Input Power (kW)	-	-	-	-	-	-

Questions? **Call 1.888.286.1820**

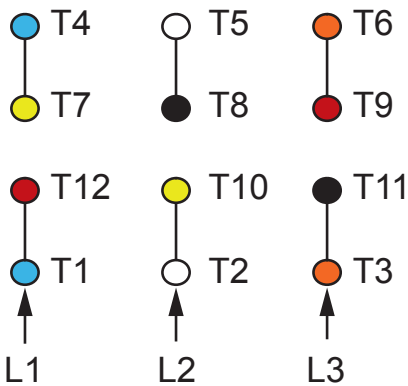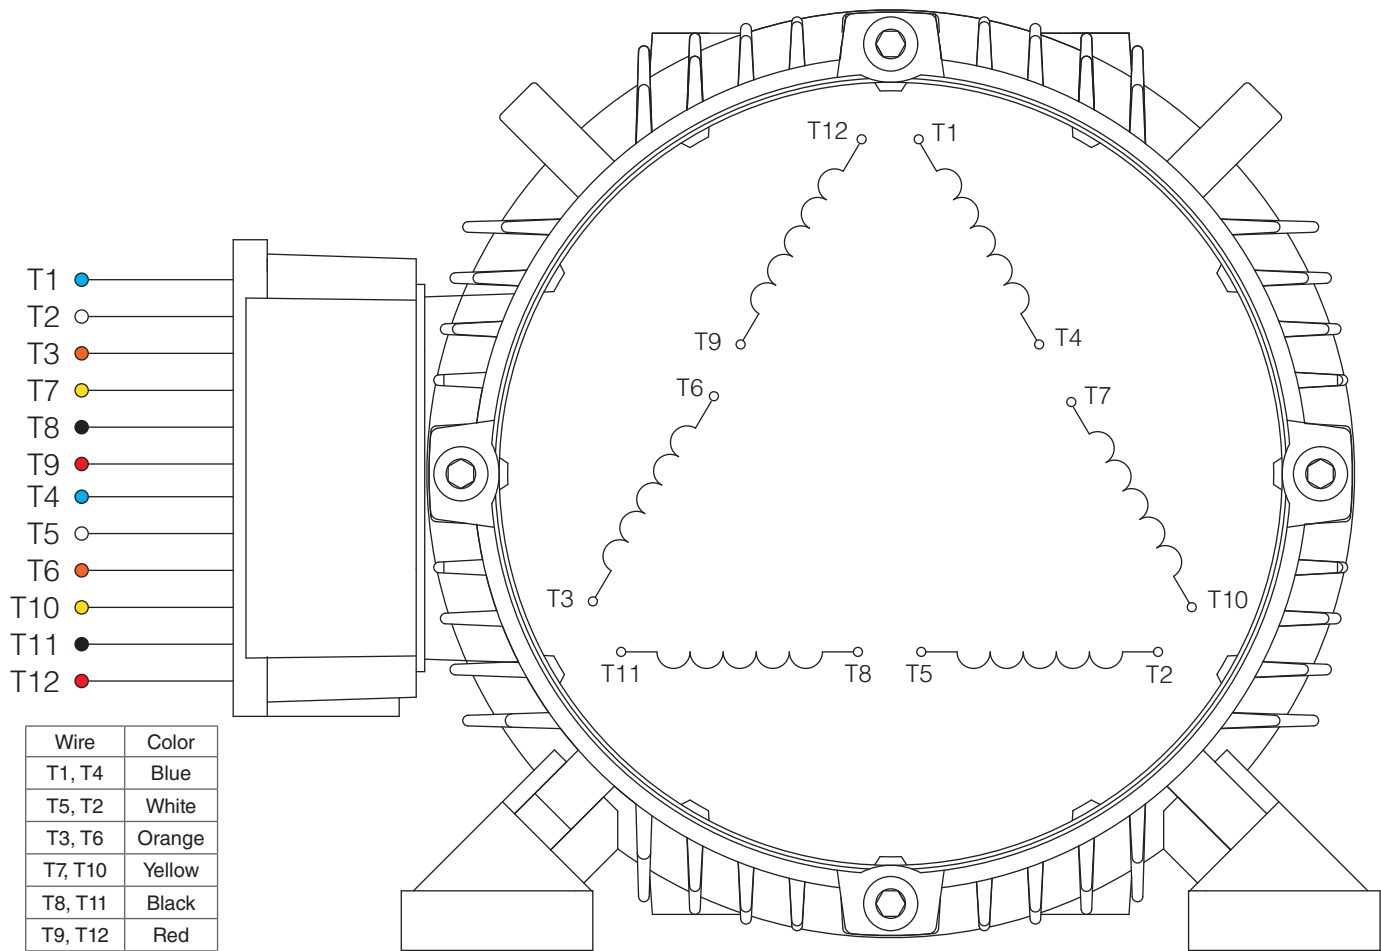

HIGH VOLTAGE
(Δ)

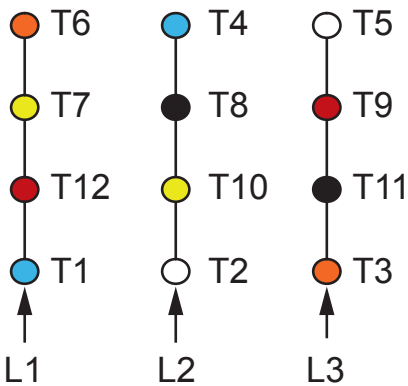

LOW VOLTAGE
(ΔΔ)

- NOTES:
1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH "*" EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 5. DIAGRAMS FOR REFERENCE ONLY




 TECHTOP <i>You can't top a Techtop.</i>		NEMA 3Ø DD/D 12-Lead Dual Voltage	
DRAWING NUMBER:	NEMA-3-12-DD-D	ISSUED DATE	20/06/25
CONNECTION:	DD/D		
NUMBER OF LEADS:	12	PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP	
THERMAL PROTECTION:	-		

NEMA 3Ø DD/D 12-Lead Dual Voltage



Model **DPA0402DS-TC**
MFG PN: TDA 286TS40U2B

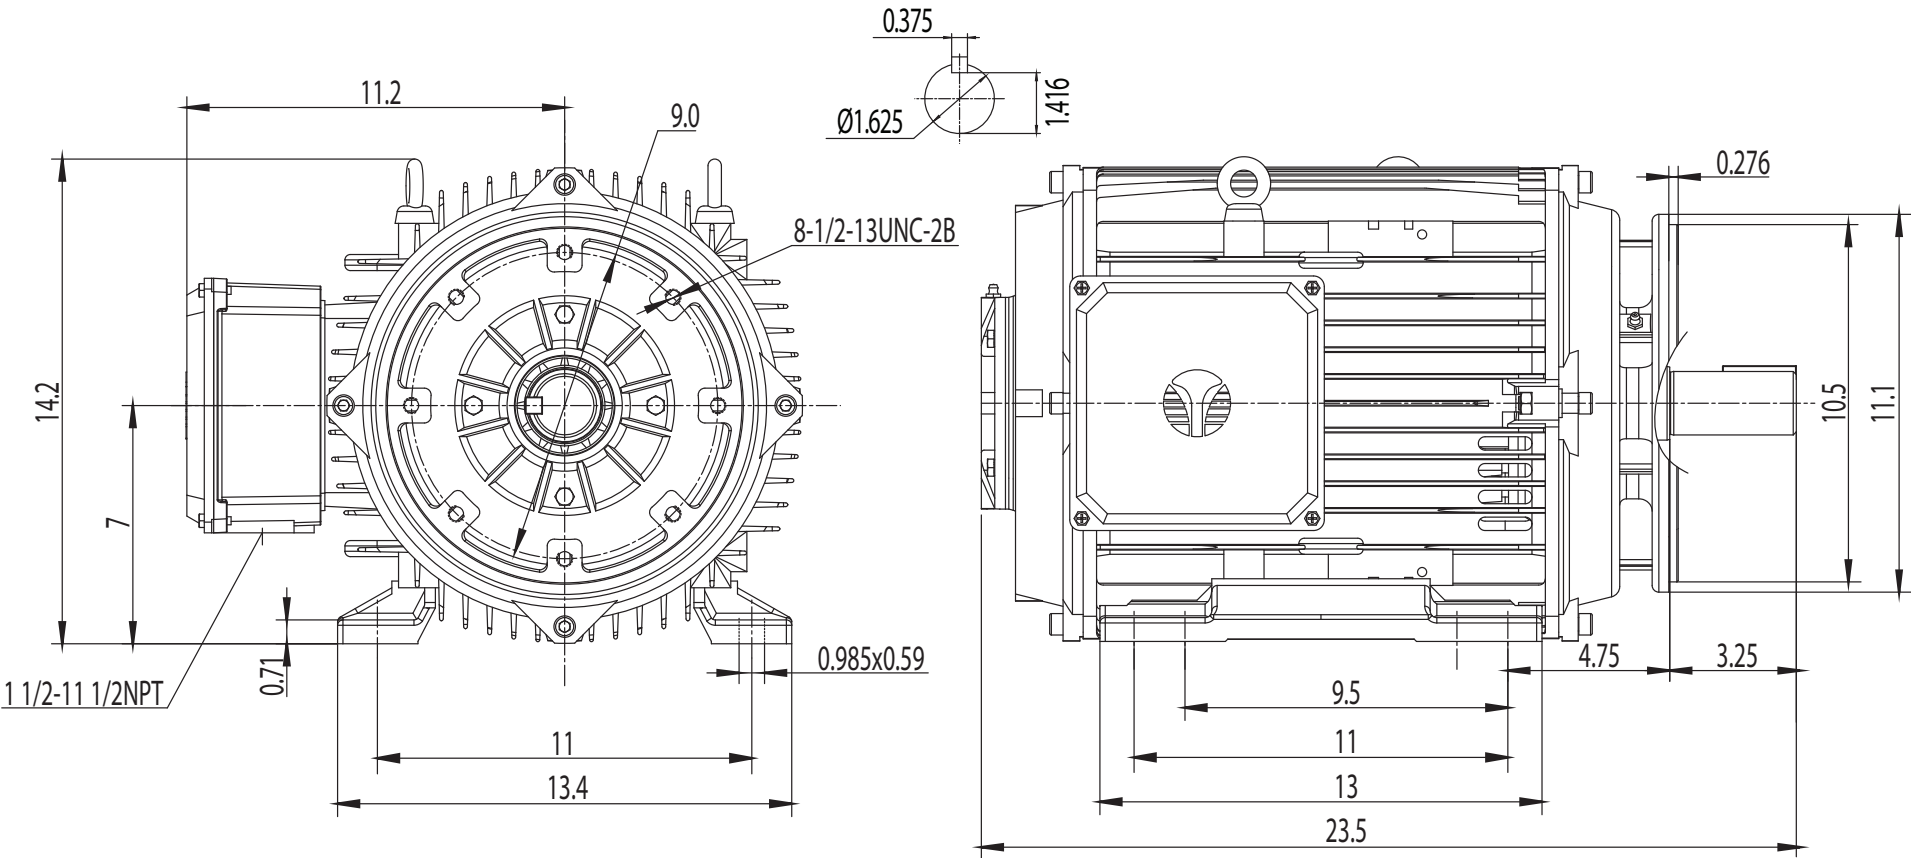

NEMA Premium ODP 286TSC

DRAWING NUMBER:	GR3-AL-DP-284(6)TSC	ISSUED DATE	20/06/25
DIMENSIONS:	Inches	PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP	
MOUNTING:	Rigid/C-Flange		
CASING MATERIAL:	Cast Aluminum		