

NEMA

Model DPC2502ES-TC
MFG PN: TDC 445TS250U2B

Model DPC2502ES-TC

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
DPC2502ES-TC	250	3575	460	3	60	445TSC	Rigid/C-Flange	ODP

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techttopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techttopcanada.com

Moncton


PHONE 506.386.5794
EMAIL infoNB@techttopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techttopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techttopcanada.com

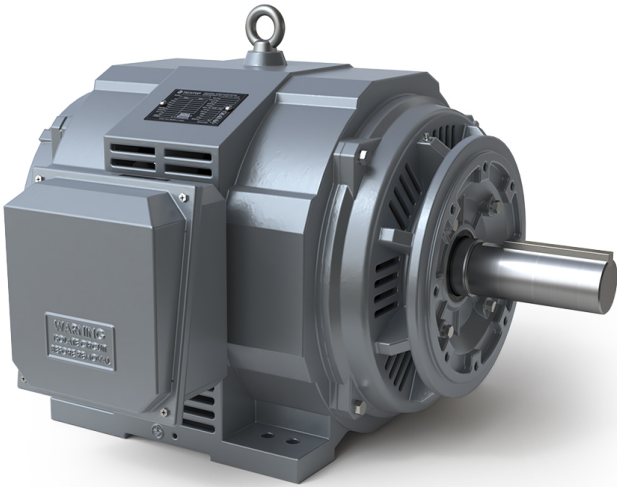

Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6



Model DPC2502ES-TC
 MFG PN: TDC 445TS250U2B


ELECTRICAL DATA		
Rated Motor Output Power	250	HP
	185	kW
Rated Motor Speed	3575	r/min 60Hz
	2955	r/min 50Hz
Rated Motor Voltage (+/-10%)	460	V/60Hz
	380	V/50Hz
Rated Motor Current	273.78	A (I _n) @ 60Hz
	332.68	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	1995	A (I _n) @ 60Hz
FI Current @ 208V	-	A (I _n) @ 60Hz
Service Factor	1.15	@ 60Hz
	1	@ 50Hz
KVA Code	J	60Hz
	H	50Hz
Nominal Efficiency	95	% @ 60Hz
Nominal Power Factor	0.9	cosΦ @ 60Hz
Leads (Qty, Size)	6	1
Connection	D	-
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	49.9	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	445TSC	
Enclosure	ODP	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	1480 lbs.	
Casing Material / Fan Cover	Cast Iron	-
Shaft Material	4140	
NEMA Design	A	
Degree of Protection (IP)	23	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	NO	YES
Paintwork	7024	
	Graphite Gray	
MECHANICAL DATA		
Bearing DE Side	6316 C3	
Bearing ODE Side	6316 C3	
Grease Type	Mobil Polyrex EM	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	-	
Temperature Code	-	-

Questions? Call 1.888.286.1820

NEMA

Model DPC2502ES-TC
 MFG PN: TDC 445TS250U2B

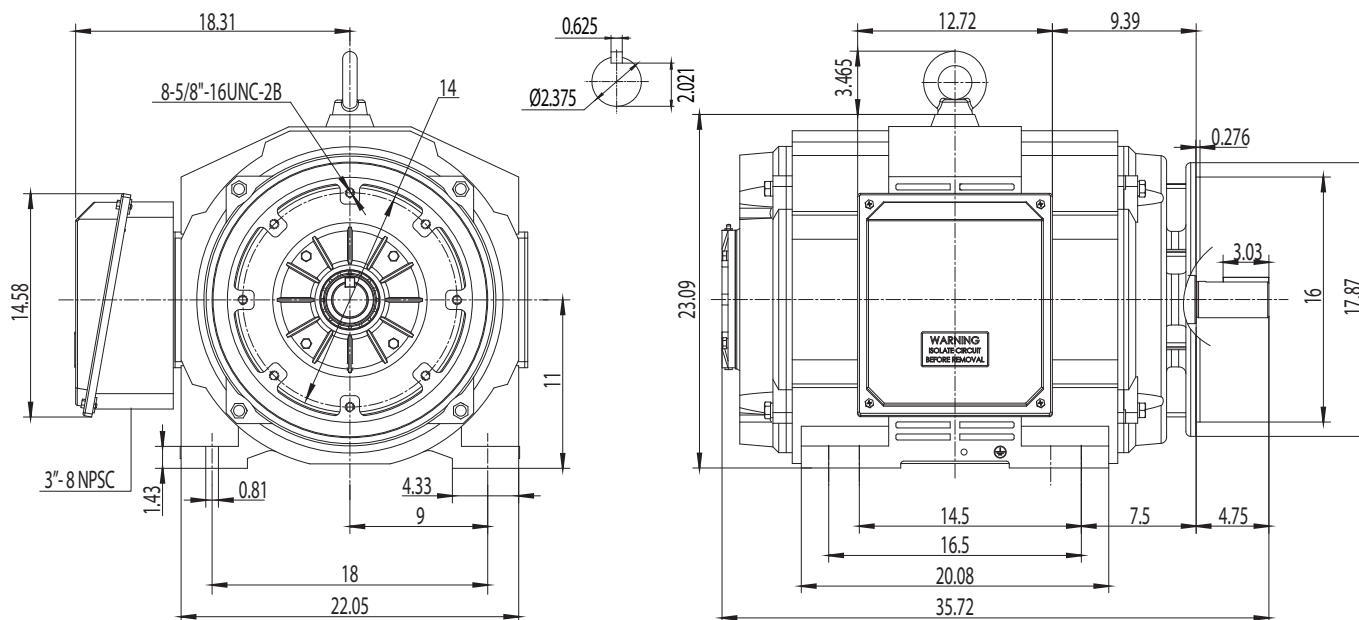

NAMEPLATE DATA	60Hz	50Hz
Horse Power	250	250
RPM	3575	2955
Voltage	460	380
Full Load Amps	273.78	332.68
Service Factor	1.15	1
KVA Code	J	H
Full Load Amps (208V)	-	-
Nominal Efficiency	95	93.6
Nominal Power Factor	0.9	0.91
Design	A	
Frame	445TSC	
Enclosure Type	ODP	
IP Rating	23	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6316 C3	
Opposite Drive End Bearing	6316 C3	
Weight (lbs)	1480	

NAMEPLATE LAYOUT

TECHTOP		INDUSTRIAL THREE PHASE MOTOR INVERTER DUTY 15:1 CT 30:1 VT - 1.0 SF	
MODEL	TECHTOPCANADA.COM		
NEMA Premium	60Hz	50Hz	MFG PN
HP			MFG DATE
RPM			SER #
VOLT			DESIGN
FLA			FRAME
SF			ENCL
KVA CODE			IP
NOM.EFF			DUTY
USABLE AT 208V 60Hz	BEARING SIZE		INS CL
FLA	DE	ODE	AMB
	GREASE: MOBIL POLYREX EM		WEIGHT
MADE IN CHINA		lbs	

VFD DUTY (S.F. 1.0)

Variable Torque
 Constant Torque

RATIO

30:1
 15:1

Hz*

2 - 60
 4 - 60

*For max speed please contact Techtop Canada

HAZARDOUS LOCATIONS

Class / Division
 Groups


-
 -
 -

Questions? Call 1.888.286.1820



Model DPC2502ES-TC
MFG PN: TDC 445TS250U2B

Torque Speed (T-n) Curve

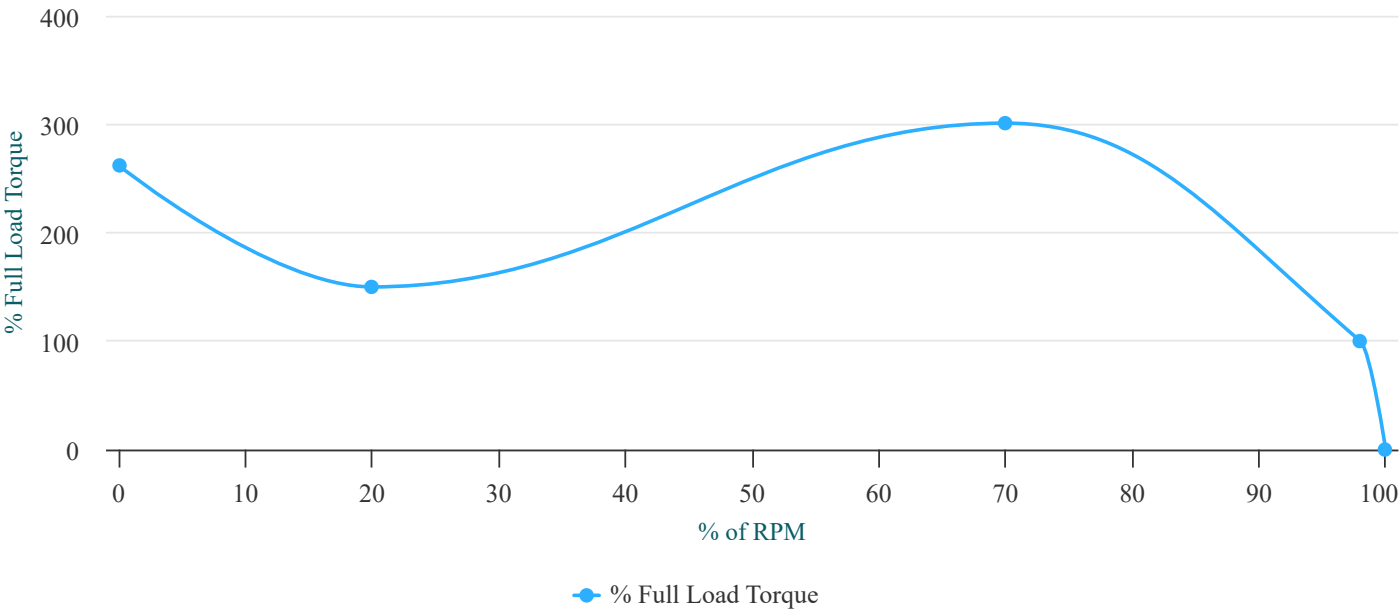

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	962.7	262	Start Configuration	DOL
Pull-Up Torque	551.1	150	Starting Current (A)	1995
Breakdown Torque	1106	301	No-Load Current (A)	68
Full Load Torque	367.4	100	No-Load Power Factor	-


TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.15
Line Amperes (A)	96.7	150.5	211.1	277.5	319.7	319.7
Efficiency (%)	92	94.7	95.2	95	94.7	94.7
Speed (r/min)	3594	3588	3582	3575	3571	3571
Power Factor (cosΦ)	0.66	0.82	0.87	0.89	0.89	0.89
Input Power (kW)	50.67	98.44	146.99	196.42	226.52	226.52

Questions? Call 1.888.286.1820



Model **DPC2502ES-TC**
MFG PN: TDC 445TS250U2B

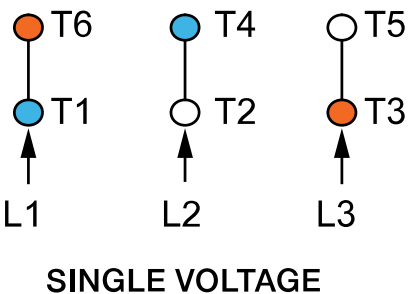

Wire	Color
T1, T4	Blue
T5, T2	White
T3, T6	Orange


- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY



DRAWING NUMBER:	NEMA-3-6-D
CONNECTION:	D
NUMBER OF LEADS:	6
THERMAL PROTECTION:	-

NEMA 3Ø D 6-Lead Single Voltage

ISSUED DATE	30/06/25
PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP	

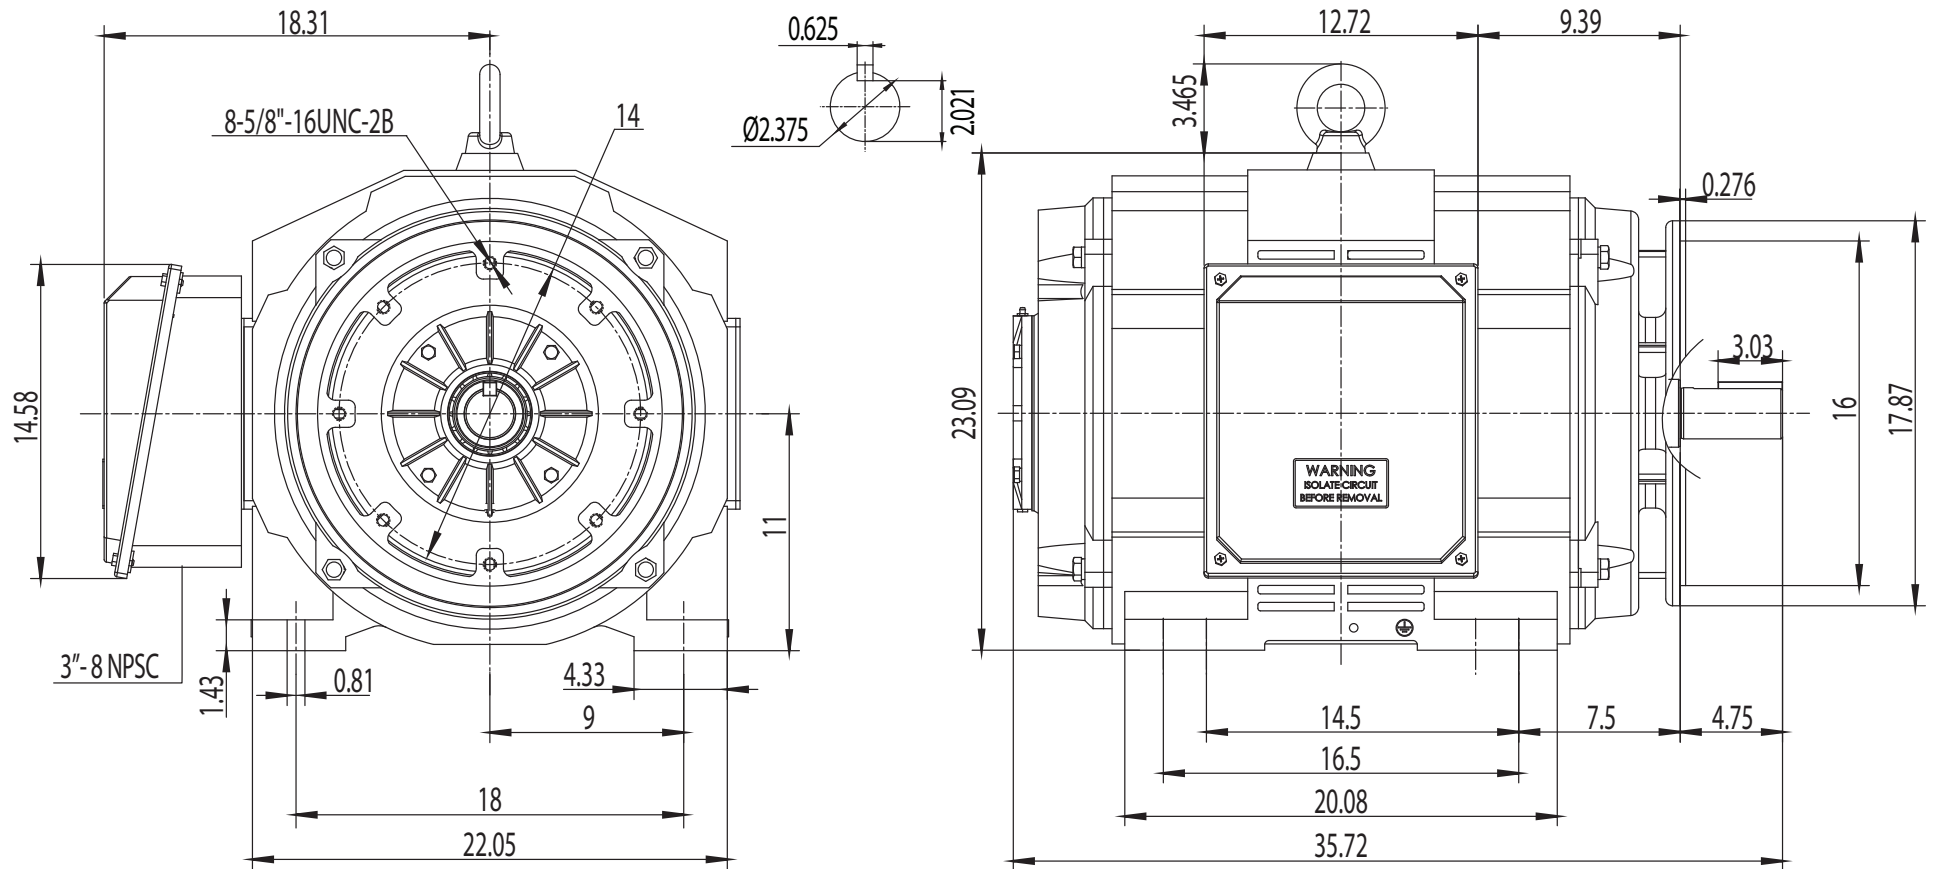

NEMA Premium ODP 445TSC

DRAWING NUMBER:	GR3-CI-DP-444(5)TSC	ISSUED DATE	30/06/25
DIMENSIONS:	Inches		
MOUNTING:	Rigid/C-Flange	PREMIUM T-FRAME ALUMINUM & CAST IRON MOTORS, ODP	
CASING MATERIAL:	Cast Iron		